



GROWING TOGETHER

AGRICULTURAL TIRES

TECHNICAL DATA BOOK



ABBREVIATION LEGEND

Abbreviation	Description
PR	Ply Rating
LI/SS	Load Index / Speed Symbol
Rec.	Recommended
Alt.	Alternative
S.W.	Section Width
O.D.	Overall Diameter
SLR	Static Load Radius
RC	Rolling Circumference
SRI	Speed Radius Index
LR	Load Range
FR	Free Rolling
DW	Drive Wheel
LLV	Low Load Variation
HLV	High Load Variation
LT	Low Torque
HT	High Torque
Cyc.	Cyclic

BKT AGRICULTURAL RANGE

2 - 9

TRACTOR

AGRIMAX V-FLECTO	21
AGRIMAX FORCE	22 - 23
AGRIMAX FORTIS	24 - 25
AGRIMAX SIRIO	26
AGRIMAX RT 657	27 - 31
AGRIMAX RT 765	32 - 38
AGRIMAX RT 855	39 - 47
AGRIMAX SPARGO	48
AGRIMAX RT 945	49 - 50
AGRIMAX RT 955	51 - 54
AGRIMAX ELOS	55 - 56
RT 851	57
RT 853	57
RT 857	58 - 59
RIDEMAX IT 696	60 - 61
RIDEMAX IT 697 (M+S)	62
TR 126	63
TR 128	64
TR 133	64
TR 135	65 - 76
TR 136	77
TR 144	78 - 79
TR 171	80 - 84
FARM 2000	85 - 86
FARM 2000 PLUS	87
FARM SPECIAL	87
AS 2001	88
TRAC FARM	89
TRAC FARM PLUS	90
COMMANDER (R)	91
TR 270	92 - 93
TR 273	94
TR 318	95
PUDDLE SPECIAL	95
TR 459	96 - 97
TR 461	98
TR 463	98
TRAC SUPER	99
AT 316	99

HARVESTER

AGRIMAX TERIS	100 - 102
AGRIMAX RT 600	103 - 104
STAR TRAC	104
TR 137	105
TR 360	106
TR 882	106 - 107
FLOTATION 558	108

PIVOT IRRIGATOR

TR 117	109 - 110
TR 118	110

FLOTATION

RIDEMAX FL 690	111
RIDEMAX FL 693 M	112 - 115
FL 630 PLUS	116
FL 630 SUPER	117 - 119
FL 630 ULTRA	120 - 121
FL 635	122
FL 637	123
FL 639	124
FLOTATION 351	125
FL 353	125
FL 354	126
FLOTATION 558	127
FLOTATION 648	128 - 142
FLOTATION 648 T	143
FLOTATION TR 675	144 - 145
FLOTATION TR 678	146
FLOTATION RIB 774	147

AGRICULTURAL TIRES TECHNICAL DATA BOOK

INDEX

FORESTRY

FORESTECH	148
FS 216	149 - 151
F 240	152
TR 678	152

MULTIUSE

MULTIMAX MP 513	153
MULTIMAX MP 522	154 - 156
MULTIMAX MP 527	157 - 158
MULTIMAX MP 540	159
RT 747 AGRO INDUSTRIAL	160
CON STAR	161
AT 603	162 - 164
AT 621	165 - 167
MP 567	168 - 170
MP 570	171
MP 585	172
MP 590	173
MP 600	174
AS 504	175 - 183

FRONT

TF 8181	184 - 186
TF 9090	187 - 189
TF 9393	190
COMMANDER	190
COMMANDER TWIN RIB	191
COMMANDER 3 RIB	191
POWER RIB F2	192
PRO RIB F2M	192
RIB F3	193
STEER FARM	194

IMPLEMENT

AW 711	195 - 196
AW 702	197 - 202
AW 705	203 - 204
AW 708	205 - 207
AW 726	208
AW 909	209 - 210
AW 09	211 - 212
BK 4040	212
RIB IMPLEMENT (A)	213
RIB IMPLEMENT (B)	213
RIB 713	214
RIB 774 (A)	215
RIB 774 (B)	216
RIB 774 (C)	217
RIB 775	218
RIB 900	218
RIB MASTER	219
FLOTATION RIB IMPLEMENT	219
MULTI RIB	220
AS 504	220 - 230
AS 505	231
AS 507	232
AS 509	232
FARM 2000	233
TR 882	234 - 235
SL 441	236

LAWN & GARDEN

TR 360	237
LG SMOOTH	237
LG 306	238 - 242
LG 307	243
LG 408	244
LG RIB	245
TRAC MASTER	246
TR 313	246
TR 315	247
TR 317	248
TR 319	248

GOLF

GF 304	249
GF 305 CLASSIC	249

TRAILER

GF 305 FARM TRAILER	250
INDUSTRIAL RIB F3	250
I-1	251 - 254
AGRI GRIP	255
FARM HIGHWAY TOUGH	255
BK 823	256
SL 441	257
ST 180	258 - 259
TR 387	260 - 261
TR 390	262
TR 391	263
BK 308	263

TRANSPORT

MH TR 182	264
LT TR 182	265
ST 195	265

ATV

W 207	266 - 268
AT 112	268
AT 108	269 - 270
AT 109	271
AT 110	272
AT 111	273 - 274
AT 111 HD	275
AT 119	275
AT 171	276
BOGMAX	277
SIERRA MAX	277






GO KART

SM 48	278
SM 54	278
SM 68	279

TIRE CARE & SAFETY

READING YOUR TIRE	280 - 281
LOAD INDEX / SPEED SYMBOL	282 - 283
CONVERSION TABLE	284 - 287
MOUNTING & DISMOUNTING	288 - 289
TIRE LIFE & FAILURE	290
HANDLING & STORAGE	290 - 291

TRACTOR

AGRIMAX V-FLECTO AGRIMAX FORCE AGRIMAX FORTIS AGRIMAX SIRIO AGRIMAX RT 657

TRACTOR







AGRIMAX RT 765 AGRIMAX RT 855 AGRIMAX SPARGO AGRIMAX RT 945 AGRIMAX RT 955

TRACTOR

















AGRIMAX ELOS RT 851 RT 853 RT 857 RIDEMAX IT 696

TRACTOR




RIDEMAX IT 697 (M+S) TR 126 TR 128 TR 133 TR 135

TRACTOR

TR 136 TR 144 TR 171 FARM 2000 FARM 2000 PLUS

B = Bias R = Radial

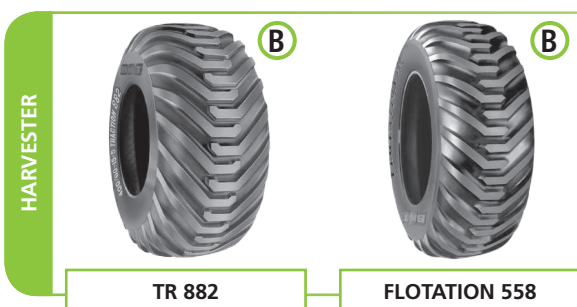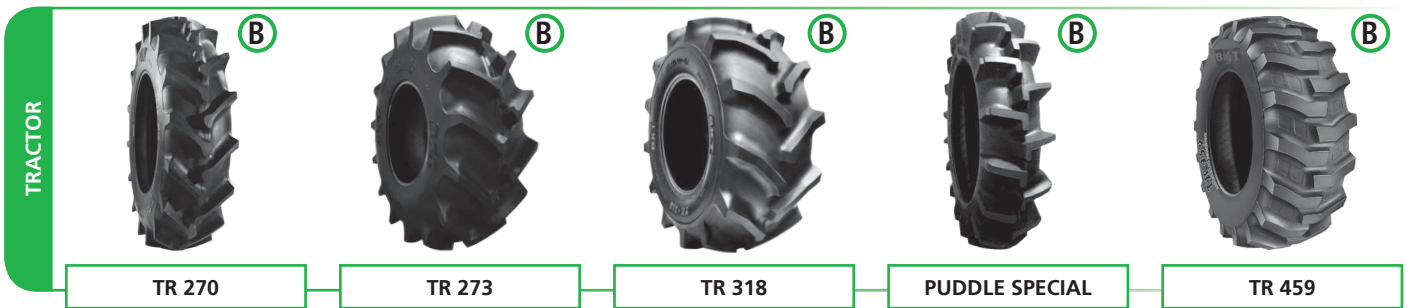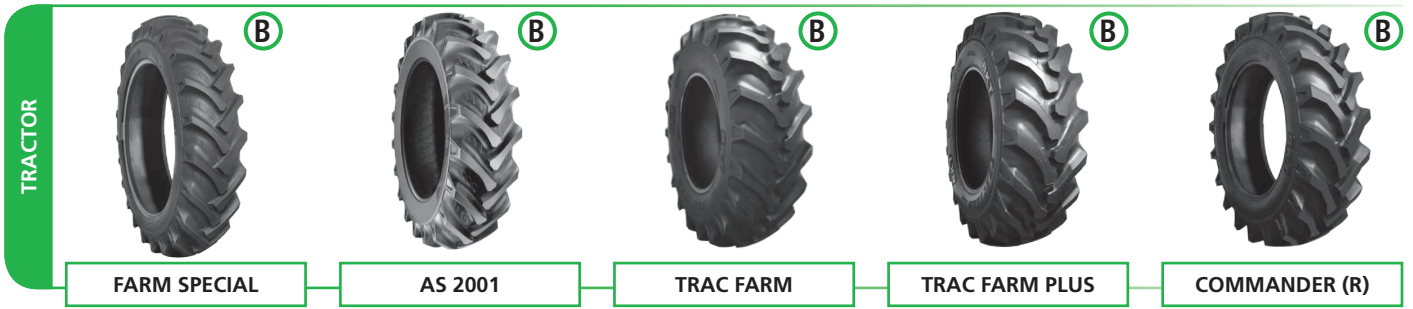

B = Bias R = Radial

PIVOT IRRIGATOR




TR 117 TR 118

FLOTATION







RIDEMAX FL 690 RIDEMAX FL 693 M FL 630 PLUS FL 630 SUPER FL 630 ULTRA

FLOTATION














FL 635 FL 637 FL 639 FLOTATION 351 FL 353

FLOTATION

FL 354 FLOTATION 558 FLOTATION 648 FLOTATION 648 T FLOTATION TR 675





FLOTATION

FLOTATION TR 678 FLOTATION RIB 774

B = Bias R = Radial

FORESTRY

 (B)	 (B)	 (B)	 (B)
FORESTECH	FS 216	F 240	TR 678





MULTIUSE

 (R)	 (R)	 (R)	 (R)	 (R)
MULTIMAX MP 513	MULTIMAX MP 522	MULTIMAX MP 527	MULTIMAX MP 540	RT 747 AGRO INDUSTRIAL

MULTIUSE

 (B)	 (B)	 (B)	 (B)	 (B)
CON STAR	AT 603	AT 621	MP 567	MP 570

MULTIUSE

 (B)	 (B)	 (B)	 (B)
MP 585	MP 590	MP 600	AS 504

FRONT

 (B)	 (B)	 (B)	 (B)	 (B)
TF 8181	TF 9090	TF 9393	COMMANDER (F)	COMMANDER TWIN RIB

B = Bias R = Radial

FRONT

				
COMMANDER 3 RIB	POWER RIB F2	PRO RIB F2M	RIB F3	STEER FARM

IMPLEMENT

				
AW 711	AW 702	AW 705	AW 708	AW 726






IMPLEMENT

				
AW 909	AW 09	BK 4040	RIB IMPLEMENT (A)	RIB IMPLEMENT (B)

IMPLEMENT

				
RIB 713	RIB 774 (A)	RIB 774 (B)	RIB 774 (C)	RIB 775

IMPLEMENT

				
RIB 900	RIB MASTER	FLOTATION RIB IMPLEMENT	MULTI RIB	AS 504

B = Bias R = Radial

IMPLEMENT




AS 505 AS 507 AS 509 FARM 2000 TR 882

IMPLEMENT



SL 441

LAWN & GARDEN



TR 360 LG SMOOTH LG 306 LG 307 LG 408

LAWN & GARDEN



LG RIB TRAC MASTER TR 313 TR 315 TR 317

LAWN & GARDEN



TR 319






GOLF






GF 304 GF 305 CLASSIC

B = Bias R = Radial

TRAILER

				
GF 305 FARM TRAILER	INDUSTRIAL RIB F3	I-1	AGRI GRIP	FARM HIGHWAY TOUGH

TRAILER

				
BK 823	SL 441	ST 180	TR 387	TR 390






TRAILER

	
TR 391	BK 308


TRANSPORT

		
MH TR 182	LT TR 182	ST 195

ATV

				
W 207	AT 112	AT 108	AT 109	AT 110

B = Bias R = Radial

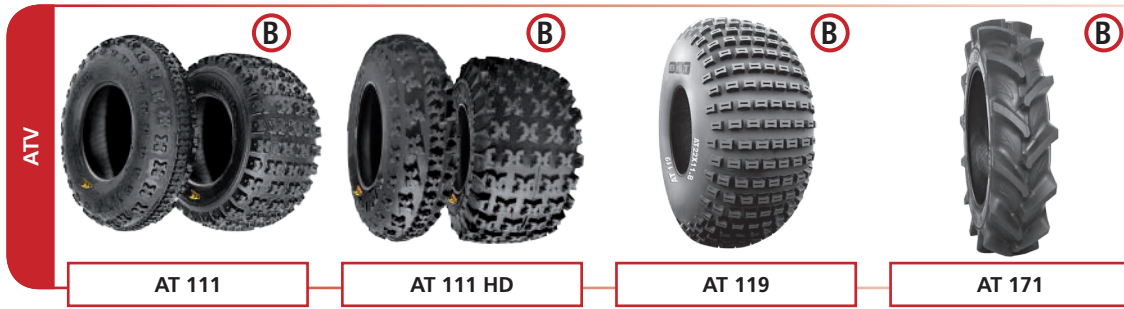

AGRICULTURAL RADIAL TIRES

RIM DIAMETER (inches)	TIRE SIZE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE
14	AT 26 X 9 R 14	SIERRA MAX	277								
	AT 27 X 9 R 14	SIERRA MAX	277								
	AT 26 X 11 R 14	SIERRA MAX	277								
	AT 27 X 11 R 14	SIERRA MAX	277								
15	IF 280/70 R 15	RIB 713	214								
	IF 320/70 R 15	RIB 713	214								
	IF 240/80 R 15	RIB 713	214								
	IF 265/85 R 15	RIB 713	214								
16	320/65 R 16	AGRIMAX RT 657	27								
	200/70 R 16	AGRIMAX RT 765	32								
	220/70 R 16	AGRIMAX RT 765	32								
	240/70 R 16	AGRIMAX RT 765	32								
	260/70 R 16	AGRIMAX RT 765	32								
	280/70 R 16	AGRIMAX RT 765	32								
	180/95 R 16	AGRIMAX RT 855	39								
	210/95 R 16	AGRIMAX RT 855	39								
16.5	380/55 R 16.5	AW 711	195								
	395/55 R 16.5	AW 711	195								
	340/60 R 16.5	AW 711	195								
	265/70 R 16.5	AW 711	195								
	305/70 R 16.5	AW 711	195								
17	VF 480/45 R 17	AW 711	196								
	440/50 R 17	TRAC SUPER	99								
	500/50 R 17	RIDEMAX FL 693 M	112								
	520/50 R 17	FL 637	123								
	425/55 R 17	MULTIMAX MP 513	153								
18	440/55 R 18	AW 711	196								
	400/60 R 18	AW 711	196								
	320/65 R 18	AGRIMAX RT 657	27								
	340/65 R 18	AGRIMAX RT 657	27								
	IF 340/65 R 18	AW 711	196								
	280/70 R 18	AGRIMAX RT 765	32								
	365/70 R 18	MULTIMAX MP 513	153								
	280/80 R 18	MULTIMAX MP 522	154								
	340/80 R 18	MULTIMAX MP 522	154	MULTIMAX MP 527	157	RIDEMAX IT 696	60				
	210/95 R 18	AGRIMAX RT 855	39								
19.5	15 R 19.5	AW 711	196								
20	340/65 R 20	AGRIMAX RT 657	27								
	420/65 R 20	AGRIMAX RT 657	27								
	440/65 R 20	AGRIMAX RT 657	28								
	260/70 R 20	AGRIMAX RT 765	33								
	280/70 R 20	AGRIMAX RT 765	33								
	300/70 R 20	AGRIMAX RT 765	33								
	320/70 R 20	AGRIMAX RT 765	33								
	360/70 R 20	AGRIMAX RT 765	33								
	375/70 R 20	MULTIMAX MP 513	153								
	380/70 R 20	AGRIMAX RT 765	33								
	400/70 R 20	MULTIMAX MP 522	154	MULTIMAX MP 527	157						
	405/70 R 20	MULTIMAX MP 513	153								
	14.9L R 20	RT 851	57								
	380/75 R 20	MULTIMAX MP 522	154								
	425/75 R 20	MULTIMAX MP 513	153								
	335/80 R 20	MULTIMAX MP 540	159								
	340/80 R 20	MULTIMAX MP 522	154	MULTIMAX MP 527	157						
	250/85 R 20	AGRIMAX RT 855	39								
	280/85 R 20	AGRIMAX RT 855	40								
	320/85 R 20	AGRIMAX RT 855	40								
	210/90 R 20	AGRIMAX RT 855	39								
	210/95 R 20	AGRIMAX RT 855	39								

RIM DIAMETER (inches)	TIRE SIZE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE		
22	250/85 R 22	AGRIMAX RT 855	40								
22.5	620/40 R 22.5	FL 635	122								
	710/40 R 22.5	FL 630 PLUS	116	FL 630 ULTRA	120	FL 635	122	FL 639	124		
	500/45 R 22.5	RIDEMAX FL 693 M	112								
	560/45 R 22.5	FL 630 PLUS	116	FL 630 ULTRA	120	FL 639	124	RIDEMAX FL 693 M	112		
	750/45 R 22.5	FL 635	122								
	600/50 R 22.5	FL 630 PLUS	116	FL 639	124	RIDEMAX FL 693 M	113				
	650/50 R 22.5	RIDEMAX FL 693 M	113								
	560/55 R 22.5	RIDEMAX FL 693 M	112								
	650/55 R 22.5	FL 635	122								
	500/60 R 22.5	FL 630 ULTRA	120	RIDEMAX FL 693 M	112						
	560/60 R 22.5	FL 630 PLUS	116	FL 630 SUPER	117	FL 630 ULTRA	120	RIDEMAX FL 693 M	113		
	580/65 R 22.5	FL 630 SUPER	117	RIDEMAX FL 693 M	113						
	24	420/65 R 24	AGRIMAX RT 657	28							
440/65 R 24		AGRIMAX RT 657	28								
480/65 R 24		AGRIMAX RT 657	28								
540/65 R 24		AGRIMAX RT 657	28								
320/70 R 24		AGRIMAX RT 765	34								
360/70 R 24		AGRIMAX RT 765	34								
380/70 R 24		AGRIMAX RT 765	34								
400/70 R 24		MULTIMAX MP 522	155	MULTIMAX MP 527	157						
420/70 R 24		AGRIMAX RT 765	34								
460/70 R 24		MULTIMAX MP 522	155	MULTIMAX MP 527	158	RT 747 AGRO INDUSTRIAL	160				
480/70 R 24		AGRIMAX RT 765	34								
495/70 R 24		MULTIMAX MP 513	153								
500/70 R 24		RT 747 AGRO INDUSTRIAL	160	MULTIMAX MP 522	155	MULTIMAX MP 527	158				
540/70 R 24		MULTIMAX MP 522	156								
300/80 R 24		RIDEMAX IT 696	60								
340/80 R 24		RIDEMAX IT 696	60								
400/80 R 24		MULTIMAX MP 522	155	MULTIMAX MP 527	157	RIDEMAX IT 696	60				
440/80 R 24		MULTIMAX MP 522	155	MULTIMAX MP 527	158						
250/85 R 24		AGRIMAX RT 855	40								
280/85 R 24		AGRIMAX RT 855	40								
320/85 R 24		AGRIMAX RT 855	40	RT 857	58						
340/85 R 24		AGRIMAX RT 855	41								
380/85 R 24		AGRIMAX RT 855	41								
420/85 R 24	AGRIMAX RT 855	41									
210/90 R 24	AGRIMAX RT 955	51									
26	750/65 R 26	AGRIMAX TERIS	100								
	28L R 26	RIDEMAX FL 690	111								
	620/75 R 26	AGRIMAX RT 600	103	AGRIMAX TERIS	100						
	480/80 R 26	MULTIMAX MP 522	156								
	420/85 R 26	RT 857	58								
	460/85 R 26	RT 857	58								
26.5	750/45 R 26.5	FL 630 SUPER	118								
	800/45 R 26.5	FL 630 PLUS	116								
	710/50 R 26.5	FL 630 SUPER	118	FL 630 ULTRA	121	RIDEMAX FL 693 M	114				
	600/55 R 26.5	FL 630 SUPER	117	FL 630 ULTRA	121	RIDEMAX FL 693 M	114				
	650/55 R 26.5	FL 630 SUPER	117	FL 630 ULTRA	121	RIDEMAX FL 693 M	114				
	750/60 R 26.5	FL 630 SUPER	118								
	650/65 R 26.5	FL 630 SUPER	118								

AGRICULTURAL RADIAL TIRES

RIM DIAMETER (inches)	TIRE SIZE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE
28	420/65 R 28	AGRIMAX RT 657	29								
	440/65 R 28	AGRIMAX RT 657	29								
	480/65 R 28	AGRIMAX RT 657	29								
	540/65 R 28	AGRIMAX RT 600	103	AGRIMAX RT 657	29						
	600/65 R 28	AGRIMAX RT 657	29								
	360/70 R 28	AGRIMAX RT 765	34								
	380/70 R 28	AGRIMAX RT 765	35								
	420/70 R 28	AGRIMAX RT 765	35								
	480/70 R 28	AGRIMAX RT 765	35								
	IF 600/70 R 28	AGRIMAX FORCE	22								
	400/80 R 28	RIDEMAX IT 696	60								
	440/80 R 28	MULTIMAX MP 522	156	MULTIMAX MP 527	158	RIDEMAX IT 696	60				
	250/85 R 28	AGRIMAX RT 855	41								
	280/85 R 28	AGRIMAX RT 855	41								
	320/85 R 28	AGRIMAX RT 855	41	RT 857	58						
	340/85 R 28	AGRIMAX RT 855	42	RT 857	58						
	380/85 R 28	AGRIMAX RT 855	42	RT 857	59						
	420/85 R 28	AGRIMAX RT 855	42	AGRIMAX ELOS	55	RT 857	59				
210/95 R 28	AGRIMAX RT 955	51									
30	VF 600/60 R 30 NRO	AGRIMAX V - FLECTO	21								
	IF 710/60 R 30	AGRIMAX FORCE	22								
	420/65 R 30	AGRIMAX RT 657	30								
	540/65 R 30	AGRIMAX RT 657	30	AGRIMAX SIRIO	26	RIDEMAX IT 697 (M+S)	62				
	600/65 R 30	AGRIMAX RT 657	30								
	420/70 R 30	AGRIMAX RT 765	35								
	480/70 R 30	AGRIMAX RT 765	35								
	440/80 R 30	RIDEMAX IT 696	61								
	480/80 R 30	RIDEMAX IT 696	61								
	380/85 R 30	AGRIMAX RT 855	42								
	420/85 R 30	AGRIMAX RT 855	42	RT 857	59						
	460/85 R 30	AGRIMAX RT 855	42	RT 857	59						
	600/70 R 30	AGRIMAX RT 765	35	AGRIMAX FORTIS	24						
	IF 600/70 R 30	AGRIMAX FORCE	22	AGRIMAX SIRIO	26						
620/75 R 30	AGRIMAX TERIS	100									
30.5	710/50 R 30.5	RIDEMAX FL 693 M	115								
	850/50 R 30.5	RIDEMAX FL 693 M	115								
	750/60 R 30.5	FL 630 SUPER	119	RIDEMAX FL 693 M	115						
	650/65 R 30.5	FL 630 SUPER	119								
32	1050/50 R 32	AGRIMAX RT 600	103	AGRIMAX TERIS	101						
	900/60 R 32	AGRIMAX TERIS	101								
	800/65 R 32	AGRIMAX RT 600	103	AGRIMAX TERIS	101						
	30.5L R 32	RIDEMAX FL 690	111								
	650/75 R 32	AGRIMAX TERIS	100								
	320/85 R 32	AGRIMAX RT 855	43								
	210/95 R 32	AGRIMAX RT 955	52								
	230/95 R 32	AGRIMAX RT 955	52								
270/95 R 32	AGRIMAX RT 955	52									
34	IF 710/60 R 34	AGRIMAX FORCE	22								
	540/65 R 34	AGRIMAX RT 657	30	AGRIMAX SIRIO	26						
	600/65 R 34	AGRIMAX RT 657	30								
	IF 650/65 R 34	AGRIMAX FORCE	22								
	480/70 R 34	AGRIMAX RT 765	36	AGRIMAX RT 765	36						
	520/70 R 34	AGRIMAX RT 765	36								
	600/70 R 34	AGRIMAX FORTIS	24								
	IF 600/70 R 34	AGRIMAX FORCE	22								
	IF 710/75 R 34	AGRIMAX FORCE	22								
	440/80 R 34	RIDEMAX IT 696	61								
	480/80 R 34	RIDEMAX IT 696	61								
	IF 580/80 R 34 CFO	AGRIMAX TERIS	102								
	320/85 R 34	AGRIMAX RT 855	43								
	380/85 R 34	AGRIMAX RT 855	43								
420/85 R 34	AGRIMAX RT 855	43									
460/85 R 34	AGRIMAX RT 855	43									

RIM DIAMETER (inches)	TIRE SIZE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE
36	320/85 R 36	AGRIMAX RT 855	43								
	340/85 R 36	AGRIMAX RT 855	44								
	230/95 R 36	AGRIMAX RT 955	51								
	270/95 R 36	AGRIMAX RT 955	51								
38	IF 900/60 R 38	AGRIMAX FORCE	22								
	540/65 R 38	AGRIMAX RT 657	31	AGRIMAX SIRIO	26						
	600/65 R 38	AGRIMAX RT 657	31								
	650/65 R 38	AGRIMAX RT 600	104	AGRIMAX RT 657	31						
	480/70 R 38	AGRIMAX RT 765	36								
	520/70 R 38	AGRIMAX RT 765	36								
	580/70 R 38	AGRIMAX RT 765	36								
	620/70 R 38	AGRIMAX RT 765	37								
	710/70 R 38	AGRIMAX RT 765	37	AGRIMAX SIRIO	26						
	800/70 R 38	AGRIMAX FORTIS	24								
	480/80 R 38	AGRIMAX RT 855	45	RT 853	57	RIDEMAX IT 696	61				
	320/85 R 38	AGRIMAX RT 855	44								
	340/85 R 38	AGRIMAX RT 855	44	AGRIMAX ELOS	55						
	380/85 R 38	AGRIMAX RT 855	44	AGRIMAX ELOS	55						
	VF 380/85 R 38	AGRIMAX SPARGO	48								
	420/85 R 38	AGRIMAX RT 855	44	AGRIMAX ELOS	55						
	460/85 R 38	AGRIMAX RT 855	44								
	520/85 R 38	AGRIMAX RT 855	45	RT 853	57						
	650/85 R 38	AGRIMAX FORTIS	24								
	IF 650/85 R 38	AGRIMAX FORCE	22								
270/95 R 38	AGRIMAX RT 955	52									
42	VF 710/60 R 42 NRO	AGRIMAX V - FLECTO	21								
	IF 900/60 R 42	AGRIMAX FORCE	23								
	650/65 R 42	RIDEMAX IT 697 (M+S)	62	AGRIMAX RT 657	31						
	620/70 R 42	AGRIMAX RT 765	38	AGRIMAX RT 765	38						
	710/70 R 42	AGRIMAX RT 765	38								
	IF 710/70 R 42	AGRIMAX FORCE	23								
	IF 800/70 R 42	AGRIMAX FORCE	23								
	710/75 R 42	AGRIMAX FORTIS	25								
	IF 710/75 R 42	AGRIMAX FORCE	23								
	480/80 R 42	AGRIMAX RT 855	45	AGRIMAX ELOS	56						
	300/85 R 42	AGRIMAX RT 955	52								
	520/85 R 42	AGRIMAX RT 855	45	AGRIMAX TERIS	102	AGRIMAX ELOS	56				
	IF 650/85 R 42	AGRIMAX FORCE	23								
	320/90 R 42	AGRIMAX RT 945	49								
230/95 R 42	AGRIMAX RT 955	52									
44	210/95 R 44	AGRIMAX RT 955	52								
	230/95 R 44	AGRIMAX RT 955	52								
	270/95 R 44	AGRIMAX RT 955	52								
46	620/70 R 46	AGRIMAX RT 765	38								
	420/80 R 46	AGRIMAX RT 855	46								
	480/80 R 46	AGRIMAX RT 855	46								
	340/85 R 46	AGRIMAX RT 955	53								
	520/85 R 46	AGRIMAX RT 855	46								
	320/90 R 46	AGRIMAX RT 945	49								
	380/90 R 46	AGRIMAX RT 945	49								
	VF 380/90 R 46	AGRIMAX SPARGO	48								
	270/95 R 46	AGRIMAX RT 955	53								
	300/95 R 46	AGRIMAX RT 955	53								
48	340/85 R 48	AGRIMAX RT 955	54								
	230/95 R 48	AGRIMAX RT 955	53								
	270/95 R 48	AGRIMAX RT 955	54								
50	480/80 R 50	AGRIMAX RT 855	47								
	320/90 R 50	AGRIMAX RT 945	49								
	380/90 R 50	AGRIMAX RT 945	49								
	VF 420/95 R 50	AGRIMAX SPARGO	48								
52	VF 380/105 R 50	AGRIMAX SPARGO	48								
	300/95 R 52	AGRIMAX RT 955	54								
54	320/90 R 54	AGRIMAX RT 945	50								
	380/90 R 54	AGRIMAX RT 945	50								
	270/95 R 54	AGRIMAX RT 955	54								

RIM DIAMETER (inches)	TIRE SIZE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE		
5	10 X 4.5 - 5	SM 48 (GK)	278	SM 54 (GK)	278	SM 68 (GK)	279						
	11 X 4.00 - 5	LG 306	238										
	11 X 6.00 - 5	SM 68 (GK)	279										
	11 X 7.10 - 5	SM 48 (GK)	279	SM 54 (GK)	278	SM 68 (GK)	279						
6	13 X 5.00 - 6	LG 306	238	LG RIB	245								
	15 X 6.00 - 6	LG 306	238	LG RIB	245								
	AT 145 X 70 - 6	AT 109	271										
7	AT 16 X 8 - 7	AT 109	271										
8	16 X 6.50 - 8	TR 315	247	LG 306	238	LG RIB	245						
	4.80 - 8	ST 180	258										
	18 X 8.50 - 8	LG 306	238	TR 317	248								
	AT 18 X 10 - 8	AT 111	273										
	18 X 7 - 8	TR 360	106/237										
	18 X 8.50 - 8	GF 304	249										
	AT 18 X 9.5 - 8	AT 109	271										
	18 X 9.50 - 8	LG 306	239										
	5.70 - 8	ST 180	258										
	AT 20 X 7 - 8	AT 109	271	AT 108	269	AT 110	272						
	20 X 10.00 - 8	LG 307	243	LG 306	239								
	AT 20 X 11 - 8	AT 111	273										
	AT 20 X 10 - 8	AT 112	268										
	AT 21 X 9 - 8	AT 109	271										
	AT 22 X 11 - 8	AT 111	273	AT 108	269	W 207	266	AT 109	271	AT 119	275		
9	AT 18 X 10 - 9	AT 111	273										
	AT 20 X 11 - 9	AT 111	273	AT 111 HD	275								
	6.00 - 9	ST 180	258	ST 195	265								
	AT 21 X 8 - 9	AT 110	272										
	AT 22 X 10 - 9	AT 108	269										
	AT 22 X 11 - 9	AT 108	269	AT 111	273	AT 111 HD	275	W 207	266				
	AT 25 X 12 - 9	AT 109	271	W 207	266	AT 108	269						
AT 25 X 13 - 9	AT 108	269	W 207	266									
10	AT 18 X 10 - 10	AT 111	273										
	18 X 8.50 - 10	LG 306	239										
	18 X 10.50 - 10	LG SMOOTH	237										
	205/50 - 10	GF 305 CLASSIC	249										
	AT 19 X 6 - 10	AT 111	273										
	AT 20 X 6 - 10	AT 111	273										
	20 X 8.00 - 10	LG 306	239										
	20 X 10.00 - 10	LG RIB	245	LG SMOOTH	237	LG 306	239						
	20 X 12.00 - 10	LG 307	243										
	AT 20 X 11 - 10	AT 111 HD	275	AT 111	237								
	AT 20 X 10 - 10	AT 112	268	AT 108	269								
	205/65 - 10	GF 305 FARM TRAILER	250										
	5.00 - 10	ST 180	258										
	AT 21 X 7 - 10	AT 110	272	AT 111 HD	275	AT 111	274						
	AT 22 X 7 - 10	AT 111	274	W 207	266	AT 111 HD	275						
	AT 22 X 8 - 10	AT 110	272	AT 108	269	W 207	266	AT 111	274				
	AT 22 X 11 - 10	AT 111	274	AT 111 HD	275	W 207	266	AT 108	269				
	AT 23 X 7 - 10	W 207	266	AT 110	272	AT 111	274	AT 111 HD	275				
	AT 23 X 8 - 10	W 207	266	AT 108	269								
	AT 23 X 10 - 10	AT 108	269	W 207	266								
AT 24 X 11 - 10	AT 108	270	W 207	266									
AT 25 X 11 - 10	W 207	266											
AT 25 X 12 - 10	W 207	266	AT 108	270									

RIM DIAMETER (inches)	TIRE SIZE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE						
11	AT 22 X 7 - 11	AT 108	270										
	AT 23 X 8 - 11	W 207	267	AT 108	270								
	AT 24 X 8 - 11	AT 108	270	W 207	267								
	AT 24 X 9 - 11	W 207	267	AT 108	270								
	AT 24 X 10 - 11	W 207	267	AT 108	270								
	AT 25 X 8 - 11	W 207	267										
	AT 25 X 10 - 11	W 207	267										
12	4.00 - 12	TF 9090	187										
	5.00-12	TR 128	64										
	23 X 8.50 - 12	TR 315	247	LG 306	240								
	5.00 - 12	TR 171	80										
	23 X 9.00 - 12	TR 318	95										
	AT 23 X 10 - 12	AT 112	268										
	23 X 10.50 - 12	LG 306	240	TR 315	247								
	6.5/80 - 12	AS 504	220										
	24 X 13.00 - 12	LG 408	244										
	24 X 12.00 - 12	LG 306	240	AT 316	99								
	AT 24 X 8 - 12	W 207	267										
	AT 25 X 8 - 12	AT 108	270	W 207	267								
	6.00 - 12	TR 128	64	TR 171	80								
	AT 25 X 10 - 12	W 207	267	AT 108	270								
	AT 25 X 11 - 12	W 207	267										
	26 X 12.00 - 12	LG 306	240	TR 319	248	TR 315	247						
	300/60 - 12	TRAC MASTER	246										
	AT 26 X 10 - 12	W 207	267										
	AT 26 X 12 - 12	W 207	267										
	AT 26 X 8 - 12	W 207	267										
	7.00 - 12	AW 702	197	AS 504	221								
	26.5 X 14.00 - 12	LG 408	244										
	26 X 10.00 - 12	TR 318	95										
	AT 27 X 10 - 12	W 207	268										
	AT 27 X 12 - 12	W 207	268										
	300/65 - 12	RIB 775	218										
11.0/65 - 12	AS 504	221											
AT 28 X 10 - 12	W 207	268											
10.0/80 - 12	AW 702	197	AW 909	209	RIB IMPLEMENT (A)	213							
13	ST 165/80 D 13	ST 180	258										
	ST 175/80 D 13	ST 180	258										
14	24 X 8.50 - 14	LG 306	240										
	ST 205/65 D 14	ST 180	259										
	5.20 - 14	STEER FARM	194										
	25 X 8.50 - 14	LG 306	240										
	6.00-14	TR 126	63										
	ST 195/75 D 14	ST 180	259										
	ST 205/75 D 14	ST 180	259										
	ST 215/75 D 14	ST 180	259										
	7.00-14	TR 126	63	TR 128	64								
	9.5L - 14 SL	I - 1	251										
	11L - 14 SL	I - 1	251										
AT 30 X 10 - 14	BOGMAX	276											
AT 32 X 10 - 14	BOGMAX	276											
14.5	200/60 - 14.5	RIB 774 (B)	216	SL 441	236								
	250/65 - 14.5	RIB 774 (B)	216										
	8 - 14.5	LT TR 182	265	MH TR 182	264								

RIM DIAMETER (inches)	TIRE SIZE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	
15	185/65 - 15	AS 507	232											
	ST 205/65 D 15	ST 180	259											
	5.00 - 15	TF 9090	187	TF 8181	184	AS 504	222							
	27 X 8.50 - 15	LG 306	241											
	6.5/80 - 15	AS 505	231											
	ST 205/75 D 15	ST 180	259											
	27 X 10.50 - 15	LG 306	241											
	6.70 - 15 SL	I - 1	251											
	ST 225/75 D 15	ST 180	259											
	7.60 - 15 SL	I - 1	251											
	29 X 12.50 - 15	TR 319	248											
	7.5L - 15	AS 504	222											
	9.5L - 15 SL	I - 1	251	PRO RIB F2M	192									
	9.5L - 15 FI	FARM HIGHWAY TOUGH	255											
	11L - 15 SL	I - 1	252	PRO RIB F2M	192									
	31 X 15.50 - 15	TR 313	246											
	11L - 15 FI	FARM HIGHWAY TOUGH	255											
	31 X 13.50 - 15	FLOTATION RIB IMPLEMENT	219											
	31 X 15.5 - 15	LG 306	241	TR 315	247	TRAC MASTER	246							
	11L - 15 SL	INDUSTRIAL RIB F3	250	POWER RIB F2	192									
12.5L - 15 FI	FARM HIGHWAY TOUGH	255												
12.5L - 15 SL	I - 1	252												
33 X 12.5 - 15	AT 621	165												
10.00 - 15 FI	FARM HIGHWAY TOUGH	255												
33 X 15.50 - 15	TRAC MASTER	246												
15.3	27 X 10 - 15.3	AS 504	177/224											
	260/70 - 15.3	FARM 2000	233	AW 09	211									
	10.0/75 - 15.3	AW 702	197	AW 909	209	MP 567	168	AS 504	175/223					
	11.5/80 - 15.3	AW 702	198	AW 909	209	AW 726	208	AS 504	176/224	MP 567	168			
	12.5/80 - 15.3	AW 702	199	AW 909	210									
	300/80 - 15.3	FARM 2000	233	AW 09	211									
	320/80 - 15.3	AW 09	211											
15.5	280/60 - 15.5	FLOTATION TR 678	146											
	400 - 15.5	F 240	152											
	400/60 - 15.5	AW 09	211	AW 726	208	TR 882	106	AW 708	205	RIB 900	218			
	18 - 15.5	F 240	152											
16	4.00 - 16	TF 8181	184	TF 9090	187									
	4.50 - 16	TF 8181	184											
	5.00 - 16	TF 8181	184											
	5.50 - 16	TF 9090	187	COMMANDER (F)	190	TF 8181	184							
	6.00 - 16	AW 702	200	AS 504	177/225	TF 9090	187	STEER FARM	194	COMMANDER 3 RIB	191	TF 8181	184	
		COMMANDER (F)	190	COMMANDER TWIN RIB	191									
	6.50 - 16	BK 4040	212	TF 9090	187	TF 8181	184	STEER FARM	194	COMMANDER (F)	190			
	7.00-16	TR 144	79	BK 4040	212									
	10.5/65 - 16	RIB 774 (B)	216	AW 702	200									
	9.0/70 - 16	AS 504	178/226											
	13.0/55 - 16	AW 702	200											
	8.00-16	TR 144	79											
	7.50 - 16 SL	I - 1	253											
	11L - 16 SL	I - 1	253											
	7.50 - 16	AS 504	178/225	STEER FARM	194	COMMANDER (F)	190	TF 9090	187	TF 9393	190	TF 8181	185	
	270/75 - 16	AS 504	178/226											
	250/80 - 16	FARM 2000	233											
	11L - 16 SL	INDUSTRIAL RIB F3	250											
	9.00 - 16 SL	I - 1	253											
	9.5 - 16	TR 171	80	TR 144	79									
12.5L - 16 SL	I - 1	253												
9.00 - 16	TF 9090	188	RIB F3	193	BK 823	256	AT 621	165						
12.5/70 - 16	AT 621	165												
14.0/65 - 16	AW 705	203												
10.00 - 16 SL	PRO RIB F2M	192												
13.0/75 - 16	AW 702	201												

RIM DIAMETER (inches)	TIRE SIZE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE		
16	10.00 - 16	TF 8181	185	TF 9090	188								
	11.00 - 16	MULTI RIB	220	TF 9090	188	TF 8181	185						
	11.00 - 16 SL	PRO RIB F2M	192										
	10.50 - 16	AW 702	200										
	13.6 - 16	LG 306	242										
16.1	14L - 16.1 SL	I - 1	254	PRO RIB F2M	192								
	16.5L - 16.1 SL	I - 1	254										
	19L - 16.1 SL	I - 1	254										
	21.5L - 16.1 SL	I - 1	254										
16.5	33 X 15.50 - 16.5	LG 306	242										
17	19.0/45 - 17	RIB 774 (C)	217										
	380/55 - 17	AW 09	211										
	15.0/55 - 17	AW 705	203	AW 909	215	RIB 774 (A)	215	AS 504	179/226				
	19.0/45 - 17	AS 504	226	AW 708	206								
	420/55 - 17	AS 504	226										
	500/50 - 17	AW 708	207	FLOTATION 648	128								
	500/65 - 17	AW 708	207										
	49 - 17	RIB IMPLEMENT (B)	213										
17.5	215/75 - 17.5	RIB 774 (C)	217	RIB MASTER	219								
	225/75 - 17.5	RIB 774 (C)	217										
18	8.00-18	FARM 2000	85/233	TR 144	79	TR 171	80						
	7.50 - 18	AS 504	227	TF 9090	188	TF 8181	185						
	250/80 - 18	FARM 2000	233										
	13.0/65 - 18	AW 702	202										
	9.5 - 18	TR 171	80	AT 171	276								
	12.0 - 18	RIB 774 (B)	216										
	10.5 - 18	MP 567	168	MP 600	174								
	10.5/80 - 18	AW 702	201	AS 504	227	AT 603	162						
	15.5/60 - 18	AT 621	167										
	12.5/80 - 18	AW 702	201	TR 461	98	AS 504	227	AT 603	163	AT 621	165		
	12.5 - 18	MP 570	171	MP 600	174	MP 567	168						
	340/80 - 18	CON STAR	161										
	15.0/70 - 18	AW 705	204	AT 621	167								
	14.5/80 - 18	AW 702	202										
19	4.00 - 19	TF 9090	189										
	6.00 - 19	TF 8181	185	TF 9090	189								
19.5	18 - 19.5	MP 567	169										
20	6.50 - 20	TF 8181	186	BK 308	263	MP 585	172	STEER FARM	194				
	8.3 - 20	TR 144	79	TR 171	80	FARM 2000	85/233	AT 171	276				
	7.50 - 20	AS 504	228	TF 8181	186	TF 9090	189						
	9.5 - 20	TR 171	80	TR 135	65	AT 171	276						
	8.00 - 20	TR 135	65										
	10.5 - 20	MP 585	172	MP 567	169								
	38 X 14.00 - 20	LG 306	242										
	11.2 - 20	TRAC FARM	89	TR 171	80	TR 135	65						
	12.5 - 20	MP 567	169	MP 570	171	MP 585	172						
	500/55 - 20	FLOTATION 648	129										
	340/80 - 20	CON STAR	161										
	42 X 17 - 20	AT 621	167										
	10.00 - 20	TR 135	65										
	12.4 - 20	TR 135	65										
	16.0/70 - 20	AW 705	204										
	380/75 - 20	CON STAR	161										
	400/70 - 20	CON STAR	161	MP 600	174	AT 621	167	TR 459	96				
	17.5/65 - 20	AT 621	167										
	16.0/70 - 20	AS 504	228										
	400/70 - 20	AS 504	228										
	42 X 25.00 - 20	FLOTATION 351	125										

RIM DIAMETER (inches)	TIRE SIZE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE
20	8.3 - 20	AT 171	276										
	9.5 - 20	AT 171	276										
	14.5 - 20	MP 567	170	MP 570	171								
	16.0/70 - 20	MP 567	170										
	44 X 18.00 - 20	LG 306	242										
	48 X 25.00 - 20	FLOTATION 351	125										
22	8.3 - 22	TR 171	81	AT 171	276								
	9.5 - 22	TR 144	79	TR 171	81	AT 171	276						
22.5	400/55 - 22.5	AW 705	204	FLOTATION 558	108								
	350/65 - 22.5	FLOTATION 648	129										
	500/45 - 22.5	FLOTATION 558	108										
	550/45 - 22.5	AS 509	232	FLOTATION TR 675	144	FLOTATION 648	133	FLOTATION 648 T	143				
	385/65 - 22.5	FLOTATION 648	129										
	400/60 - 22.5	FLOTATION 648	130										
	500/50 - 22.5	FLOTATION 648	131										
	600/40 - 22.5	FLOTATION TR 678	146										
	650/45 - 22.5	FLOTATION TR 678	146										
	600/50 - 22.5	FLOTATION 648	135										
	700/40 - 22.5	FLOTATION 648	136										
	500/60 - 22.5	FLOTATION 648	132	FLOTATION TR 675	144	FLOTATION TR 675	144						
	18 - 22.5	MP 590	173										
	600/55 - 22.5	FLOTATION 648	136	FLOTATION RIB 774	147								
550/60 - 22.5	FLOTATION 648	134	FLOTATION RIB 774	147	FLOTATION TR 675	145							
700/50 - 22.5	FLOTATION 648	137											
24	8.3 - 24	FARM 2000	85	TR 135	65	TR 171	81						
	9.5 - 24	TR 135	65	COMMANDER (R)	91	TR 171	81						
	11.2 - 24	TR 117	109	TR 135	66	TR 171	81						
	12.4 - 24	TR 135	66	TR 171	81	COMMANDER (R)	91						
	9.00 - 24 SL	I - 1	254										
	11.25 - 24 SL	I - 1	254										
	400/70 - 24	CON STAR	161	MP 600	174								
	13.6 - 24	TR 135	67	TR 171	82	TR 117	109						
	14.9 - 24	TR 459	96	TR 117	109	TR 391	263	TR 135	67	TR 118	110	TR 171	82
		TR 273	94										
	400/80 - 24	CON STAR	161	AS 504	230								
	460/70 - 24	CON STAR	161										
	17.5L - 24	AT 621	167	TR 459	96								
	15.5/80 - 24	AS 504	229										
	16.9 - 24	TR 461	98	TR 463	98	AT 621	167	TR 459	96	TR 135	67		
	500/70 - 24	CON STAR	161										
	19.5L - 24	AT 621	167	TR 461	98								
	440/80 - 24	CON STAR	161										
	16.5/85 - 24	AS 504	229										
	18.4 - 24	TR 459	96										
21L - 24	TR 459	96	TR 461	98									
25	66 X 43.00 - 25	FL 353	125	FL 354	126	FLOTATION 351	125						
26	11.2 - 26	TR 171	82										
	12.4 - 26	TR 171	82										
	13.6 - 26	TR 171	82										
	14.9 - 26	TR 135	67										
	16.9 - 26	TR 135	68										
	480/80 - 26	CON STAR	161										
	18.4 - 26	TR 459	97	AT 621	167	TR 387	260	TR 136	77	AS 2001	88	FS 216	149
		TR 387	260	TR 390	262	AGRI GRIP	255	TR 135	68	FS 216	149	TR 270	92
23.1 - 26	TR 273	94											
28L - 26	TR 390	262	FS 216	150									

RIM DIAMETER (inches)	TIRE SIZE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE
26.5	710/45 - 26.5	FORESTECH	148										
	600/55 - 26.5	FORESTECH	148	FLOTATION 648	138								
	700/50 - 26.5	FLOTATION 648	139										
	800/45 - 26.5	FLOTATION 648	139										
	750/55 - 26.5	FORESTECH	148										
28	8.3 - 28	TR 135	68										
	9.5 - 28	TR 135	68										
	11.2 - 28	TR 135	69										
	12.4 - 28	TR 387	261	TR 171	82	FARM 2000	85	TR 135	69	TR 136	77	COMMANDER (R)	91
		TRAC FARM	89	TRAC FARM PLUS	90								
	13.6 - 28	TR 171	82	FARM 2000	85	TR 135	69	COMMANDER (R)	91	TRAC FARM	89	TRAC FARM PLUS	90
	14.9 - 28	TR 171	83	TR 135	69	FARM 2000	86	COMMANDER (R)	91				
	16.9 - 28	TR 461	98	TR 387	261	TR 463	98	TR 459	97	AT 621	167	AS 2001	88
		FARM 2000	86	COMMANDER (R)	91	FARM 2000 PLUS	87	TRAC FARM	89	TRAC FARM PLUS	90	TR 171	83
	440/80 - 28	CON STAR	161										
	18.4 - 28	TR 459	97	TR 135	70								
21L - 28	TR 459	97											
30	7.2 - 30	TR 135	70										
	9.5 - 30	TR 135	70										
	14.9 - 30	TR 135	70	TR 171	83								
	16.9 - 30	TR 387	261	AT 621	167	TR 459	97	TRAC FARM PLUS	90	TR 135	70	TR 136	77
		TR 171	83										
	15 - 30	TR 135	70										
	18.4 - 30	TR 387	261	TR 135	70	TR 136	77	TRAC FARM	89	TR 171	83	FARM 2000	86
		TRAC FARM	89	FS 216	150	TR 270	92	COMMANDER (R)	91	TR 273	94		
23.1 - 30	TR 135	71	TR 270	92	TR 273	94							
30.5	650/65 - 30.5	FLOTATION 648	140										
	750/60 - 30.5	FLOTATION 648	141										
	850/50 - 30.5	FLOTATION 648	142										
32	8.3 - 32	TR 135	72										
	9.5 - 32	TR 135	72										
	12.4 - 32	TR 135	72	TR 171	84								
	11.00-32	PUDDLE SPECIAL	95										
	24.5 - 32	TR 387	261	TR 137	105	FS 216	150						
	DW 500/95 D 32	STAR TRAC	104										
	VA 500/95 D 32	STAR TRAC	104										
	30.5L - 32	FS 216	151	TR 137	105								
DH 35.5L - 32	FS 216	151											
34	16.9 - 34	TR 135	72	TR 171	84								
	700/55 - 34	TR 678	152										
	600/65 - 34	TR 678	152										
	18.4 - 34	TR 135	72	TR 171	84	FS 216	151	TR 270	92				
	23.1 - 34	TR 135	72	TR 270	92	TR 273	94						
36	8.3 - 36	TR 135	73										
	9.5 - 36	TR 135	73										
	12.4 - 36	TR 135	73	TR 171	84								
	13.6 - 36	TR 135	74	TR 171	84								
38	11.2 - 38	TR 117	110										
	12.4 - 38	TR 135	74										
	14.00 - 38	FARM SPECIAL	87	TR 135	75								
	13.6 - 38	TR 135	74	TR 133	64	TR 171	84	TR 270	93				
	15.5 - 38	TR 135	75										
	16.9 - 38	TR 135	75	TR 171	84								
	18.4 - 38	TR 135	75	TR 171	84	TR 270	93						
20.8 - 38	TR 270	93	TR 135	76									
42	9.5 - 42	TR 135	76										
	12.4 - 42	TR 135	76										
	20.8 - 42	TR 135	76										
46	13.6 - 46	TR 270	93										

BEFT



MAIN APPLICATION:
TRACTOR



AGRIMAX V-FLECTO

RADIAL 'VF' TECHNOLOGY TIRES

As a result of the recent evolution that high-powered tractors have seen in terms of both technology and performance, also tires are expected to meet this challenging demand. AGRIMAX V-FLECTO is BKT's response. This tire excels in both performance and reliability offering extraordinary resistance against highest stress levels as well as excellent speed levels even on paved roads. The advantages? More productivity and a significant reduction of operating costs - whatever the task.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)							
		Rec.	Alt.							↓							
											bar	0.6	0.8	1.0	1.2	1.4	1.6
30"	VF 600/60 R 30 NRO	158 D	DW20B	DW18L; DW21B	595	1485	649	4377	700	STD	km/h	2130	2475	2825	3170	3520	3870
											70	2130	2475	2825	3170	3520	3870
											from 10 to 65	2340	2720	3105	3485	3870	4250
											Dual Fitment	2060	2395	2735	3070	3405	3740
42"	VF 710/60 R 42 NRO	173 D	DW25B	DW23B; MW25B	710	1930	860	5724	925	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6
											km/h	3255	3875	4320	4850	5385	5915
											70	3255	3875	4320	4850	5385	5915
											from 10 to 65	3575	4160	4745	5330	5915	6500
Dual Fitment	3150	3660	4175	4690	5205	5720											

STD: Standard



MAIN APPLICATION:
TRACTOR



AGRIMAX FORCE (R-1W)

RADIAL IF TECHNOLOGY TIRES

AGRIMAX FORCE, the high-end product of BKT, is a radial tire specially designed for agriculture applications with high-power tractors, ensuring top performance and efficiency. AGRIMAX FORCE is a really comfortable tire for both field operations and road transfers; it actually allows to move without the need for increasing the inflation pressure.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)												
		Rec. 	Alt. 							↓												
28"	IF 600/70 R 28	164 D	DW 21 B	DW 20 B	603	1551	694	4654	725	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4			
											km/h											
											from 10 to 65	2350	2700	3100	3500	3900	4300	4650	5000			
30"	IF 600/70 R 30	165 D	DW 21 B; DW 21 A	DW 20 A; DW 20 B	603	1602	708	4767	750	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4			
											km/h											
											from 10 to 65	2425	2785	3195	3605	4020	4430	4790	5150			
30"	IF 710/60 R 30	168 D	DW 25 B	-	708	1614	714	4814	775	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4			
											km/h											
											from 10 to 65	2580	2970	3420	3810	4260	4650	5155	5600			
34"	IF 600/70 R 34	167 D	DW 21 B; DW 21 A	DW 20 A; DW 20 B	603	1704	757	5070	800	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4			
											km/h											
											from 10 to 65	2565	2945	3380	3815	4255	4690	5070	5450			
34"	IF 650/65 R 34	161 D	DW 23 B	-	650	1710	764	5078	825	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6					
											km/h											
											from 10 to 65	2590	3055	3470	3885	4255	4625					
34"	IF 710/60 R 34	170 D	DW 25 B	-	708	1716	763	5137	825	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4			
											km/h											
											from 10 to 65	2760	3180	3660	4080	4560	4980	5520	6000			
34"	IF 710/75 R 34	178 D	DW 25 B	-	716	1929	864	5750	925	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4			
											km/h											
											from 10 to 65	3525	4050	4650	5250	5850	6450	7050	7500			
38"	IF 650/85 R 38	179 D	DW 23 B	-	663	2071	927	6106	975	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4			
											km/h											
											from 10 to 65	3645	4185	4805	5425	6045	6665	7210	7750			
38"	IF 900/60 R 38	184 D	DW 30 A; DW 30 B	TW 31 B	916	2045	904	5995	975	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4			
											km/h											
											from 10 to 65	4140	4770	5490	6120	6840	7470	8280	9000			

STD: Standard



MAIN APPLICATION:
TRACTOR



AGRIMAX FORCE (R-1W)

RADIAL 'IF' TECHNOLOGY TIRES

AGRIMAX FORCE, the high-end product of BKT, is a radial tire specially designed for agriculture applications with high-power tractors, ensuring top performance and efficiency. AGRIMAX FORCE is a really comfortable tire for both field operations and road transfers; it actually allows to move without the need for increasing the inflation pressure.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)									
		Rec. 	Alt. 							↓									
42" IF 650/85 R 42	180 D	DW 21 B	DW 23 B; DW 20 B	650	2173	965	6400	1025	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	
										km/h									
										from 10 to 65	3760	4320	4960	5600	6240	6880	7440	8000	
IF 710/70 R 42	179 D	DW 25 B	DW 23 B	716	2061	919	6200	975	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	
										km/h									
										from 10 to 65	3565	4110	4730	5270	5890	6435	7130	7750	
IF 710/75 R 42	181 D	DW 25 B	-	716	2133	950	6350	1025	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	
										km/h									
										from 10 to 65	3880	4455	5115	5775	6435	7095	7675	8250	
IF 800/70 R 42	186 D	DW 27 B	-	794	2150	950	6400	1025	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	
										km/h									
										from 10 to 65	4465	5130	5890	6650	7410	8170	8835	9500	
IF 900/60 R 42	186 D	DW 30 B	TW 30 B	916	2147	950	6457	1025	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	
										km/h									
										from 10 to 65	4370	5035	5795	6460	7220	7885	8740	9500	

STD: Standard



MAIN APPLICATION:
TRACTOR



AGRIMAX FORTIS (R-1W)

RADIAL EXTRA LARGE TIRES

AGRIMAX FORTIS is your reliable partner for all preparation, planting and soil treatment operations. Designed to equip the latest, most modern and most powerful tractors, AGRIMAX FORTIS allows you to carry very high loads maximizing your business productivity.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)												
		Rec.	Alt.							↓												
											bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4			
30"	600/70 R 30	158 D/161 A8	DW 20 B	DW 18 L; W 18 L	611	1602	724	4810	750	STD	km/h	65	50	40	30	10 LT	10 HT					
											2040	2380	2680	2975	3275	3530	3910	4250				
											2145	2505	2815	3130	3440	3710	4110	4465				
											2220	2590	2915	3240	3565	3840	4255	4625				
											2350	2740	3085	3425	3770	4060	4500	4890				
											2735	3190	3590	3990	4390	4730	5240	5695				
											2350	2740	3085	3425	3770	4060	4500	4890				
											34"	600/70 R 34	160 D/163 A8	DW 18 L	DW 20 B; W 18 L	591	1704	761	5109	800	STD	bar
km/h	65	50	40	30	10 LT	10 HT																
2160	2520	2835	3150	3465	3735	4140	4500															
2270	2650	2980	3310	3640	3925	4350	4725															
2340	2730	3075	3415	3755	4050	4485	4875															
2485	2900	3265	3625	3985	4300	4765	5175															
2895	3380	3800	4225	4645	5005	5550	6030															
2485	2900	3265	3625	3985	4300	4765	5175															
34"	600/70 R 34	160 D/163 A8	DW 18 L	DW 20 B; W 18 L	591	1704	761	5109	800	SPL	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4			
											km/h	65	50	40	30	10 LT	10 HT					
											2160	2520	2835	3150	3465	3735	4140	4500				
											2270	2650	2980	3310	3640	3925	4350	4725				
											2340	2730	3075	3415	3755	4050	4485	4875				
											2485	2900	3265	3625	3985	4300	4765	5175				
											2895	3380	3800	4225	4645	5005	5550	6030				
											2485	2900	3265	3625	3985	4300	4765	5175				
38"	650/85 R 38	173 D/176 A8	DW 23 B	DW 21 B; DW 20 B	675	2071	935	6184	975	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4			
											km/h	65	50	40	30	10 LT	10 HT					
											3120	3640	4095	4550	5005	5395	5980	6500				
											3280	3825	4300	4780	5260	5665	6280	6825				
											3410	3980	4475	4970	5470	5895	6535	7100				
											3590	4190	4710	5235	5760	6205	6880	7475				
											4185	4880	5490	6100	6710	7230	8015	8710				
											3590	4190	4710	5235	5760	6205	6880	7475				
38"	800/70 R 38	178 D/181 A8	DW 25 B	DW 23 B; DW 27 B	798	2085	912	6202	975	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4			
											km/h	65	50	40	30	10 LT	10 HT					
											3600	4200	4725	5250	5775	6225	6900	7500				
											3780	4410	4965	5515	6065	6540	7245	7875				
											3960	4620	5200	5775	6355	6850	7590	8250				
											4140	4830	5435	6040	6645	7160	7935	8625				
											4825	5630	6335	7035	7740	8345	9250	10050				
											4140	4830	5435	6040	6645	7160	7935	8625				

STD: Standard
SPL: Special



MAIN APPLICATION:
TRACTOR



AGRIMAX FORTIS (R-1W)

RADIAL EXTRA LARGE TIRES

AGRIMAX FORTIS is your reliable partner for all preparation, planting and soil treatment operations. Designed to equip the latest, most modern and most powerful tractors, AGRIMAX FORTIS allows you to carry very high loads maximizing your business productivity.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)									
		Rec.	Alt.							↓									
											bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
42" 710/75 R 42	175 D/172 E	DW 23 B	DW 25 B	716	2133	970	6375	1025	STD	km/h	70	65	50	40	30	10 LT	10 HT		
										3025	3530	3970	4410	4855	5230	5800	6300		
										3315	3865	4350	4830	5315	5730	6350	6900		
										3480	4060	4565	5075	5580	6015	6670	7245		
										3630	4235	4765	5295	5825	6275	6960	7560		
										3810	4445	5000	5555	6110	6590	7305	7935		
										4440	5180	5830	6475	7125	7680	8510	9250		
										3810	4445	5000	5555	6110	6590	7305	7935		
710/75 R 42	175 D/172 E	DW 23 B	DW 25 B	716	2133	970	6375	1025	SPL	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	
										km/h	70	65	50	40	30	10 LT	10 HT		
										3025	3530	3970	4410	4855	5230	5800	6300		
										3315	3865	4350	4830	5315	5730	6350	6900		
										3480	4060	4565	5075	5580	6015	6670	7245		
										3630	4235	4765	5295	5825	6275	6960	7560		
										3810	4445	5000	5555	6110	6590	7305	7935		
										4440	5180	5830	6475	7125	7680	8510	9250		
										3810	4445	5000	5555	6110	6590	7305	7935		

STD: Standard
SPL: Special



MAIN APPLICATION:
TRACTOR



AGRIMAX SIRIO (R-1W)

FAST SPEED RADIAL TIRES

AGRIMAX SIRIO is the new high-speed tire (up to 70 km/h) developed by BKT for high-performance tractors. It has been designed to provide best performance both on the road and in the field. The high sidewall flexibility ensures outstanding comfort to improve the driving experience.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)									
		Rec. 	Alt. 							↓ 									
30"	540/65 R 30	150 D/147 E	W 16 L	W 18	530	1464	669	4400	700	HS	LOAD CAPACITY (KG/TIRE)								
											bar								
											km/h	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
											70	1450	1665	1910	2155	2400	2645	2860	3075
											65	1575	1810	2080	2345	2615	2885	3120	3350
											50	1655	1905	2185	2465	3750	3030	3275	3520
											40	1725	1985	2280	2570	2865	3160	3415	3670
											25	1870	2145	2465	2780	3100	3415	3695	3970
											10	2365	2715	3120	3520	3920	4325	4675	5025
											IF 600/70 R 30	165 D/162 E	DW 21 B	DW 20 B	603	1602	713	4739	750
bar																			
km/h	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4											
70	2235	2565	2945	3325	3705	4085	4420	4750											
65	2425	2785	3195	3605	4020	4430	4790	5150											
50	2425	2785	3195	3605	4020	4430	4790	5150											
40	2425	2785	3195	3605	4020	4430	4790	5150											
25	2425	2785	3195	3605	4020	4430	4790	5150											
10	2425	2785	3195	3605	4020	4430	4790	5150											
34"	540/65 R 34	152 D/149 E	W 16 L	W 18	530	1566	721	4735	750	HS									
											bar								
											km/h	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
											70	1530	1755	2015	2275	2535	2795	3025	3250
											65	1670	1920	2205	2485	2770	3055	3305	3550
											50	1755	2015	2315	2615	2910	3210	3470	3730
											40	1830	2105	2415	2725	3035	3350	3620	3890
											25	1980	2275	2615	2950	3285	3625	3920	4210
											10	2505	2880	3305	3730	4155	4580	4955	5325
											38"	540/65 R 38	153 D/150 E	W 16 L	W 18 L	530	1667	769	5050
bar																			
km/h	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4											
70	1575	1810	2080	2345	2615	2885	3120	3350											
65	1720	1975	2265	2555	2850	3140	3395	3650											
50	1805	2075	2380	2685	2995	3300	3570	3835											
40	1880	2160	2480	2800	3120	3440	3720	4000											
25	2040	2340	2685	3035	3380	3725	4030	4330											
10	2575	2960	3395	3835	4275	4710	5095	5475											
710/70 R 38	171 D/168 E	DW 23 B	-	716	1959	887	5917	925	HS	LOAD CAPACITY (KG/TIRE)									
										bar									
										km/h	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	
										70	2635	3025	3475	3920	4370	4820	5210	5600	
										65	2895	3325	3815	4305	4800	5290	5720	6150	
										50	3040	3490	4010	4525	5040	5560	6010	6460	
										40	3170	3640	4180	4715	5255	5795	6265	6735	
										25	3430	3940	4520	5105	5690	6270	6780	7290	
										10	4340	4985	5720	6460	7200	7935	8580	9225	

HS: High Speed



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 657 (R-1W)

RADIAL TRACTOR TIRES

AGRIMAX RT 657 is ideal for soil tillage and on-the-road usage; some sizes are also suitable for vineyard harvesting. This tire guarantees an excellent driving comfort as well as significant fuel savings. AGRIMAX RT 657 is the best choice for those who need a versatile and reliable tire, with no compromise on performance.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)																								
		Rec.	Alt.							↓																								
											bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4															
16" 320/65 R 16	117 D/120 A8	W 10	W 9; W 11	319	822	366	2466	390	STD	km/h	65	50	40	30	10 LT	10 HT	605	710	810	900	990	1070	1185	1285										
										605	710	810	900	990	1070	1185	1285																	
										635	745	855	945	1040	1125	1245	1350																	
										660	770	885	980	1080	1165	1290	1400																	
										700	815	935	1040	1140	1230	1365	1480																	
										815	950	1090	1210	1330	1435	1590	1725																	
										700	815	935	1040	1140	1230	1365	1480																	
18" 320/65 R 18	109 A8/B	W 10	W 9; W 11	319	873	392	2587	410	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6																		
										km/h	600	695	785	870	950	1030																		
										600	695	785	870	950	1030																			
										645	745	840	930	1020	1105																			
										805	930	1055	1165	1275	1385																			
										645	745	840	930	1020	1105																			
340/65 R 18	113 A8/B	W 11	W 10; W 12	343	899	400	2667	425	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6																		
										km/h	645	760	865	970	1060	1150																		
										645	760	865	970	1060	1150																			
										695	820	930	1040	1140	1235																			
										870	1020	1160	1300	1425	1545																			
										695	820	930	1040	1140	1235																			
20" 340/65 R 20	124 D/127 A8	W 11	W 10; W 12	343	950	430	2892	450	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4																
										km/h	755	880	1010	1120	1235	1330	1475	1600																
										790	925	1060	1180	1295	1395	1550	1680																	
										825	965	1105	1225	1350	1455	1610	1750																	
										865	1015	1160	1290	1420	1530	1695	1840																	
										1010	1180	1355	1505	1655	1785	1975	2145																	
										865	1015	1160	1290	1420	1530	1695	1840																	
420/65 R 20	135 D/138 A8	W 13	W 11; W 12	418	1054	468	3162	500	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4																
										km/h	1025	1200	1375	1530	1680	1810	2010	2180																
										1080	1260	1445	1605	1765	1905	2110	2290																	
										1110	1300	1490	1655	1820	1960	2175	2360																	
										1180	1385	1585	1760	1935	2085	2310	2510																	
										1375	1610	1845	2050	2255	2430	2695	2925																	
										1180	1385	1585	1760	1935	2085	2310	2510																	

STD: Standard



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 657 (R-1W)

RADIAL TRACTOR TIRES

AGRIMAX RT 657 is ideal for soil tillage and on-the-road usage; some sizes are also suitable for vineyard harvesting. This tire guarantees an excellent driving comfort as well as significant fuel savings. AGRIMAX RT 657 is the best choice for those who need a versatile and reliable tire, with no compromise on performance.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)									
		Rec. 	Alt. 							↓ 									
20" 440/65 R 20	138 D/141 A8	W 14 L	W 13; W 15 L	441	1080	479	3240	525	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	
										km/h	65	50	40	30	10 LT	10 HT			
										1110	1300	1490	1655	1820	1960	2175	2360		
										1170	1365	1565	1740	1910	2060	2285	2480		
										1215	1420	1625	1805	1985	2140	2370	2575		
										1280	1495	1715	1905	2095	2255	2500	2715		
										1490	1745	1995	2220	2440	2630	2915	3165		
										1280	1495	1715	1905	2095	2255	2500	2715		
24" 420/65 R 24	138 D/141 A8	W 13	W 11; W 12	418	1156	519	3468	550	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	
										km/h	65	50	40	30	10 LT	10 HT			
										1110	1300	1490	1655	1820	1960	2175	2360		
										1170	1365	1565	1740	1910	2060	2285	2480		
										1215	1420	1625	1805	1985	2140	2370	2575		
										1280	1495	1715	1905	2095	2255	2500	2715		
										1490	1745	1995	2220	2440	2630	2915	3165		
										1280	1495	1715	1905	2095	2255	2500	2715		
440/65 R 24	135 D/138 A8	W 14 L	W 13; W 15 L	441	1182	538	3546	575	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	
										km/h	65	50	40	30	10 LT	10 HT			
										1050	1225	1375	1530	1680	1810	2010	2180		
										1100	1285	1445	1605	1765	1905	2110	2290		
										1135	1325	1490	1655	1820	1960	2175	2360		
										1205	1410	1585	1760	1935	2085	2310	2510		
										1405	1640	1845	2050	2255	2430	2695	2925		
										1205	1410	1585	1760	1935	2085	2310	2510		
480/65 R 24	140 D/143 A8	W 15 L	W 14 L	479	1234	562	3730	600	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	
										km/h	65	50	40	30	10 LT	10 HT			
										1200	1400	1575	1750	1925	2075	2300	2500		
										1260	1470	1655	1840	2025	2180	2415	2625		
										1310	1530	1720	1910	2100	2265	2510	2725		
										1380	1610	1815	2015	2215	2390	2645	2875		
										1610	1880	2115	2345	2580	2785	3085	3350		
										1380	1610	1815	2015	2215	2390	2645	2875		
540/65 R 24	146 D/149 A8	W 16 L	W 18 L	530	1312	590	3930	625	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	
										km/h	65	50	40	30	10 LT	10 HT			
										1440	1680	1890	2100	2310	2490	2760	3000		
										1515	1765	1985	2205	2430	2615	2900	3150		
										1560	1820	2050	2275	2505	2700	2990	3250		
										1660	1935	2175	2415	2660	2865	3175	3450		
										1930	2255	2535	2815	3100	3340	3700	4020		
										1660	1935	2175	2415	2660	2865	3175	3450		

STD: Standard



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 657 (R-1W)

RADIAL TRACTOR TIRES

AGRIMAX RT 657 is ideal for soil tillage and on-the-road usage; some sizes are also suitable for vineyard harvesting. This tire guarantees an excellent driving comfort as well as significant fuel savings. AGRIMAX RT 657 is the best choice for those who need a versatile and reliable tire, with no compromise on performance.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)														
		Rec.	Alt.							↓														
											bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4					
28" 420/65 R 28	135 D/138 A8	W 13	W 12; W 11	418	1257	584	3824	600	STD	km/h	65	50	40	25	10	1025	1180	1355	1530	1705	1875	2030	2180	
										65	1080	1240	1420	1605	1790	1970	2130	2290						
										40	1110	1275	1465	1655	1845	2030	2195	2360						
										25	1215	1400	1605	1810	2020	2225	2405	2585						
										10	1540	1770	2030	2290	2555	2815	3045	3270						
										bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4						
										km/h	65	50	40	30	10 LT	10 HT	1135	1325	1490	1655	1820	1960	2175	2360
440/65 R 28	138 D/141 A8	W 14 L	W 13; W 15 L	441	1283	590	3878	625	STD	km/h	65	50	40	30	10 LT	10 HT	1195	1390	1565	1740	1910	2060	2285	2480
										65	1240	1445	1625	1805	1985	2140	2370	2575						
										40	1305	1525	1715	1905	2095	2255	2500	2715						
										10 LT	1520	1775	1995	2220	2440	2630	2915	3165						
										10 HT	1305	1525	1715	1905	2095	2255	2500	2715						
										bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4						
										km/h	65	50	40	30	10 LT	10 HT	1275	1485	1670	1855	2045	2200	2440	2650
480/65 R 28	142 D/145 A8	W 15 L	W 14 L	479	1335	610	4058	650	STD	km/h	65	50	40	30	10 LT	10 HT	1340	1560	1755	1950	2145	2315	2565	2785
										65	1395	1625	1830	2030	2235	2410	2670	2900						
										40	1465	1710	1925	2135	2350	2535	2810	3050						
										10 LT	1710	1995	2240	2490	2740	2955	3275	3555						
										10 HT	1465	1710	1925	2135	2350	2535	2810	3050						
										bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4						
										km/h	65	50	40	30	10 LT	10 HT	1560	1820	2050	2275	2505	2700	2990	3250
540/65 R 28	149 D/152 A8	W 16 L	W 18 L	530	1413	643	4253	675	STD	km/h	65	50	40	30	10 LT	10 HT	1640	1915	2155	2395	2630	2835	3145	3415
										65	1705	1990	2240	2485	2735	2950	3270	3550						
										40	1800	2095	2360	2620	2880	3105	3445	3740						
										10 LT	2095	2440	2745	3050	3355	3615	4010	4355						
										10 HT	1800	2095	2360	2620	2880	3105	3445	3740						
										bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4						
										km/h	65	50	40	30	10 LT	10 HT	1800	2100	2365	2625	2890	3115	3450	3750
600/65 R 28	154 D/157 A8	DW 20 B	W 18 L	611	1491	670	4470	700	STD	km/h	65	50	40	30	10 LT	10 HT	1895	2210	2485	2760	3035	3275	3625	3940
										65	1980	2310	2600	2890	3180	3425	3795	4125						
										40	2075	2420	2720	3025	3325	3585	3970	4315						
										10 LT	2415	2815	3170	3520	3870	4175	4625	5025						
										10 HT	2075	2420	2720	3025	3325	3585	3970	4315						
										bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4						
										km/h	65	50	40	30	10 LT	10 HT	2075	2420	2720	3025	3325	3585	3970	4315

STD: Standard



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 657 (R-1W)

RADIAL TRACTOR TIRES

AGRIMAX RT 657 is ideal for soil tillage and on-the-road usage; some sizes are also suitable for vineyard harvesting. This tire guarantees an excellent driving comfort as well as significant fuel savings. AGRIMAX RT 657 is the best choice for those who need a versatile and reliable tire, with no compromise on performance.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)														
		Rec.	Alt.							↓														
											bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4					
30" 420/65 R 30	136 D/139 A8	W 13	W 12; W 11	418	1308	606	3952	625	STD	km/h	65	50	40	25	10	1055	1210	1390	1570	1750	1930	2085	2240	
										65	1110	1275	1465	1650	1840	2030	2195	2355						
										50	1145	1315	1510	1705	1900	2090	2260	2430						
										40	1250	1435	1650	1860	2075	2285	2470	2655						
										25	1580	1815	2085	2355	2625	2890	3125	3360						
										10														
										bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4						
540/65 R 30	150 D/153 A8	W 16 L	W 18 L	530	1464	670	4403	700	STD	km/h	65	50	40	30	10 LT	10 HT	1610	1880	2115	2345	2580	2785	3085	3350
										65	1690	1975	2220	2465	2715	2925	3240	3520						
										50	1755	2045	2300	2555	2815	3030	3360	3650						
										40	1855	2160	2430	2700	2970	3200	3550	3855						
										30	2160	2515	2830	3145	3460	3730	4135	4490						
										10 LT	1855	2160	2430	2700	2970	3200	3550	3855						
										10 HT														
bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4																
600/65 R 30	155 D/158 A8	DW 20 B	W 18 L	611	1542	697	4609	725	STD	km/h	65	50	40	30	10 LT	10 HT	1860	2170	2445	2715	2985	3220	3565	3875
										65	1955	2280	2565	2850	3135	3380	3745	4070						
										50	2040	2380	2680	2975	3275	3530	3910	4250						
										40	2145	2500	2810	3125	3435	3705	4105	4460						
										30	2495	2910	3275	3640	4005	4315	4780	5195						
										10 LT	2145	2500	2810	3125	3435	3705	4105	4460						
										10 HT														
bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4																
34" 540/65 R 34	152 D/155 A8	W 16 L	W 18 L	530	1566	712	4742	750	STD	km/h	65	50	40	30	10 LT	10 HT	1705	1990	2240	2485	2735	2950	3270	3550
										65	1795	2090	2350	2615	2875	3100	3435	3730						
										50	1860	2170	2445	2715	2985	3220	3565	3875						
										40	1965	2290	2575	2860	3150	3395	3760	4085						
										30	2285	2670	3000	3335	3670	3955	4380	4760						
										10 LT	1965	2290	2575	2860	3150	3395	3760	4085						
										10 HT														
bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4																
600/65 R 34	157 D/160 A8	DW 20 B	W 18 L	611	1644	742	4960	775	STD	km/h	65	50	40	30	10 LT	10 HT	1980	2310	2600	2890	3180	3425	3795	4125
										65	2085	2430	2735	3035	3340	3600	3990	4335						
										50	2160	2520	2835	3150	3465	3735	4140	4500						
										40	2280	2660	2990	3325	3655	3940	4370	4745						
										30	2655	3100	3485	3875	4260	4590	5090	5530						
										10 LT	2280	2660	2990	3325	3655	3940	4370	4745						
										10 HT														
bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4																

STD: Standard



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 657 (R-1W)

RADIAL TRACTOR TIRES

AGRIMAX RT 657 is ideal for soil tillage and on-the-road usage; some sizes are also suitable for vineyard harvesting. This tire guarantees an excellent driving comfort as well as significant fuel savings. AGRIMAX RT 657 is the best choice for those who need a versatile and reliable tire, with no compromise on performance.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)																					
		Rec.	Alt.																												
38"	540/65 R 38	153 D/156 A8	W 16 L	W 18 L	530	1667	760	5059	800	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4												
											km/h	65	1755	2045	2300	2555	2815	3030	3360	3650											
											50	1845	2150	2420	2685	2955	3185	3530	3835												
											40	1920	2240	2520	2800	3080	3320	3680	4000												
											30	2020	2355	2650	2940	3235	3490	3865	4200												
											10 LT	2350	2745	3085	3430	3770	4065	4505	4895												
											10 HT	2020	2355	2650	2940	3235	3490	3865	4200												
											42"	600/65 R 38	159 D/162 A8	DW 20 B	W 18 L	611	1745	790	5247	825	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	
																						km/h	65	2100	2450	2760	3065	3370	3635	4025	4375
																						50	2210	2575	2895	3220	3540	3815	4230	4595	
40	2280	2660	2995	3325	3660	3945	4370	4750																							
30	2420	2820	3175	3525	3880	4180	4635	5035																							
10 LT	2820	3285	3695	4110	4520	4870	5400	5865																							
10 HT	2420	2820	3175	3525	3880	4180	4635	5035																							
42"	650/65 R 38	163 D/166 A8	DW 20 B	-	645	1811	830	5483	875	STD												bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	
																						km/h	65	2340	2730	3075	3415	3755	4050	4485	4875
																						50	2460	2870	3230	3585	3945	4250	4715	5120	
											40	2545	2970	3340	3710	4085	4400	4880	5300												
											30	2695	3145	3535	3930	4320	4660	5165	5610												
											10 LT	3140	3660	4120	4575	5035	5425	6015	6535												
											10 HT	2695	3145	3535	3930	4320	4660	5165	5610												
											42"	650/65 R 42	165 D/168 A8	DW 20 B	-	645	1913	878	5824	925	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	
																						km/h	65	2475	2885	3245	3605	3970	4275	4740	5150
																						50	2600	3030	3410	3790	4170	4495	4980	5410	
40	2690	3140	3530	3920	4315	4650	5155	5600																							
30	2845	3320	3735	4150	4565	4920	5455	5925																							
10 LT	3315	3870	4355	4835	5320	5735	6355	6905																							
10 HT	2845	3320	3735	4150	4565	4920	5455	5925																							

STD: Standard



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 765 (R-1W)

RADIAL TRACTOR TIRES

AGRIMAX RT 765, a BKT 70 series tire, is suitable for cutting-edge tractors for several heavy-duty applications such as soil tillage, field and road transport, vineyard harvesting, and spraying. A wide contact patch ensures the best possible traction on all surfaces at any time.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)																			
		Rec.	Alt.							↓																			
											bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4										
16" 200/70 R 16	94 A8/B	W 6	-	197	686	313	2058	330	STD	km/h	315	365	420	470	525	580	625	670											
										50	315	365	420	470	525	580	625	670											
										40	340	390	450	505	565	620	670	720											
										10 LT	425	490	560	630	705	775	840	900											
										10 HT	340	390	450	505	565	620	670	720											
																					bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
																					km/h	365	420	485	545	605	670	725	775
220/70 R 16	99 A8/B	W7	-	221	715	324	2145	340	STD	km/h	365	420	485	545	605	670	725	775											
										50	365	420	485	545	605	670	725	775											
										40	395	450	515	585	650	715	775	830											
										10 LT	490	656	645	730	815	895	970	1040											
										10 HT	395	450	515	585	650	715	775	830											
																					bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
																					km/h	425	490	560	630	705	775	840	900
240/70 R 16	104 A8/B	W 8	W 8 L; W 9 L	244	742	335	2226	350	STD	km/h	425	490	560	630	705	775	840	900											
										50	425	490	560	630	705	775	840	900											
										40	455	525	600	680	755	830	900	965											
										10 LT	570	655	755	850	945	1045	1130	1210											
										10 HT	455	525	600	680	755	830	900	965											
																					bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
																					km/h	485	560	640	725	805	890	960	1030
260/70 R 16	109 A8/B	W 8	W 8 L; W 9 L	258	770	346	2310	360	STD	km/h	485	560	640	725	805	890	960	1030											
										50	485	560	640	725	805	890	960	1030											
										40	520	600	690	775	865	955	1030	1105											
										10 LT	650	750	860	970	1080	1190	1285	1380											
										10 HT	520	600	690	775	865	955	1030	1105											
																					bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
																					km/h	530	605	695	785	875	965	1045	1120
18" 280/70 R 18	112 A8/B	W 9	W 8; W 8 L; W 10	282	798	356	2370	390	STD	km/h	530	605	695	785	875	965	1045	1120											
										50	530	605	695	785	875	965	1045	1120											
										40	565	650	745	840	940	1035	1120	1200											
										10 LT	710	815	935	1055	1175	1295	1400	1505											
										10 HT	565	650	745	840	940	1035	1120	1200											
																					bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
																					km/h	555	640	735	830	925	1015	1100	1180
280/70 R 18	114 A8/B	W 9	W 8; W 10	282	849	381	2520	410	STD	km/h	555	640	735	830	925	1015	1100	1180											
										50	555	640	735	830	925	1015	1100	1180											
										40	595	685	785	890	990	1090	1180	1265											
										10 LT	745	860	985	1110	1240	1365	1475	1585											
										10 HT	595	685	785	890	990	1090	1180	1265											

STD: Standard



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 765 (R-1W)

RADIAL TRACTOR TIRES

AGRIMAX RT 765, a BKT 70 series tire, is suitable for cutting-edge tractors for several heavy-duty applications such as soil tillage, field and road transport, vineyard harvesting, and spraying. A wide contact patch ensures the best possible traction on all surfaces at any time.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)															
		Rec.	Alt.							↓															
											bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4						
20" 260/70 R 20	113 A8/B	W 8	9; W 9	258	872	402	2639	410	STD	km/h	50	40	30	10 LT	10 HT	545	625	715	805	900	990	1070	1150		
										50	40	30	10 LT	10 HT	545	625	715	805	900	990	1070	1150			
										30	10 LT	10 HT	585	670	770	865	965	1065	1150	1235					
										10 LT	10 HT	730	835	960	1085	1210	1330	1440	1545						
										10 HT		585	670	770	865	965	1065	1150	1235						
280/70 R 20	116 A8/B	W 9	W 10	282	900	408	2705	450	STD	km/h	50	40	30	10 LT	10 HT	590	675	775	875	975	1075	1165	1250		
										50	40	30	10 LT	10 HT	590	675	775	875	975	1075	1165	1250			
										30	10 LT	10 HT	630	725	835	940	1050	1155	1250	1340					
										10 LT	10 HT	790	905	1040	1175	1310	1445	1560	1675						
										10 HT		630	725	835	940	1050	1155	1250	1340						
300/70 R 20	120 A8/B	W 9	W 10	295	952	428	2854	450	STD	km/h	50	40	30	10 LT	10 HT	660	760	870	980	1095	1205	1305	1400		
										50	40	30	10 LT	10 HT	660	760	870	980	1095	1205	1305	1400			
										30	10 LT	10 HT	705	810	930	1050	1170	1290	1395	1500					
										10 LT	10 HT	885	1020	1170	1320	1470	1620	1750	1880						
										10 HT		705	810	930	1050	1170	1290	1395	1500						
320/70 R 20	123 A8/B	W 10	W 9; W 11	319	982	445	2965	475	STD	km/h	50	40	30	10 LT	10 HT	730	840	965	1085	1210	1335	1445	1550		
										50	40	30	10 LT	10 HT	730	840	965	1085	1210	1335	1445	1550			
										30	10 LT	10 HT	785	900	1030	1165	1295	1430	1545	1660					
										10 LT	10 HT	980	1125	1290	1460	1625	1790	1935	2080						
										10 HT		785	900	1030	1165	1295	1430	1545	1660						
360/70 R 20	129 A8/B	W 11	W 10; W 12	357	1042	469	3122	500	STD	km/h	50	40	30	10 LT	10 HT	870	1000	1150	1295	1445	1595	1725	1850		
										50	40	30	10 LT	10 HT	870	1000	1150	1295	1445	1595	1725	1850			
										30	10 LT	10 HT	935	1070	1230	1390	1545	1705	1845	1980					
										10 LT	10 HT	1170	1340	1540	1740	1935	2135	2310	2480						
										10 HT		935	1070	1230	1390	1545	1705	1845	1980						
380/70 R 20	132 A8/B	W 12	W 11; W 13	380	1082	482	3213	525	STD	km/h	50	40	30	10 LT	10 HT	940	1080	1240	1400	1560	1720	1860	2000		
										50	40	30	10 LT	10 HT	940	1080	1240	1400	1560	1720	1860	2000			
										30	10 LT	10 HT	1010	1160	1330	1500	1670	1845	1995	2140					
										10 LT	10 HT	1260	1450	1665	1880	2095	2305	2495	2680						
										10 HT		1010	1160	1330	1500	1670	1845	1995	2140						

STD: Standard



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 765 (R-1W)

RADIAL TRACTOR TIRES

AGRIMAX RT 765, a BKT 70 series tire, is suitable for cutting-edge tractors for several heavy-duty applications such as soil tillage, field and road transport, vineyard harvesting, and spraying. A wide contact patch ensures the best possible traction on all surfaces at any time.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)							
		Rec.	Alt.							↓							
											bar	0.6	0.8	1.0	1.2	1.4	1.6
24" 320/70 R 24	116 A8/B	W 10	W 9; W 11	319	1094	502	3245	525	STD	km/h	690	800	915	1025	1140	1250	
										50	690	800	915	1025	1140	1250	
										40	740	860	980	1100	1220	1340	
										30	925	1075	1225	1375	1525	1675	
										10 LT	740	860	980	1100	1220	1340	
										10 HT	740	860	980	1100	1220	1340	
										bar	0.6	0.8	1.0	1.2	1.4	1.6	
360/70 R 24	122 A8/B	W 11	W 10; W 12	357	1152	519	3400	550	STD	km/h	825	960	1095	1230	1365	1500	
										50	825	960	1095	1230	1365	1500	
										40	885	1030	1175	1320	1465	1605	
										30	1110	1290	1470	1650	1830	2010	
										10 LT	885	1030	1175	1320	1465	1605	
										10 HT	885	1030	1175	1320	1465	1605	
										bar	0.6	0.8	1.0	1.2	1.4	1.6	
380/70 R 24	125 A8/B	W 12	W 11; W 13	380	1190	538	3560	575	STD	km/h	910	1060	1205	1355	1505	1650	
										50	910	1060	1205	1355	1505	1650	
										40	975	1135	1295	1455	1615	1770	
										30	1220	1420	1620	1820	2020	2215	
										10 LT	975	1135	1295	1455	1615	1770	
										10 HT	975	1135	1295	1455	1615	1770	
										bar	0.6	0.8	1.0	1.2	1.4	1.6	
420/70 R 24	130 A8/B	W 13	W 12; W 14 L	418	1248	554	3680	600	STD	km/h	1045	1220	1390	1560	1730	1900	
										50	1045	1220	1390	1560	1730	1900	
										40	1120	1305	1490	1670	1855	2035	
										30	1405	1635	1865	2095	2325	2550	
										10 LT	1120	1305	1490	1670	1855	2035	
										10 HT	1120	1305	1490	1670	1855	2035	
										bar	0.6	0.8	1.0	1.2	1.4	1.6	
480/70 R 24	138 A8/B	W 15 L	W 14 L; W 16 L	479	1316	580	3894	625	STD	km/h	1300	1515	1725	1940	2150	2360	
										50	1300	1515	1725	1940	2150	2360	
										40	1390	1620	1845	2075	2300	2525	
										30	1740	2025	2310	2595	2880	3165	
										10 LT	1390	1620	1845	2075	2300	2525	
										10 HT	1390	1620	1845	2075	2300	2525	
										bar	0.6	0.8	1.0	1.2	1.4	1.6	
28" 360/70 R 28	125 A8/B	W 11	W 10; W 12	357	1251	579	3767	600	STD	km/h	910	1060	1205	1355	1505	1650	
										50	910	1060	1205	1355	1505	1650	
										40	975	1135	1295	1455	1615	1770	
										30	1220	1420	1620	1820	2020	2215	
										10 LT	975	1135	1295	1455	1615	1770	
										10 HT	975	1135	1295	1455	1615	1770	
										bar	0.6	0.8	1.0	1.2	1.4	1.6	

STD: Standard



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 765 (R-1W)

RADIAL TRACTOR TIRES

AGRIMAX RT 765, a BKT 70 series tire, is suitable for cutting-edge tractors for several heavy-duty applications such as soil tillage, field and road transport, vineyard harvesting, and spraying. A wide contact patch ensures the best possible traction on all surfaces at any time.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)							
		Rec.	Alt.							↓							
											bar	0.6	0.8	1.0	1.2	1.4	1.6
28"	380/70 R 28	127 A8/B	W 12	W 11; W 13	380	1293	586	3883	625	STD	km/h	965	1120	1280	1435	1595	1750
											50	965	1120	1280	1435	1595	1750
											40	1035	1200	1370	1540	1710	1875
											10 LT	1290	1505	1715	1925	2135	2345
											10 HT	1035	1200	1370	1540	1710	1875
	420/70 R 28	133 A8/B	W 13	W 12; W 14 L	418	1349	604	4020	650	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6
											km/h	1135	1320	1505	1690	1875	2060
											50	1135	1320	1505	1690	1875	2060
											40	1215	1415	1610	1810	2010	2205
											10 LT	1525	1770	2020	2270	2520	2765
											10 HT	1215	1415	1610	1810	2010	2205
	480/70 R 28	140 A8/B	W 15 L	W 14 L; W 16 L	479	1421	634	4183	675	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6
											km/h	1375	1600	1825	2050	2275	2500
											50	1375	1600	1825	2050	2275	2500
											40	1475	1715	1955	2195	2435	2675
											10 LT	1845	2145	2450	2750	3050	3350
											10 HT	1475	1715	1955	2195	2435	2675
30"	420/70 R 30	134 A8/B	W 13	W 12; W 14 L	418	1398	631	4172	675	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6
											km/h	1170	1360	1550	1740	1930	2120
											50	1170	1360	1550	1740	1930	2120
											40	1250	1455	1660	1865	2070	2270
											10 LT	1565	1825	2080	2335	2590	2845
											10 HT	1250	1455	1660	1865	2070	2270
	480/70 R 30	141 A8/B	W 15 L	W 14 L; W 16 L	479	1478	659	4322	700	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6
											km/h	1420	1650	1880	2115	2345	2575
											50	1420	1650	1880	2115	2345	2575
											40	1520	1770	2015	2265	2515	2760
											10 LT	1905	2215	2525	2835	3145	3455
											10 HT	1520	1770	2015	2265	2515	2760
	600/70 R 30	152 A8/B	DW 20 B	DW 18 L; W 18 L	591	1602	711	4774	750	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6
											km/h	1955	2275	2595	2915	3235	3550
											50	1955	2275	2595	2915	3235	3550
											40	2090	2435	2775	3120	3460	3800
											10 LT	2620	3050	3475	3905	4335	4760
											10 HT	2090	2435	2775	3120	3460	3800

STD: Standard



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 765 (R-1W)

RADIAL TRACTOR TIRES

AGRIMAX RT 765, a BKT 70 series tire, is suitable for cutting-edge tractors for several heavy-duty applications such as soil tillage, field and road transport, vineyard harvesting, and spraying. A wide contact patch ensures the best possible traction on all surfaces at any time.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)											
		Rec.	Alt.							↓											
34"	480/70 R 34	149 A8/B	W 15 L	W 14 L; W 16 L	479	1580	711	4759	750	STD	bar										
											km/h										
											0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4			
											50	1530	1755	2015	2275	2535	2795	3025	3250		
											40	1530	1755	2015	2275	2535	2795	3025	3250		
											30	1640	1880	2160	2440	2715	2995	3240	3480		
10 LT	2050	2355	2705	3050	3400	3750	4055	4355													
10 HT	1640	1880	2160	2440	2715	2995	3240	3480													
	480/70 R 34	155 A8/B	W 15 L	W 14 L; W 16 L	479	1580	711	4759	750	STD	bar										
											km/h										
											0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2	
											50	1530	1755	2015	2275	2535	2795	3025	3250	3605	3875
											40	1530	1755	2015	2275	2535	2795	3025	3250	3605	3875
											30	1640	1880	2160	2440	2715	2995	3240	3480	3860	4150
10 LT	2050	2355	2705	3050	3400	3750	4055	4355	4835	5195											
10 HT	1640	1880	2160	2440	2715	2995	3240	3480	3860	4150											
	520/70 R 34	148 A8/B	W 16 L	W 15 L; W 18 L	516	1640	739	4901	775	STD	bar										
											km/h										
											0.6	0.8	1.0	1.2	1.4	1.6					
											50	1735	2020	2300	2585	2870	3150				
											40	1735	2020	2300	2585	2870	3150				
											30	1860	2160	2465	2770	3075	3375				
10 LT	2325	2705	3085	3465	3845	4225															
10 HT	1860	2160	2465	2770	3075	3375															
38"	480/70 R 38	145 A8/B	W 15 L	W 14 L; W 16 L	479	1681	764	5015	800	STD	bar										
											km/h										
											0.6	0.8	1.0	1.2	1.4	1.6					
											50	1595	1860	2120	2380	2640	2900				
											40	1595	1860	2120	2380	2640	2900				
											30	1710	1990	2270	2550	2830	3105				
10 LT	2140	2490	2840	3190	3540	3890															
10 HT	1710	1990	2270	2550	2830	3105															
	520/70 R 38	150 A8/B	W 16 L	W 15 L; W 18 L	516	1749	793	5300	825	STD	bar										
											km/h										
											0.6	0.8	1.0	1.2	1.4	1.6					
											50	1845	2145	2450	2750	3050	3350				
											40	1845	2145	2450	2750	3050	3350				
											30	1975	2295	2620	2940	3265	3585				
10 LT	2470	2875	3280	3685	4090	4490															
10 HT	1975	2295	2620	2940	3265	3585															
	580/70 R 38	155 A8/B	W 18 L	-	577	1827	821	5505	875	STD	bar										
											km/h										
											0.6	0.8	1.0	1.2	1.4	1.6					
											50	2135	2480	2830	3180	3530	3875				
											40	2135	2480	2830	3180	3530	3875				
											30	2285	2660	3030	3405	3780	4150				
10 LT	2860	3325	3795	4260	4730	5195															
10 HT	2285	2660	3030	3405	3780	4150															

STD: Standard



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 765 (R-1W)

RADIAL TRACTOR TIRES

AGRIMAX RT 765, a BKT 70 series tire, is suitable for cutting-edge tractors for several heavy-duty applications such as soil tillage, field and road transport, vineyard harvesting, and spraying. A wide contact patch ensures the best possible traction on all surfaces at any time.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)										
		Rec.	Alt.																	
38" 580/70 R 38	180 A8	W 18 L	-	577	1827	821	5505	875	SB	bar										
										km/h										
										1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4	4.6	
										50	3180	3875	4490	4990	5460	5890	6310	6710	7090	7280
										40	3180	3875	4930	5480	6000	6470	6930	7370	7790	8000
30	3405	4150	5280	5860	6420	6920	7420	7890	8340	8560										
25	3535	4305	5470	6080	6660	7180	7690	8180	8650	8880										
620/70 R 38	170 A8/B	DW 20 B	-	625	1833	828	5591	875	STD	bar										
										km/h										
										0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2	
										50	2340	2760	3180	3540	3960	4320	4680	5100	5580	6000
										40	2340	2760	3180	3540	3960	4320	4680	5100	5580	6000
										30	2505	2955	3405	3790	4240	4625	5010	5460	5975	6420
										10LT	3140	3700	4265	4745	5310	5790	6275	6835	7480	8040
10HT	2505	2955	3405	3790	4240	4625	5010	5460	5975	6420										
710/70 R 38	166 A8/B	DW 23 B	-	716	1959	859	5751	925	STD	bar										
										km/h										
										0.6	0.8	1.0	1.2	1.4	1.6					
										50	2915	3395	3870	4350	4825	5300				
										40	2915	3395	3870	4350	4825	5300				
										30	3125	3635	4145	4655	5165	5675				
										10 LT	3910	4550	5190	5830	6470	7105				
10 HT	3125	3635	4145	4655	5165	5675														
710/70 R 38	171 D/174 A8	DW 23 B	-	716	1959	859	5751	925	STD	bar										
										km/h										
										0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4			
										65	2895	3325	3815	4305	4800	5290	5785	6150		
										50	3040	3490	4010	4525	5040	5560	6075	6460		
										40	3150	3620	4155	4690	5230	5765	6300	6700		
										30	3330	3825	4390	4955	5520	6085	6655	7075		
10 LT	3880	4455	5115	5775	6435	7095	7755	8245												
10 HT	3330	3825	4390	4955	5520	6085	6655	7075												
710/70 R 38	178 A8/B	DW 23 B	-	716	1959	859	5751	925	STD	bar										
										km/h										
										0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2	
										50	2915	3395	3870	4350	4825	5300	5925	6375	6975	7500
										40	2915	3395	3870	4350	4825	5300	5925	6375	6975	7500
										30	3125	3635	4145	4655	5165	5675	6340	6825	7465	8025
										10 LT	3910	4550	5190	5830	6470	7105	7940	8545	9350	10050
10 HT	3125	3635	4145	4655	5165	5675	6340	6825	7465	8025										

STD: Standard
SB: Steel Belted



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 765 (R-1W)

RADIAL TRACTOR TIRES

AGRIMAX RT 765, a BKT 70 series tire, is suitable for cutting-edge tractors for several heavy-duty applications such as soil tillage, field and road transport, vineyard harvesting, and spraying. A wide contact patch ensures the best possible traction on all surfaces at any time.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)										
		Rec.	Alt.							↓										
42" 620/70 R 42	160 A8/B	DW 20 B	-	625	1935	876	5742	925	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6				
										km/h										
										50	2475	2880	3285	3690	4095	4500				
										40	2475	2880	3285	3690	4095	4500				
										30	2650	3085	3515	3950	4385	4815				
										10 LT	3320	3860	4405	4945	5490	6030				
										10 HT	2650	3085	3515	3950	4385	4815				
620/70 R 42	166 A8/B	DW 20 B	-	625	1935	876	5742	925	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4		
										km/h										
										50	2475	2880	3285	3690	4095	4500	4930	5300		
										40	2475	2880	3285	3690	4095	4500	4930	5300		
										30	2650	3085	3515	3950	4385	4815	5275	5670		
										10 LT	3320	3860	4405	4945	5490	6030	6605	7100		
										10 HT	2650	3085	3515	3950	4385	4815	5275	5670		
710/70 R 42	173 A8/B	DW 23 B	-	716	2061	922	6174	975	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4		
										km/h										
										50	3055	3510	4030	4550	5070	5590	6045	6500		
										40	3055	3510	4030	4550	5070	5590	6045	6500		
										30	3270	3760	4315	4870	5425	5985	6470	6955		
										10 LT	4095	4705	5405	6100	6795	7495	8105	8710		
										10 HT	3270	3760	4315	4870	5425	5985	6470	6955		
710/70 R 42	173 D/176 A8	DW 23 B	-	716	2061	922	6174	975	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4		
										km/h										
										65	3120	3640	4095	4550	5005	5395	5980	6500		
										50	3280	3825	4300	4780	5260	5665	6280	6825		
										40	3410	3980	4475	4970	5470	5895	6535	7100		
										30	3590	4190	4710	5235	5760	6205	6880	7475		
										10 LT	4185	4880	5490	6100	6710	7230	8015	8710		
10 HT	3590	4190	4710	5235	5760	6205	6880	7475												
46" 620/70 R 46	162 A8/B	DW 20 B	-	625	2036	906	6047	975	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6				
										km/h										
										50	2615	3040	3470	3895	4325	4750				
										40	2615	3040	3470	3895	4325	4750				
										30	2800	3255	3715	4170	4630	5085				
										10 LT	3505	4075	4650	5220	5795	6365				
										10 HT	2800	3255	3715	4170	4630	5085				

STD: Standard



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 855 (R-1W)

RADIAL TRACTOR TIRES

AGRIMAX RT 855 is a tire featuring excellent traction and comfort properties. It has been designed mainly for soil tillage and field and road transport, but some sizes are also suitable for row crop, spraying and vineyard harvesting. AGRIMAX RT 855 has excellent self-cleaning features that allow for a quick change from field operations to road usage.



TRACTION

SELF-CLEANING

DURABILITY

COMFORT

STEEL BELTED

SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)													
		Rec.	Alt.							↓													
											bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6				
16"	180/95 R 16 (6.50 R 16)	105 A8/B	5.5 F	6.0 F	185	760	340	2265	360	STD	km/h	50	40	30	10	430	550	670	735	790	865	925	-
											50	430	550	670	735	790	865	925	-				
											40	430	550	670	735	790	865	925	-				
											30	460	585	715	785	845	925	990	-				
											10	505	655	795	950	1085	1130	1255	1390				
16"	210/95 R 16 (7.50 R 16)	106 A8/B	W 7	W 6; 6 LB	214	806	360	2415	390	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4				
											km/h	50	450	515	590	665	745	820	885	950			
											40	450	515	590	665	745	820	885	950				
											30	480	555	635	715	800	880	950	1020				
											10 LT	600	690	795	895	995	1100	1190	1275				
10 HT	480	555	635	715	800	880	950	1020															
18"	210/95 R 18 (7.50 R 18)	108 A8/B	W 7	W 6	214	855	385	2565	410	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4				
											km/h	50	470	540	620	700	780	860	930	1000			
											40	470	540	620	700	780	860	930	1000				
											30	505	580	665	750	835	925	1000	1070				
											10 LT	630	725	835	940	1050	1155	1250	1340				
10 HT	505	580	665	750	835	925	1000	1070															
20"	210/90 R 20 (8.3 R 20)	110 A8/B	W 7	W 6	211	890	412	2681	425	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4				
											km/h	50	500	575	660	745	830	915	990	1060			
											40	500	575	660	745	830	915	990	1060				
											30	535	615	705	795	890	980	1060	1135				
											10 LT	670	770	885	1000	1115	1230	1330	1425				
10 HT	535	615	705	795	890	980	1060	1135															
20"	210/95 R 20 (7.50 R 20)	110 A8/B	W 7	W 6	214	908	418	2749	450	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4				
											km/h	50	500	575	660	745	830	915	990	1060			
											40	500	575	660	745	830	915	990	1060				
											30	535	615	705	795	890	980	1060	1135				
											10 LT	670	770	885	1000	1115	1230	1330	1425				
10 HT	535	615	705	795	890	980	1060	1135															
20"	250/85 R 20 (9.5 R 20)	116 A8/B	W 8	W 7; W 9	250	940	424	2812	450	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4				
											km/h	50	590	675	775	875	975	1075	1165	1250			
											40	590	675	775	875	975	1075	1165	1250				
											30	630	725	835	940	1050	1155	1250	1340				
											10 LT	790	905	1040	1175	1310	1445	1560	1675				
10 HT	630	725	835	940	1050	1155	1250	1340															

STD: Standard



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 855 (R-1W)

RADIAL TRACTOR TIRES

AGRIMAX RT 855 is a tire featuring excellent traction and comfort properties. It has been designed mainly for soil tillage and field and road transport, but some sizes are also suitable for row crop, spraying and vineyard harvesting. AGRIMAX RT 855 has excellent self-cleaning features that allow for a quick change from field operations to road usage.



TRACTION



SELF-CLEANING



DURABILITY



COMFORT



STEEL BELTED

SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)												
		Rec.	Alt.							↓												
20"	280/85 R 20 (11.2 R 20)	112 A8/B	W 10	W 9	292	984	441	2952	475	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6					
											km/h											
											50	620	720	820	920	1020	1120					
											40	620	720	820	920	1020	1120					
											30	660	770	880	985	1095	1200					
											10 LT	830	965	1100	1235	1370	1505					
											10 HT	660	770	880	985	1095	1200					
20"	320/85 R 20 (12.4 R 20)	119 A8/B	W 11	W 9; W 10	329	1052	467	3100	500	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6					
											km/h											
											50	750	875	995	1120	1240	1360					
											40	750	875	995	1120	1240	1360					
											30	805	935	1070	1200	1330	1460					
											10 LT	1005	1170	1335	1500	1665	1825					
											10 HT	805	935	1070	1200	1330	1460					
22"	250/85 R 22 (9.5 R 22)	113 A8/B	W 8	W 7	251	985	453	2964	475	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4			
											km/h											
											50	545	625	715	805	900	990	1070	1150			
											40	545	625	715	805	900	990	1070	1150			
											30	585	670	770	865	965	1065	1150	1235			
											10 LT	730	835	960	1085	1210	1330	1440	1545			
											10 HT	585	670	770	865	965	1065	1150	1235			
24"	250/85 R 24 (9.5 R 24)	109 A8/B	W 8	W 7; W 9	251	1036	475	3104	500	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6					
											km/h											
											50	570	660	755	845	940	1030					
											40	570	660	755	845	940	1030					
											30	610	710	810	910	1010	1105					
											10 LT	765	890	1015	1140	1265	1385					
											10 HT	610	710	810	910	1010	1105					
24"	280/85 R 24 (11.2 R 24)	115 A8/B	W 10	W 9	292	1086	492	3224	525	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6					
											km/h											
											50	670	780	890	1000	1110	1215					
											40	670	780	890	1000	1110	1215					
											30	720	840	955	1075	1190	1305					
											10 LT	900	1045	1190	1340	1485	1630					
											10 HT	720	840	955	1075	1190	1305					
24"	320/85 R 24 (12.4 R 24)	122 A8/B	W 11	W 9; W 10	329	1154	518	3424	550	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6					
											km/h											
											50	825	960	1095	1230	1365	1500					
											40	825	960	1095	1230	1365	1500					
											30	885	1030	1175	1320	1465	1605					
											10 LT	1110	1290	1470	1650	1830	2010					
											10 HT	885	1030	1175	1320	1465	1605					

STD: Standard



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 855 (R-1W)

RADIAL TRACTOR TIRES

AGRIMAX RT 855 is a tire featuring excellent traction and comfort properties. It has been designed mainly for soil tillage and field and road transport, but some sizes are also suitable for row crop, spraying and vineyard harvesting. AGRIMAX RT 855 has excellent self-cleaning features that allow for a quick change from field operations to road usage.



TRACTION

SELF-CLEANING

DURABILITY

COMFORT

STEEL BELTED

SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)						
		Rec.	Alt.							↓						
24" 340/85 R 24 (13.6 R 24)	125 A8/B	W 12	W 11	353	1188	531	3540	575	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6
										km/h	0.6	0.8	1.0	1.2	1.4	1.6
										50	910	1060	1205	1355	1505	1650
										40	910	1060	1205	1355	1505	1650
										30	975	1135	1295	1455	1615	1770
										10 LT	1220	1420	1620	1820	2020	2215
										10 HT	975	1135	1295	1455	1615	1770
380/85 R 24 (14.9 R 24)	131 A8/B	W 12	W 11; W 13	380	1256	554	3699	600	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6
										km/h	0.6	0.8	1.0	1.2	1.4	1.6
										50	1075	1250	1425	1600	1775	1950
										40	1075	1250	1425	1600	1775	1950
										30	1150	1340	1530	1715	1905	2090
										10 LT	1440	1675	1910	2145	2380	2615
										10 HT	1150	1340	1530	1715	1905	2090
420/85 R 24 (16.9 R 24)	137 A8/B	W 15 L	W 14 L; W 13	438	1324	582	3900	625	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6
										km/h	0.6	0.8	1.0	1.2	1.4	1.6
										50	1265	1475	1680	1890	2095	2300
										40	1265	1475	1680	1890	2095	2300
										30	1360	1580	1800	2025	2245	2465
										10 LT	1700	1975	2255	2530	2810	3085
										10 HT	1360	1580	1800	2025	2245	2465
28" 250/85 R 28 (9.5 R 28)	112 A8/B	W 8	W 7; W 9	251	1137	519	3421	550	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6
										km/h	0.6	0.8	1.0	1.2	1.4	1.6
										50	620	720	820	920	1020	1120
										40	620	720	820	920	1020	1120
										30	660	770	880	985	1095	1200
										10 LT	830	965	1100	1235	1370	1505
										10 HT	660	770	880	985	1095	1200
280/85 R 28 (11.2 R 28)	118 A8/B	W 10	W 9	292	1187	545	3558	575	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6
										km/h	0.6	0.8	1.0	1.2	1.4	1.6
										50	730	845	965	1085	1205	1320
										40	730	845	965	1085	1205	1320
										30	780	910	1035	1165	1290	1415
										10 LT	975	1135	1295	1455	1615	1770
										10 HT	780	910	1035	1165	1290	1415
320/85 R 28 (12.4 R 28)	124 A8/B	W 11	W 9; W 10	329	1255	569	3743	600	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6
										km/h	0.6	0.8	1.0	1.2	1.4	1.6
										50	880	1025	1170	1315	1460	1600
										40	880	1025	1170	1315	1460	1600
										30	945	1100	1255	1410	1565	1715
										10 LT	1180	1375	1570	1760	1955	2145
										10 HT	945	1100	1255	1410	1565	1715

STD: Standard



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 855 (R-1W)

RADIAL TRACTOR TIRES

AGRIMAX RT 855 is a tire featuring excellent traction and comfort properties. It has been designed mainly for soil tillage and field and road transport, but some sizes are also suitable for row crop, spraying and vineyard harvesting. AGRIMAX RT 855 has excellent self-cleaning features that allow for a quick change from field operations to road usage.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)							
		Rec.	Alt.							↓							
											bar	0.6	0.8	1.0	1.2	1.4	1.6
28" 340/85 R 28 (13.6 R 28)	127 A8/B	W 12	W 11	353	1289	588	3890	625	STD	km/h	965	1120	1280	1435	1595	1750	
										50	965	1120	1280	1435	1595	1750	
										40	1035	1200	1370	1540	1710	1875	
										30	1290	1505	1715	1925	2135	2345	
										10 LT	1035	1200	1370	1540	1710	1875	
										10 HT	1035	1200	1370	1540	1710	1875	
										bar	0.6	0.8	1.0	1.2	1.4	1.6	
380/85 R 28 (14.9 R 28)	133 A8/B	W 12	W 11; W 13	380	1357	606	4015	650	STD	km/h	1135	1320	1505	1690	1875	2060	
										50	1135	1320	1505	1690	1875	2060	
										40	1215	1415	1610	1810	2010	2205	
										30	1525	1770	2020	2270	2520	2765	
										10 LT	1215	1415	1610	1810	2010	2205	
										10 HT	1215	1415	1610	1810	2010	2205	
										bar	0.6	0.8	1.0	1.2	1.4	1.6	
420/85 R 28 (16.9 R 28)	139 A8/B	W 15 L	W 13; W 14 L	438	1425	638	4214	675	STD	km/h	1340	1560	1775	1995	2215	2430	
										50	1340	1560	1775	1995	2215	2430	
										40	1435	1670	1905	2140	2375	2605	
										30	1795	2090	2380	2675	2970	3260	
										10 LT	1435	1670	1905	2140	2375	2605	
										10 HT	1435	1670	1905	2140	2375	2605	
										bar	0.6	0.8	1.0	1.2	1.4	1.6	
30" 380/85 R 30 (14.9 R 30)	135 A8/B	W 12	W 11; W 13	380	1408	633	4169	675	STD	km/h	1200	1400	1595	1790	1985	2180	
										50	1200	1400	1595	1790	1985	2180	
										40	1285	1495	1705	1915	2125	2335	
										30	1610	1875	2140	2400	2665	2925	
										10 LT	1285	1495	1705	1915	2125	2335	
										10 HT	1285	1495	1705	1915	2125	2335	
										bar	0.6	0.8	1.0	1.2	1.4	1.6	
420/85 R 30 (16.9 R 30)	140 A8/B	W 15 L	W 13; W 14 L	438	1475	661	4393	700	STD	km/h	1375	1600	1825	2050	2275	2500	
										50	1375	1600	1825	2050	2275	2500	
										40	1475	1715	1955	2195	2435	2675	
										30	1845	2145	2450	2750	3050	3350	
										10 LT	1475	1715	1955	2195	2435	2675	
										10 HT	1475	1715	1955	2195	2435	2675	
										bar	0.6	0.8	1.0	1.2	1.4	1.6	
460/85 R 30 (18.4 R 30)	145 A8/B	W 16 L	W 14 L; W 15 L	475	1544	682	4537	725	STD	km/h	1595	1860	2120	2380	2640	2900	
										50	1595	1860	2120	2380	2640	2900	
										40	1710	1990	2270	2550	2830	3105	
										30	2140	2490	2840	3190	3540	3890	
										10 LT	1710	1990	2270	2550	2830	3105	
										10 HT	1710	1990	2270	2550	2830	3105	
										bar	0.6	0.8	1.0	1.2	1.4	1.6	

STD: Standard



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 855 (R-1W)

RADIAL TRACTOR TIRES

AGRIMAX RT 855 is a tire featuring excellent traction and comfort properties. It has been designed mainly for soil tillage and field and road transport, but some sizes are also suitable for row crop, spraying and vineyard harvesting. AGRIMAX RT 855 has excellent self-cleaning features that allow for a quick change from field operations to road usage.



TRACTION

SELF-CLEANING

DURABILITY

COMFORT

STEEL BELTED

SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)													
		Rec.	Alt.							↓													
32" 320/85 R 32 (12.4 R 32)	126 A8/B	W 11	W 9; W 10	329	1357	621	4081	650	STD	bar													
										km/h													
										50	935	1090	1245	1395	1550	1700							
										40	935	1090	1245	1395	1550	1700							
										30	1005	1165	1330	1495	1660	1820							
										10 LT	1255	1460	1665	1870	2075	2280							
										10 HT	1005	1165	1330	1495	1660	1820							
34" 320/85 R 34 (12.4 R 34)	141 A8/B	W 11	W 9; W 10	329	1408	645	4280	675	STD	bar													
										km/h													
										50	930	1085	1420	1730	1880	2010	2190	2370	2575				
										40	930	1085	1420	1730	1880	2010	2190	2370	2575				
										30	995	1160	1520	1850	2015	2155	2350	2540	2760				
										10 LT	1245	1455	1905	2315	2525	2695	2940	3180	3455				
										10 HT	995	1160	1520	1850	2015	2155	2350	2540	2760				
380/85 R 34 (14.9 R 34)	137 A8/B	W 12	W 11; W 13	380	1509	682	4504	725	STD	bar													
										km/h													
										50	1265	1475	1680	1890	2095	2300							
										40	1265	1475	1680	1890	2095	2300							
										30	1360	1580	1800	2025	2245	2465							
										10 LT	1700	1975	2255	2530	2810	3085							
										10 HT	1360	1580	1800	2025	2245	2465							
420/85 R 34 (16.9 R 34)	142 A8/B	W 15 L	W 13; W 14 L	438	1578	709	4677	750	STD	bar													
										km/h													
										50	1460	1700	1935	2175	2415	2650							
										40	1460	1700	1935	2175	2415	2650							
										30	1565	1820	2075	2330	2585	2840							
										10 LT	1960	2280	2600	2920	3240	3555							
										10 HT	1565	1820	2075	2330	2585	2840							
460/85 R 34 (18.4 R 34)	147 A8/B	W 16 L	W 14 L; W 15 L	475	1646	721	4865	775	STD	bar													
										km/h													
										50	1695	1970	2245	2525	2800	3075							
										40	1695	1970	2245	2525	2800	3075							
										30	1815	2110	2410	2705	3000	3295							
										10 LT	2270	2640	3015	3385	3755	4125							
										10 HT	1815	2110	2410	2705	3000	3295							
36" 320/85 R 36 (12.4 R 36)	128 A8/B	W 11	W 9; W 10	329	1458	672	4404	700	STD	bar													
										km/h													
										50	990	1155	1315	1480	1640	1800							
										40	990	1155	1315	1480	1640	1800							
										30	1065	1240	1410	1585	1760	1930							
										10 LT	1330	1550	1765	1985	2200	2415							
										10 HT	1065	1240	1410	1585	1760	1930							

STD: Standard



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 855 (R-1W)

RADIAL TRACTOR TIRES

AGRIMAX RT 855 is a tire featuring excellent traction and comfort properties. It has been designed mainly for soil tillage and field and road transport, but some sizes are also suitable for row crop, spraying and vineyard harvesting. AGRIMAX RT 855 has excellent self-cleaning features that allow for a quick change from field operations to road usage.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)											
		Rec.	Alt.							↓											
36" 340/85 R 36 (13.6 R 36)	132 A8/B	W 12	W 11	353	1492	689	4507	725	STD	bar											
										km/h											
										0.6	0.8	1.0	1.2	1.4	1.6						
										50	1100	1280	1460	1640	1820	2000					
										40	1100	1280	1460	1640	1820	2000					
										30	1180	1370	1565	1755	1950	2140					
										10 LT	1475	1720	1960	2200	2440	2680					
10 HT	1180	1370	1565	1755	1950	2140															
38" 320/85 R 38 (12.4 R 38)	143 A8/B	W 10	W 9; W 11; DW 11	319	1509	700	4580	725	STD	bar											
										km/h											
										0.6	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6			
										50	985	1145	1500	1830	1990	2130	2320	2510	2725		
										40	985	1145	1500	1830	1990	2130	2320	2510	2725		
										30	1055	1230	1610	1960	2135	2280	2485	2690	2920		
										10 LT	1320	1540	2015	2450	2670	2855	3110	3365	3655		
10 HT	1055	1230	1610	1960	2135	2280	2485	2690	2920												
340/85 R 38 (13.6 R 38)	133 A8/B	W 12	W 11	353	1543	712	4613	750	STD	bar											
										km/h											
										0.6	0.8	1.0	1.2	1.4	1.6						
										50	1135	1320	1505	1690	1875	2060					
										40	1135	1320	1505	1690	1875	2060					
										30	1215	1415	1610	1810	2010	2205					
										10 LT	1525	1770	2020	2270	2520	2765					
10 HT	1215	1415	1610	1810	2010	2205															
380/85 R 38 (14.9 R 38)	139 A8/B	W 12	W 11; W 13	380	1611	736	4841	775	STD	bar											
										km/h											
										0.6	0.8	1.0	1.2	1.4	1.6						
										50	1340	1560	1775	1995	2215	2430					
										40	1340	1560	1775	1995	2215	2430					
										30	1435	1670	1905	2140	2375	2605					
										10 LT	1795	2090	2380	2675	2970	3260					
10 HT	1435	1670	1905	2140	2375	2605															
420/85 R 38 (16.9 R 38)	144 A8/B	W 15 L	W 13; W 14 L	438	1679	763	4992	800	STD	bar											
										km/h											
										0.6	0.8	1.0	1.2	1.4	1.6						
										50	1540	1795	2045	2300	2550	2800					
										40	1540	1795	2045	2300	2550	2800					
										30	1650	1920	2190	2460	2730	3000					
										10 LT	2070	2405	2745	3080	3420	3755					
10 HT	1650	1920	2190	2460	2730	3000															
460/85 R 38 (18.4 R 38)	149 A8/B	W 16 L	W 14 L; W 15 L	475	1747	785	5161	825	STD	bar											
										km/h											
										0.6	0.8	1.0	1.2	1.4	1.6						
										50	1790	2080	2375	2665	2960	3250					
										40	1790	2080	2375	2665	2960	3250					
										30	1915	2230	2545	2855	3170	3480					
										10 LT	2400	2790	3180	3575	3965	4355					
10 HT	1915	2230	2545	2855	3170	3480															

STD: Standard



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 855 (R-1W)

RADIAL TRACTOR TIRES

AGRIMAX RT 855 is a tire featuring excellent traction and comfort properties. It has been designed mainly for soil tillage and field and road transport, but some sizes are also suitable for row crop, spraying and vineyard harvesting. AGRIMAX RT 855 has excellent self-cleaning features that allow for a quick change from field operations to road usage.



TRACTION

SELF-CLEANING

DURABILITY

COMFORT

STEEL BELTED

SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)											
		Rec.	Alt.							↓											
38" 480/80 R 38 (18.4 R 38)	149 A8/B	W 16 L	W 14 L; W 15 L	475	1747	785	5161	825	STD	bar											
										km/h											
										0.6	0.8	1.0	1.2	1.4	1.6						
										50	1790	2080	2375	2665	2960	3250					
										40	1790	2080	2375	2665	2960	3250					
										30	1915	2230	2545	2855	3170	3480					
										10 LT	2400	2790	3180	3575	3965	4355					
10 HT	1915	2230	2545	2855	3170	3480															
520/85 R 38 (20.8 R 38)	155 A8/B	DW 16 L	DW 18 L; DD 16 L	516	1849	813	5393	875	STD	bar											
										km/h											
										0.6	0.8	1.0	1.2	1.4	1.6						
										50	2170	2560	2910	3255	3565	3875					
										40	2170	2560	2910	3255	3565	3875					
										30	2325	2740	3115	3490	3820	4150					
										10 LT	2910	3430	3900	4365	4780	5195					
10 HT	2325	2740	3115	3490	3820	4150															
520/85 R 38 (20.8 R 38)	170 A8/B	DW 16 L	DW 18 L; DD 16 L	516	1849	813	5393	875	STD	bar											
										km/h											
										0.6	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6			
										50	2170	2560	3255	3875	4440	4740	5220	5640	6000		
										40	2170	2560	3255	3875	4440	4740	5220	5640	6000		
										30	2325	2740	3490	4150	4755	5075	5590	6035	6420		
										10 LT	2910	3430	4365	5195	5950	6355	6995	7560	8040		
10 HT	2325	2740	3490	4150	4755	5075	5590	6035	6420												
42" 480/80 R 42 (18.4 R 42)	151 A8/B	W 16 A; DD 16; DW 16 A	DD 16 L; DW 16 L; W 16 L	479	1835	835	5459	875	STD	bar											
										km/h											
										0.6	0.8	1.0	1.2	1.4	1.6						
										50	1900	2210	2520	2830	3140	3450					
										40	1900	2210	2520	2830	3140	3450					
										30	2035	2365	2700	3030	3365	3695					
										10 LT	2545	2960	3380	3795	4210	4625					
10 HT	2035	2365	2700	3030	3365	3695															
520/85 R 42 (20.8 R 42)	157 A8/B	DW 16 A; W 16 A; DD 16	DW 18 A; DD 18; W 18 A; DD 18 L	516	1951	858	5735	925	STD	bar											
										km/h											
										0.6	0.8	1.0	1.2	1.4	1.6						
										50	2270	2640	3015	3385	3755	4125					
										40	2270	2640	3015	3385	3755	4125					
										30	2430	2830	3225	3625	4020	4415					
										10 LT	3045	3540	4040	4535	5035	5530					
10 HT	2430	2830	3225	3625	4020	4415															
520/85 R 42 (20.8 R 42)	167 A8/B	DW 16 A; W 16 A; DD 16	DW 18 A; DD 18; W 18 A; DD 18 L	516	1951	858	5735	925	STD	bar											
										km/h											
										0.6	0.8	1.0	1.2	1.4	1.6	2.4	2.8	3.2			
										50	2270	2640	3015	3385	3755	4125	4635	5070	5450		
										40	2270	2640	3015	3385	3755	4125	4635	5070	5450		
										30	2430	2830	3225	3625	4020	4415	4960	5425	5830		
										10 LT	3045	3540	4040	4535	5035	5530	6210	6795	7305		
10 HT	2430	2830	3225	3625	4020	4415	4960	5425	5830												

STD: Standard



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 855 (R-1W)

RADIAL TRACTOR TIRES

AGRIMAX RT 855 is a tire featuring excellent traction and comfort properties. It has been designed mainly for soil tillage and field and road transport, but some sizes are also suitable for row crop, spraying and vineyard harvesting. AGRIMAX RT 855 has excellent self-cleaning features that allow for a quick change from field operations to road usage.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)												
		Rec.	Alt.							↓												
											bar											
											km/h	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4			
46" 420/80 R 46 (16.9 R 46)	151 D/162 A2	W 13	W 12	418	1840	863	5619	875	STD	65	1625	1865	2140	2415	2695	2970	3210	3450				
										50	1705	1960	2250	2540	2830	3120	3375	3625				
										40	1780	2045	2345	2650	2950	3255	3520	3780				
										30	1870	2145	2465	2780	3100	3415	3695	3970				
										10	2235	2565	2945	3325	3705	4085	4420	4750				
										10 LT	2175	2500	2870	3240	3610	3980	4305	4625				
										10 HT	1870	2145	2465	2780	3100	3415	3695	3970				
420/80 R 46 (16.9 R 46)	159 D/170 A2	W 13	W 12	418	1840	863	5619	875	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2		
										km/h	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2		
										65	1625	1865	2140	2415	2695	2970	3210	3450	4070	4375		
										50	1705	1960	2250	2540	2830	3120	3375	3625	4275	4595		
										40	1780	2045	2345	2650	2950	3255	3520	3780	4460	4795		
										30	1870	2145	2465	2780	3100	3415	3695	3970	4685	5035		
										10	2235	2565	2945	3325	3705	4085	4420	4750	5580	6000		
10 LT	2175	2500	2870	3240	3610	3980	4305	4625	5455	5865												
10 HT	1870	2145	2465	2780	3100	3415	3695	3970	4685	5035												
480/80 R 46 (18.4 R 46)	158 A8/B	DW 16 A; W 16 A; DD 16	W 16 L; DD 16 L; DW 16 L	479	1936	895	5871	925	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4				
										km/h	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4				
										50	2000	2295	2635	2975	3315	3655	3955	4250				
										40	2000	2295	2635	2975	3315	3655	3955	4250				
										30	2140	2460	2825	3185	3550	3915	4235	4550				
										10 LT	2680	3080	3535	3990	4445	4900	5300	5695				
										10 HT	2140	2460	2825	3185	3550	3915	4235	4550				
480/80 R 46 (18.4 R 46)	164 A8/B	DW 16 A; W 16 A; DD 16	W 16 L; DD 16 L; DW 16 L	479	1936	895	5871	925	STD	bar	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2			
										km/h	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2			
										50	2295	2635	2975	3315	3655	3955	4250	4650	5000			
										40	2295	2635	2975	3315	3655	3955	4250	4650	5000			
										30	2460	2825	3185	3550	3915	4235	4550	4975	5350			
										10 LT	3080	3535	3990	4445	4900	5300	5695	6230	6700			
										10 HT	2460	2825	3185	3550	3915	4235	4550	4975	5350			
520/85 R 46 (20.8 R 46)	158 A8/B	DW 16 L; W 16 A; W 16 L; DD 16	DW 18 L; W 18 L; W 18 A	516	2052	949	6252	975	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6						
										km/h	0.6	0.8	1.0	1.2	1.4	1.6						
										50	2340	2720	3105	3485	3870	4250						
										40	2340	2720	3105	3485	3870	4250						
										30	2505	2915	3325	3735	4145	4550						
										10 LT	3135	3645	4160	4670	5185	5695						
										10 HT	2505	2915	3325	3735	4145	4550						

STD: Standard



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 855 (R-1W)

RADIAL TRACTOR TIRES

AGRIMAX RT 855 is a tire featuring excellent traction and comfort properties. It has been designed mainly for soil tillage and field and road transport, but some sizes are also suitable for row crop, spraying and vineyard harvesting. AGRIMAX RT 855 has excellent self-cleaning features that allow for a quick change from field operations to road usage.



TRACTION

SELF-CLEANING

DURABILITY

COMFORT

STEEL BELTED

SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)																						
		Rec.	Alt.																													
46" 520/85 R 46 (20.8 R 46)	173 A8/B	DW 16 L; W 16 A; W 16 L; DD 16	DW 18 L; W 18 L; W 18 A	516	2052	949	6252	975	STD	bar																						
										km/h	0.6	0.8	1.0	1.2	1.4	1.6	2.4	2.8	3.2	3.6	4.0											
										50	2340	2720	3105	3485	3870	4250	4875	5330	5785	6175	6500											
										40	2340	2720	3105	3485	3870	4250	4875	5330	5785	6175	6500											
										30	2505	2915	3325	3735	4145	4550	5215	5705	6190	6605	6955											
										10 LT	3135	3645	4160	4670	5185	5695	6535	7140	7750	8275	8710											
10 HT	2505	2915	3325	3735	4145	4550	5215	5705	6190	6605	6955																					
50" 480/80 R 50 (18.4 R 50)	159 A8/B	DW 16 A	DW 15 A; W 15 A	489	2036	941	6158	975	STD	bar																						
										km/h	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4														
										50	2060	2365	2715	3065	3415	3765	4070	4375														
										40	2060	2365	2715	3065	3415	3765	4070	4375														
										30	2205	2530	2905	3280	3655	4030	4360	4685														
										10 LT	2760	3170	3640	4110	4575	5045	5455	5865														
10 HT	2205	2530	2905	3280	3655	4030	4360	4685																								
480/80 R 50 (18.4 R 50)	176 A8	DW 16 A	DW 15 A; W 15 A	489	2036	945	6228	975	SB	bar																						
										km/h	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4	5.0								
										50	2060	2365	2715	3065	3415	3765	4070	4375	4760	5185	5470	5825	6320	7100								
										40	2060	2365	2715	3065	3415	3765	4070	4375	4760	5185	5470	5825	6320	7100								
										30	2205	2530	2905	3280	3655	4030	4360	4685	5095	5550	5855	6235	6765	7600								
										10 LT	2760	3170	3640	4110	4575	5045	5455	5865	6380	6950	7330	7805	8470	9515								
10 HT	2205	2530	2905	3280	3655	4030	4360	4685	5095	5550	5855	6235	6765	7600																		

STD: Standard
SB: Steel Belted



MAIN APPLICATION:
TRACTOR



AGRIMAX SPARGO (R-1)

RADIAL 'VF' SPRAYER TIRES

AGRIMAX SPARGO is the special BKT tire for row crop applications. It has been designed for enhanced productivity in the fields and preserving the soil in the long term. The tire provides excellent self-cleaning features in addition to higher load capacity at standard pressure. AGRIMAX SPARGO ensures an outstanding traction along with strong stability both in the fields and during road transfers.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)																																											
		Rec.	Alt.																																																		
38" VF 380/85 R 38	161 D	W 13	W 12	380	1602	730	4830	775	STD	<table border="1"> <tr> <td>bar</td> <td>0.6</td><td>0.8</td><td>1.0</td><td>1.2</td><td>1.4</td><td>1.6</td><td>2.0</td><td>2.4</td><td>2.8</td><td>3.2</td> </tr> <tr> <td>km/h</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>From 10 to 65</td> <td>1805</td><td>2130</td><td>2455</td><td>2730</td><td>3055</td><td>3330</td><td>3610</td><td>3935</td><td>4305</td><td>4625</td> </tr> </table>											bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2	km/h											From 10 to 65	1805	2130	2455	2730	3055	3330	3610	3935	4305	4625
										bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2																																	
										km/h																																											
From 10 to 65	1805	2130	2455	2730	3055	3330	3610	3935	4305	4625																																											
46" VF 380/90 R 46	173 D	DW 13 A	W 13 A; DW 12	390	1852	846	5611	875	STD	<table border="1"> <tr> <td>bar</td> <td>2.2</td><td>2.4</td><td>2.6</td><td>2.9</td><td>3.2</td><td>3.6</td><td>4.0</td><td>4.3</td><td>4.4</td> </tr> <tr> <td>km/h</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>From 10 to 65</td> <td>4355</td><td>4615</td><td>4810</td><td>5135</td><td>5460</td><td>5785</td><td>5980</td><td>6370</td><td>6500</td> </tr> </table>											bar	2.2	2.4	2.6	2.9	3.2	3.6	4.0	4.3	4.4	km/h										From 10 to 65	4355	4615	4810	5135	5460	5785	5980	6370	6500			
										bar	2.2	2.4	2.6	2.9	3.2	3.6	4.0	4.3	4.4																																		
										km/h																																											
From 10 to 65	4355	4615	4810	5135	5460	5785	5980	6370	6500																																												
50" VF 380/105 R 50	179 D	DW 13	TW 13; W 13	400	2050	934	6211	975	STD	<table border="1"> <tr> <td>bar</td> <td>2.2</td><td>2.4</td><td>2.6</td><td>2.9</td><td>3.2</td><td>3.6</td><td>4.0</td><td>4.3</td><td>4.4</td> </tr> <tr> <td>km/h</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>From 10 to 65</td> <td>5195</td><td>5505</td><td>5735</td><td>6125</td><td>6510</td><td>6900</td><td>7130</td><td>7595</td><td>7750</td> </tr> </table>											bar	2.2	2.4	2.6	2.9	3.2	3.6	4.0	4.3	4.4	km/h										From 10 to 65	5195	5505	5735	6125	6510	6900	7130	7595	7750			
										bar	2.2	2.4	2.6	2.9	3.2	3.6	4.0	4.3	4.4																																		
										km/h																																											
From 10 to 65	5195	5505	5735	6125	6510	6900	7130	7595	7750																																												
VF 420/95 R 50	177 D	DW 14	DW 13; W 13; W 14	419	2068	943	6210	975	STD	<table border="1"> <tr> <td>bar</td> <td>1.8</td><td>2.0</td><td>2.2</td><td>2.4</td><td>2.6</td><td>2.8</td><td>3.0</td><td>3.2</td><td>3.4</td><td>3.6</td> </tr> <tr> <td>km/h</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>From 10 to 65</td> <td>5150</td><td>5365</td><td>5585</td><td>5800</td><td>6075</td><td>6350</td><td>6625</td><td>6900</td><td>7100</td><td>7300</td> </tr> </table>											bar	1.8	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6	km/h										From 10 to 65	5150	5365	5585	5800	6075	6350	6625	6900	7100	7300	
										bar	1.8	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6																																	
										km/h																																											
From 10 to 65	5150	5365	5585	5800	6075	6350	6625	6900	7100	7300																																											

STD: Standard



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 945 (R-1W)

RADIAL TRACTOR TIRES

AGRIMAX RT 945 is specially designed for row crops: it does not damage the crops and preserves the yield. Excellent self-cleaning features allow for a quick change from field operations to road usage, where AGRIMAX RT 945 shows brilliant performance. It is suitable for compact utility tractors in municipality and maintenance applications.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)											
		Rec.	Alt.							↓											
											bar										
											km/h	0.8	1.2	1.6	2.0	2.4	2.8				
42" 320/90 R 42 (12.4 R 42)	139 A8/B	W 10	W 9; W 11	319	1643	760	4944	800	STD	bar											
										km/h	0.8	1.2	1.6	2.0	2.4	2.8					
										50	1315	1705	2090	2260	2430	-					
										40	1315	1705	2090	2260	2430	-					
										30	1410	1825	2245	2425	2605	-					
10	1935	2370	2880	3355	3540	3645															
46" 320/90 R 46 (12.4 R 46)	146 A8/B	W 10	W 9; W 11	319	1744	810	5232	825	STD	bar											
										km/h	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6			
										50	1380	1770	2160	2370	2550	2790	3000	-			
										40	1380	1770	2160	2370	2550	2790	3000	-			
										30	1480	1895	2315	2540	2730	2990	3210	-			
10	1620	2115	2565	3060	3510	3645	4050	4500													
380/90 R 46 (14.9 R 46)	155 A8/B	W 12	W 11; W 13	380	1852	859	5596	875	STD	bar											
										km/h	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6			
										50	1785	2290	2790	3065	3295	3605	3875	-			
										40	1785	2290	2790	3065	3295	3605	3875	-			
										30	1910	2450	2990	3280	3530	3860	4150	-			
10	2095	2735	3315	3955	4540	4715	5235	5815													
380/90 R 46 (14.9 R 46)	159 A8/B	W 12	W 11; W 13	380	1852	859	5596	875	STD	bar											
										km/h	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4	
										50	1785	2290	2790	3065	3295	3605	3875	4070	4375	-	
										40	1785	2290	2790	3065	3295	3605	3875	4070	4375	-	
										30	1910	2450	2990	3280	3530	3860	4150	4360	4685	-	
10	2095	2735	3315	3955	4540	4715	5235	5815	6040	6565											
50" 320/90 R 50 (12.4 R 50)	150 A8/B	W 10	W 9; W 11	319	1846	873	5618	875	STD	bar											
										km/h	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0		
										50	1410	1845	2245	2450	2615	2850	3085	3350	-		
										40	1410	1845	2245	2450	2615	2850	3085	3350	-		
										30	1510	1975	2405	2620	2800	3050	3300	3585	-		
10	1960	2565	3120	3420	3620	3970	4325	4675	5025												
380/90 R 50 (14.9 R 50)	151 A8/B	W 12	W 11; W 13	380	1954	913	5902	975	STD	bar											
										km/h	0.8	1.2	1.6	2.0	2.4	2.8					
										50	1865	2415	2970	3210	3450	-					
										40	1865	2415	2970	3210	3450	-					
										30	2000	2590	3180	3440	3695	-					
10	2745	3365	4090	4765	5020	5175															

STD: Standard



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 945 (R-1W)

RADIAL TRACTOR TIRES

AGRIMAX RT 945 is specially designed for row crops: it does not damage the crops and preserves the yield. Excellent self-cleaning features allow for a quick change from field operations to road usage, where AGRIMAX RT 945 shows brilliant performance. It is suitable for compact utility tractors in municipality and maintenance applications.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)											
		Rec.	Alt.																		
54" 320/90 R 54 (12.4 R 54)	156 A8/B	W 10	W 9; W 11	319	1948	930	5987	925	STD	bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4	4.8
										km/h	1500	1935	2340	2595	2740	2955	3250	3470	3650	4000	-
										50	1500	1935	2340	2595	2740	2955	3250	3470	3650	4000	-
										40	1605	2075	2505	2780	2935	3210	3480	3715	3910	4280	-
										10	-	1860	2340	2880	3420	3960	4080	4560	5040	5520	6000
380/90 R 54 (14.9 R 54)	158 A8/B	W 12	W 11; W 13	380	2056	962	6296	1025	STD	bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6			
										km/h	1955	2510	3060	3315	3615	3955	4250	-			
										50	1955	2510	3060	3315	3615	3955	4250	-			
										40	2095	2685	3280	3550	3870	4235	4550	-			
										10	2295	3000	3635	4335	4975	5165	5740	6375			

STD: Standard



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 955 (R-1)

RADIAL TRACTOR TIRES

AGRIMAX RT 955 is a BKT radial tire for row crop applications, while some sizes are also suitable for spraying. The special tread design with a rounded shoulder provides excellent traction performance and continuous contact on the land in order to protect both valuable crops and soil from damage.



TRACTION

SELF-CLEANING

STABILITY

DURABILITY

FIELD PROTECTION

SPECIAL COMPOUND

SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)												
		Rec.	Alt.							↓												
											bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8		
											km/h											
24" 210/90 R 24 (8.3 R 24)	107 A8/B	W 7	W 6	214	1010	462	3027	475	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8			
										km/h												
										50	460	530	605	685	765	840	910	975	-			
										40	460	530	605	685	765	840	910	975	-			
										30	495	565	650	735	820	900	975	1045	-			
10	675	780	865	955	1055	1160	1350	1425	1465													
28" 210/95 R 28 (8.3 R 28)	116 A8/B	W 7	W 6	214	1111	513	3333	550	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8			
										km/h												
										50	590	675	775	875	975	1075	1165	1250	-			
										40	590	675	775	875	975	1075	1165	1250	-			
										30	630	725	835	940	1050	1155	1250	1340	-			
10	865	995	1110	1220	1350	1485	1725	1820	1875													
32" 210/95 R 32 (8.3 R 32)	120 A8/B	W 7	W 6	214	1213	571	3703	575	STD	bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6				
										km/h												
										50	645	830	1010	1095	1190	1305	1400	-				
										40	645	830	1010	1095	1190	1305	1400	-				
										30	690	885	1080	1170	1275	1395	1500	-				
10	905	1180	1430	1555	1660	1830	1975	2100														
230/95 R 32 (9.5 R 32)	128 A8/B	W 8	W 7	238	1251	585	3792	600	STD	bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4		
										km/h												
										50	705	920	1120	1225	1300	1425	1550	1675	1800	-		
										40	705	920	1120	1225	1300	1425	1550	1675	1800	-		
										30	755	985	1200	1315	1390	1525	1660	1795	1930	-		
10	840	1055	1300	1540	1785	1840	2055	2270	2485	2700												
270/95 R 32 (11.2 R 32)	136 A8/B	W 9	W 8; W 10	275	1327	614	4044	625	STD	bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4		
										km/h												
										50	875	1145	1390	1525	1615	1770	1930	2085	2240	-		
										40	875	1145	1390	1525	1615	1770	1930	2085	2240	-		
										30	940	1225	1490	1635	1730	1900	2065	2235	2400	-		
10	1045	1315	1615	1920	2220	2285	2555	2825	3095	3360												
36" 230/95 R 36 (9.5 R 36)	130 A8/B	W 8	W 7	238	1352	639	4112	650	STD	bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4		
										km/h												
										50	745	970	1180	1295	1370	1505	1635	1770	1900	-		
										40	745	970	1180	1295	1370	1505	1635	1770	1900	-		
										30	795	1040	1265	1385	1470	1610	1755	1895	2035	-		
10	885	1115	1370	1625	1885	1940	2170	2395	2625	2850												
270/95 R 36 (11.2 R 36)	139 A8/B	W 9	W 8; W 10	275	1428	665	4368	675	STD	bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4		
										km/h												
										50	950	1240	1510	1655	1750	1920	2090	2260	2430	-		
										40	950	1240	1510	1655	1750	1920	2090	2260	2430	-		
										30	1020	1330	1620	1775	1880	2060	2245	2425	2605	-		
10	1130	1425	1750	2080	2410	2480	2775	3065	3355	3645												

STD: Standard



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 955 (R-1)

RADIAL TRACTOR TIRES

AGRIMAX RT 955 is a BKT radial tire for row crop applications, while some sizes are also suitable for spraying. The special tread design with a rounded shoulder provides excellent traction performance and continuous contact on the land in order to protect both valuable crops and soil from damage.



TRACTION

SELF-CLEANING

STABILITY

DURABILITY

FIELD PROTECTION

SPECIAL COMPOUND

SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)											
		Rec.	Alt.							↓											
											bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4
38" 270/95 R 38 (11.2 R 38)	140 A8/B	W 9	W 8; W 10	275	1479	697	4510	700	STD	km/h	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4	
										50	975	1275	1550	1700	1800	1975	2150	2325	2500	-	
										40	975	1275	1550	1700	1800	1975	2150	2325	2500	-	
										30	1045	1365	1660	1820	1930	2115	2305	2490	2675	-	
										10	1165	1465	1800	2140	2475	2550	2850	3150	3450	3750	
42" 230/95 R 42 (9.5 R 42)	133 A8/B	W 8	W 7	238	1506	714	4633	725	STD	km/h	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4	
										50	805	1055	1280	1405	1485	1630	1775	1920	2060	-	
										40	805	1055	1280	1405	1485	1630	1775	1920	2060	-	
										30	860	1125	1370	1500	1590	1745	1900	2055	2205	-	
										10	960	1210	1485	1765	2040	2105	2350	2600	2845	3090	
300/85 R 42 (11.2 R 42)	144 A8/B	W 9	W 10; W 11	295	1577	745	4850	750	STD	km/h	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4	
										50	1150	1485	1795	1960	2100	2300	2495	2660	2800	-	
										40	1150	1485	1795	1960	2100	2300	2495	2660	2800	-	
										30	1230	1590	1920	2100	2250	2460	2670	2850	3000	-	
										10	1305	1640	2020	2395	2775	2860	3195	3530	3865	4200	
44" 210/95 R 44 (8.3 R 44)	120 A8/B	W 7	W 6	214	1518	716	4554	725	STD	km/h	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8		
										50	660	760	870	980	1095	1205	1305	1400	-		
										40	660	760	870	980	1095	1205	1305	1400	-		
										30	705	810	930	1050	1170	1290	1395	1500	-		
										10	970	1115	1240	1365	1515	1660	1935	2040	2100		
230/95 R 44 (9.5 R 44)	134 A8/B	W 8	W 7	238	1556	739	4788	750	STD	km/h	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4	
										50	830	1085	1315	1445	1530	1675	1825	1975	2120	-	
										40	830	1085	1315	1445	1530	1675	1825	1975	2120	-	
										30	890	1160	1410	1545	1635	1795	1955	2115	2270	-	
										10	990	1245	1530	1815	2100	2165	2420	2675	2930	3180	
270/95 R 44 (11.2 R 44)	142 A8/B	W 9	W 8; W 10	275	1632	764	4983	775	STD	km/h	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4	
										50	1035	1355	1645	1805	1910	2095	2280	2465	2650	-	
										40	1035	1355	1645	1805	1910	2095	2280	2465	2650	-	
										30	1110	1450	1765	1935	2045	2245	2445	2645	2840	-	
										10	1235	1555	1910	2270	2625	2705	3025	3340	3660	3975	

STD: Standard



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 955 (R-1)

RADIAL TRACTOR TIRES

AGRIMAX RT 955 is a BKT radial tire for row crop applications, while some sizes are also suitable for spraying. The special tread design with a rounded shoulder provides excellent traction performance and continuous contact on the land in order to protect both valuable crops and soil from damage.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)																					
		Rec. 	Alt. 																												
46" 270/95 R 46 (11.2 R 46)	143 A8/B	W 9	W 8; W 10	275	1683	786	5049	825	STD	bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4											
										km/h																					
										50	1120	1445	1745	1910	2045	2235	2430	2590	2725	-											
										40	1120	1445	1745	1910	2045	2235	2430	2590	2725	-											
										30	1200	1550	1870	2045	2190	2395	2600	2775	2920	-											
10	1545	2000	2410	2640	2825	3090	3355	3580	3765	4090																					
300/95 R 46 (12.4 R 46)	148 A8/B	W 9	W 10; W 11; DW 10; DW 11	295	1738	812	5318	825	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4								
										km/h																					
										50	1105	1295	1485	1670	1860	2020	2205	2365	2585	2805	2995	3150	-								
										40	1105	1295	1485	1670	1860	2020	2205	2365	2585	2805	2995	3150	-								
										30	1185	1385	1590	1790	1995	2160	2365	2535	2770	3005	3210	3375	-								
20	1360	1590	1825	2055	2290	2480	2715	2910	3180	3450	3685	3875	-																		
10	1525	1785	2045	2310	2570	2785	3045	3265	3570	3875	4135	4350	4725																		
300/95 R 46 (12.4 R 46)	148 A8/B	W 9	W 10; W 11; DW 10; DW 11	295	1738	812	5318	825	SPL	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4								
										km/h																					
										50	1105	1295	1485	1670	1860	2020	2205	2365	2585	2805	2995	3150	-								
										40	1105	1295	1485	1670	1860	2020	2205	2365	2585	2805	2995	3150	-								
										30	1185	1385	1590	1790	1995	2160	2365	2535	2770	3005	3210	3375	-								
20	1360	1590	1825	2055	2290	2480	2715	2910	3180	3450	3685	3875	-																		
10	1525	1785	2045	2310	2570	2785	3045	3265	3570	3875	4135	4350	4725																		
340/85 R 46 (13.6 R 46)	150 A8/B	W 12	W 11	353	1746	811	5238	825	STD	bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0												
										km/h																					
										50	1445	1880	2280	2480	2650	2915	3150	3350	-												
										40	1445	1880	2280	2480	2650	2915	3150	3350	-												
										30	1545	2010	2440	2655	2835	3120	3370	3585	-												
10	2065	2665	3220	3520	3770	4125	4475	4775	5025																						
48" 230/95 R 48 (9.5 R 48)	136 A8/B	W 8	W 7	238	1656	792	5085	800	STD	bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4											
										km/h																					
										50	875	1145	1390	1525	1615	1770	1930	2085	2240	-											
										40	875	1145	1390	1525	1615	1770	1930	2085	2240	-											
										30	940	1225	1490	1635	1730	1900	2065	2235	2400	-											
10	1045	1315	1615	1920	2220	2285	2555	2825	3095	3360																					

STD: Standard
SPL: Special



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 955 (R-1)

RADIAL TRACTOR TIRES

AGRIMAX RT 955 is a BKT radial tire for row crop applications, while some sizes are also suitable for spraying. The special tread design with a rounded shoulder provides excellent traction performance and continuous contact on the land in order to protect both valuable crops and soil from damage.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)											
		Rec. 	Alt. 							↓ 											
48" 270/95 R 48 (11.2 R 48)	144 A8/B	W 9	W 8; W 10	275	1733	820	5351	825	STD	bar											
										km/h											
										0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4		
										50	1095	1430	1740	1905	2020	2215	2410	2605	2800	-	
										40	1095	1430	1740	1905	2020	2215	2410	2605	2800	2800	-
										30	1170	1530	1860	2040	2160	2370	2580	2790	3000	-	
10	1305	1640	2020	2395	2775	2860	3195	3530	3865	4200											
340/85 R 48 (13.6 R 48)	152 A8/B	W 12	W 11	353	1797	855	5572	875	STD	bar											
										km/h											
										0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4		
										50	1385	1815	2205	2415	2560	2805	3055	3305	3550	-	
										40	1385	1815	2205	2415	2560	2805	3055	3305	3550	3550	-
										30	1485	1940	2360	2585	2740	3005	3270	3535	3800	-	
10	1655	2080	2560	3040	3515	3625	4050	4475	4900	5325											
52" 300/95 R 52 (12.4 R 52)	151 A8/B	W 9	W 10; W 11; DW 10; DW 11	295	1891	889	5822	925	STD	bar											
										km/h											
										0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4		
										50	1350	1760	2140	2350	2485	2730	2970	3210	3450	-	
										40	1350	1760	2140	2350	2485	2730	2970	3210	3450	3450	-
										30	1445	1885	2295	2515	2665	2920	3180	3440	3695	-	
10	1605	2020	2485	2950	3420	3520	3935	4350	4765	5175											
54" 270/95 R 54 (11.2 R 54)	146 A8/B	W 9	W 8; W 10	275	1885	878	5815	925	STD	bar											
										km/h											
										0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4		
										50	1170	1530	1860	2040	2160	2370	2580	2790	3000	-	
										40	1170	1530	1860	2040	2160	2370	2580	2790	3000	3000	-
										30	1255	1640	1995	2185	2315	2540	2765	2990	3210	-	
10	1395	1755	2160	2565	2970	3060	3420	3780	4140	4500											

STD: Standard



MAIN APPLICATION:
TRACTOR



AGRIMAX ELOS (R-2)

RADIAL MARSHLAND TIRES

AGRIMAX ELOS has been designed to enhance top traction performance even under particularly awkward operating conditions on wet terrains such as paddy fields or marshland. The tread design has been especially developed to ensure optimum self-cleaning properties, which are essential for operations on muddy land and during transfers. To optimize the farmers' productivity reducing machine downtime, sidewall protectors have been integrated into the design of the AGRIMAX ELOS tire to ensure maximum protection against possible damages at any time.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)						
		Rec.	Alt.							↓						
28" 420/85 R 28 (16.9 R 28)	139 A8/B	W 15 L	W 13; W 14 L	438	1467	665	4349	700	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6
										km/h						
										50	1340	1560	1775	1995	2215	2430
										40	1340	1560	1775	1995	2215	2430
										30	1435	1670	1905	2140	2375	2605
										10 LT	1795	2090	2380	2675	2970	3260
										10 HT	1435	1670	1905	2140	2375	2605
										38" 340/85 R 38 (13.6 R 38)	133 A8/B	W 12	W 11	353	1602	735
km/h																
50	1135	1320	1505	1690	1875	2060										
40	1135	1320	1505	1690	1875	2060										
30	1215	1415	1610	1810	2010	2205										
10 LT	1525	1770	2020	2270	2520	2765										
10 HT	1215	1415	1610	1810	2010	2205										
38" 380/85 R 38 (14.9 R 38)	139 A8/B	W 12	W 11; W 13	380	1662	772	4994	775	STD							
										km/h						
										50	1340	1560	1775	1995	2215	2430
										40	1340	1560	1775	1995	2215	2430
										30	1435	1670	1905	2140	2375	2605
										10 LT	1795	2090	2380	2675	2970	3260
										10 HT	1435	1670	1905	2140	2375	2605
										38" 420/85 R 38 (16.9 R 38)	144 A8/B	W 15 L	W 13; W 14 L	438	1735	784
km/h																
50	1540	1795	2045	2300	2550	2800										
40	1540	1795	2045	2300	2550	2800										
30	1650	1920	2190	2460	2730	3000										
10 LT	2070	2405	2745	3080	3420	3755										
10 HT	1650	1920	2190	2460	2730	3000										

STD: Standard



MAIN APPLICATION:
TRACTOR



AGRIMAX ELOS (R-2)

RADIAL MARSHLAND TIRES

AGRIMAX ELOS has been designed to enhance top traction performance even under particularly awkward operating conditions on wet terrains such as paddy fields or marshland. The tread design has been especially developed to ensure optimum self-cleaning properties, which are essential for operations on muddy land and during transfers. To optimize the farmers' productivity reducing machine downtime, sidewall protectors have been integrated into the design of the AGRIMAX ELOS tire to ensure maximum protection against possible damages at any time.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)							
		Rec.	Alt.							↓							
42" 480/80 R 42 (18.4 R 42)	151 A8/B	DW 16 L	DD 16 L; W 16 L	489	1890	857	5600	875	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	
										km/h	50	1900	2210	2520	2830	3140	3450
										40	1900	2210	2520	2830	3140	3450	
										30	2035	2365	2700	3030	3365	3695	
										10 LT	2545	2960	3380	3795	4210	4625	
										10 HT	2035	2365	2700	3030	3365	3695	
										bar	0.6	0.8	1.0	1.2	1.4	1.6	
km/h	50	2270	2640	3015	3385	3755	4125										
40	2270	2640	3015	3385	3755	4125											
30	2430	2830	3225	3625	4020	4415											
10 LT	3045	3540	4040	4535	5035	5530											
10 HT	2430	2830	3225	3625	4020	4415											

STD: Standard



MAIN APPLICATION:
TRACTOR



RT 851 (R-1)

RT 851 is a R-1 tire specially engineered for tractors in grassland applications. The special rounded lug design has been developed to reduce any damage to grassland and emerging crops as well as soil compaction. The strong nylon casing with rugged polyester belts provides long-lasting durability as well as an extended service life. RT 851 also shows excellent self-cleaning properties.



REDUCED SOIL
COMPACTION



SELF-CLEANING



DURABILITY

SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)							
		Rec.	Alt.							↓							
											bar	0.6	0.8	1.0	1.2	1.4	1.6
20" 14.9L R 20 (375/75 R 20)	119 A8/B	W 13	W 14	378	1100	498	3286	525	STD	km/h	50	750	875	995	1120	1240	1360
										40	750	875	995	1120	1240	1360	
										30	805	935	1070	1200	1330	1460	
										10 LT	1005	1170	1335	1500	1665	1825	
										10 HT	805	935	1070	1200	1330	1460	

STD: Standard



RT 853 (R-1)

RT 853 is an entry level R1 tire for tractors and vineyard harvesters in soil tillage and vineyard harvesting applications.



COMFORT



DURABILITY



SELF-CLEANING



TRACTION

SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)							
		Rec.	Alt.							↓							
											bar	0.6	0.8	1.0	1.2	1.4	1.6
38" 480/80 R 38 (18.4 R 38)	149 A8/B	W 16 L	W 15 L; W 14 L	475	1747	781	5256	825	STD	km/h	50	1790	2080	2375	2665	2960	3250
										40	1790	2080	2375	2665	2960	3250	
										30	1915	2230	2545	2855	3170	3480	
										10 LT	2400	2790	3180	3575	3965	4355	
										10 HT	1915	2230	2545	2855	3170	3480	

											bar	0.6	0.8	1.0	1.2	1.4	1.6
520/85 R 38 (20.8 R 38)	155 A8/B	DW 16 L	DW 18 L; DD 16 L	516	1849	830	5592	875	STD	km/h	50	2135	2480	2830	3180	3530	3875
										40	2135	2480	2830	3180	3530	3875	
										30	2285	2660	3030	3405	3780	4150	
										10 LT	2860	3325	3795	4260	4730	5195	
										10 HT	2285	2660	3030	3405	3780	4150	

STD: Standard



MAIN APPLICATION:
TRACTOR



RT 857 (R-1)

RT 857 is a road-oriented tire for haulage operations as well as for soil tillage and vineyard harvesting applications. Its strong casing along with polyester belts offers excellent driving comfort and puncture resistance. Its stubble-resistant tread compound features high cut and chip resistance.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)							
		Rec.	Alt.							↓							
											bar	0.6	0.8	1.0	1.2	1.4	1.6
24" 320/85 R 24 (12.4 R 24)	122 A8/B	W 11	W 10 ; W 9	329	1154	528	3449	550	STD	km/h	0.6	0.8	1.0	1.2	1.4	1.6	
										50	825	960	1095	1230	1365	1500	
										40	825	960	1095	1230	1365	1500	
										30	885	1030	1175	1320	1465	1605	
										10 LT	1110	1290	1470	1650	1830	2010	
										10 HT	885	1030	1175	1320	1465	1605	
26" 420/85 R 26 (16.9 R 26)	138 A8/B	DW 15 L	W 14 L ; W 15 L ; W 16 L ; DW 16 L	438	1374	616	4115	650	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	
										km/h	0.6	0.8	1.0	1.2	1.4	1.6	
										50	1300	1515	1725	1940	2150	2360	
										40	1300	1515	1725	1940	2150	2360	
										30	1395	1620	1850	2075	2305	2530	
										10 LT	1745	2030	2315	2600	2885	3165	
460/85 R 26 (18.4 R 26)	143 A8/B	DW 15 L	W 15 L ; W 16 L ; DW 16 L	465	1442	642	4297	675	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	
										km/h	0.6	0.8	1.0	1.2	1.4	1.6	
										50	1500	1745	1990	2235	2480	2725	
										40	1500	1745	1990	2235	2480	2725	
										30	1610	1870	2135	2395	2660	2920	
										10 LT	2015	2340	2670	3000	3330	3655	
28" 320/85 R 28 (12.4 R 28)	124 A8/B	W 11	W 9 ; W 10	329	1255	577	3779	600	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	
										km/h	0.6	0.8	1.0	1.2	1.4	1.6	
										50	880	1025	1170	1315	1460	1600	
										40	880	1025	1170	1315	1460	1600	
										30	945	1100	1255	1410	1565	1715	
										10 LT	1180	1375	1570	1760	1955	2145	
340/85 R 28 (13.6 R 28)	127 A8/B	W 12	W 11	353	1289	599	3908	625	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	
										km/h	0.6	0.8	1.0	1.2	1.4	1.6	
										50	965	1120	1280	1435	1595	1750	
										40	965	1120	1280	1435	1595	1750	
										30	1035	1200	1370	1540	1710	1875	
										10 LT	1290	1505	1715	1925	2135	2345	
10 HT	1035	1200	1370	1540	1710	1875											

STD: Standard



MAIN APPLICATION:
TRACTOR



RT 857 (R-1)

RT 857 is a road-oriented tire for haulage operations as well as for soil tillage and vineyard harvesting applications. Its strong casing along with polyester belts offers excellent driving comfort and puncture resistance. Its stubble-resistant tread compound features high cut and chip resistance.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)											
		Rec.	Alt.							↓											
											bar	0.6	0.8	1.0	1.2	1.4	1.6				
28" 380/85 R 28 (14.9 R 28)	133 A8/B	W 12	W 11; W 13	390	1357	617	4127	650	STD	km/h	50	40	30	10 LT	10 HT	1135	1320	1505	1690	1875	2060
										50	40	30	10 LT	10 HT	1135	1320	1505	1690	1875	2060	
										40	30	10 LT	10 HT	1215	1415	1610	1810	2010	2205		
										10 LT	10 HT	1525	1770	2020	2270	2520	2765				
										10 HT	1215	1415	1610	1810	2010	2205					
										10 HT	1215	1415	1610	1810	2010	2205					
420/85 R 28 (16.9 R 28)	139 A8/B	W 15 L	W 14 L; W 13	450	1425	640	4276	675	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6					
										km/h	50	40	30	10 LT	10 HT	1340	1560	1775	1995	2215	2430
										50	40	30	10 LT	10 HT	1340	1560	1775	1995	2215	2430	
										40	30	10 LT	10 HT	1435	1670	1905	2140	2375	2605		
										10 LT	10 HT	1795	2090	2380	2675	2970	3260				
										10 HT	1435	1670	1905	2140	2375	2605					
30" 420/85 R 30 (16.9 R 30)	140 A8/B	W 15 L	W 14 L; W 13	438	1476	656	4398	700	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6					
										km/h	50	40	30	10 LT	10 HT	1375	1600	1825	2050	2275	2500
										50	40	30	10 LT	10 HT	1375	1600	1825	2050	2275	2500	
										40	30	10 LT	10 HT	1475	1715	1955	2195	2435	2675		
										10 LT	10 HT	1845	2145	2450	2750	3050	3350				
										10 HT	1475	1715	1955	2195	2435	2675					
460/85 R 30 (18.4 R 30)	145 A8/B	W 16 L	W 15 L; W 14 L	475	1544	682	4601	725	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6					
										km/h	50	40	30	10 LT	10 HT	1595	1860	2120	2380	2640	2900
										50	40	30	10 LT	10 HT	1595	1860	2120	2380	2640	2900	
										40	30	10 LT	10 HT	1710	1990	2270	2550	2830	3105		
										10 LT	10 HT	2140	2490	2840	3190	3540	3890				
										10 HT	1710	1990	2270	2550	2830	3105					

STD: Standard



MAIN APPLICATION:
TRACTOR



RIDEMAX IT 696

RADIAL TRANSPORT TIRES

RIDEMAX IT 696 has a unique tread design that provides excellent grip for road applications, even in winter conditions. It is best suitable for transport and municipality/maintenance applications also thanks to its high-speed feature. The tread design has been specially developed to ensure excellent self-cleaning properties and a low rolling resistance.



ROAD ORIENTED

DURABILITY

HIGH SPEED

SELF-CLEANING

ALL SEASON

TRACTION

FUEL ECONOMY

HEAVY DUTY SERVICE

SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)																		
		Rec.	Alt.							↓																		
18"	340/80 R 18 138 D/143 A8	11; 11 SDC; W 11	W 10; 12; 12 SDC	343	1001	458	2980	475	STD	bar	1.2	1.6	2.0	2.4	2.8	3.2	3.5	4.0										
										km/h	65	920	1135	1345	1535	1745	1960	2100	2360									
										50	995	1225	1455	1660	1885	2115	2270	2550										
										40	1065	1310	1555	1770	2015	2260	2425	2725										
										30	1275	1570	1865	2125	2420	2715	2910	3270										
										24"	300/80 R 24 (11.2 R 24)	DW 10	-	295	1090	501	3296	525	STD	bar	1.2	1.6	2.0	2.4	2.8	3.2		
																				km/h	65	845	1045	1225	1420	1600	1800	
50	910	1125	1320	1535	1725	1940																						
40	970	1195	1400	1625	1835	2060																						
30	1010	1245	1460	1700	1915	2150																						
24"	340/80 R 24 (12.4 R 24)	DW 11	W 10; W 12; DW 10	343	1154	521	3444	550	STD											bar	1.2	1.6	2.0	2.4	2.8	3.2		
																				km/h	65	1025	1265	1480	1720	1940	2180	
										50	1105	1365	1600	1855	2090	2350												
										40	1175	1450	1700	1975	2225	2500												
										30	1220	1510	1770	2055	2315	2600												
										24"	400/80 R 24 (14.9 R 24)	DW 13	W 12; W 14 L	404	1250	558	3760	600	STD	bar	1.2	1.6	2.0	2.4	2.8	3.2		
																				km/h	65	1315	1625	1905	2210	2490	2800	
50	1440	1775	2080	2415	2725	3060																						
40	1530	1885	2210	2570	2895	3250																						
30	1590	1960	2300	2670	3010	3380																						
28"	400/80 R 28 (14.9 R 28)	W 13	W 12; W 14 L	404	1352	615	4048	650	STD											bar	1.2	1.6	2.0	2.4	2.8	3.2		
																				km/h	65	1410	1740	2040	2370	2670	3000	
										50	1530	1890	2215	2575	2900	3260												
										40	1620	2000	2345	2725	3070	3450												
										30	1690	2090	2450	2845	3205	3600												
										28"	440/80 R 28 (16.9 R 28)	W 14 L	W 15 L	441	1415	634	4248	675	STD	bar	1.2	1.6	2.0	2.4	2.8	3.2		
																				km/h	65	1620	2000	2345	2725	3070	3450	
50	1765	2180	2555	2970	3345	3760																						
40	1880	2320	2720	3160	3560	4000																						
30	1955	2415	2830	3285	3700	4160																						

STD: Standard



MAIN APPLICATION:
TRACTOR



RIDEMAX IT 696

RADIAL TRANSPORT TIRES

RIDEMAX IT 696 has a unique tread design that provides excellent grip for road applications, even in winter conditions. It is best suitable for transport and municipality/maintenance applications also thanks to its high-speed feature. The tread design has been specially developed to ensure excellent self-cleaning properties and a low rolling resistance.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)						
		Rec.	Alt.							↓						
30" 440/80 R 30 (16.9 R 30)	157 A8/153 D	W 14 L	W 15 L	441	1466	668	4456	700	STD	bar	1.2	1.6	2.0	2.4	2.8	3.2
										km/h	1715	2115	2480	2885	3250	3650
										65	1825	2250	2640	3065	3455	3880
										50	1940	2395	2805	3260	3670	4125
										40	2020	2495	2925	3395	3825	4300
										30	2020	2495	2925	3395	3825	4300
										bar	1.2	1.6	2.0	2.4	2.8	3.2
km/h	1940	2395	2805	3260	3670	4125										
65	2105	2600	3045	3540	3985	4480										
50	2235	2755	3230	3755	4230	4750										
40	2320	2865	3360	3905	4395	4940										
30	2320	2865	3360	3905	4395	4940										
34" 440/80 R 34 (16.9 R 34)	159 A8/155 D	W 14 L	W 15 L	441	1567	704	4714	750	STD	bar	1.2	1.6	2.0	2.4	2.8	3.2
										km/h	1820	2250	2635	3060	3450	3875
										65	1935	2390	2800	3255	3665	4120
										50	2055	2540	2975	3455	3895	4375
										40	2145	2645	3100	3600	4060	4560
										30	2145	2645	3100	3600	4060	4560
										bar	1.2	1.6	2.0	2.4	2.8	3.2
km/h	2055	2540	2975	3455	3895	4375										
65	2210	2725	3195	3715	4185	4700										
50	2350	2900	3400	3950	4450	5000										
40	2445	3015	3535	4110	4630	5200										
30	2445	3015	3535	4110	4630	5200										
38" 480/80 R 38 (18.4 R 38)	166 A8/161 D	W 15 L	W 16 L	479	1733	780	5213	825	STD	bar	1.2	1.6	2.0	2.4	2.8	3.2
										km/h	2175	2685	3145	3655	4115	4625
										65	2350	2900	3400	3950	4450	5000
										50	2490	3075	3605	4185	4715	5300
										40	2595	3200	3755	4360	4915	5520
										30	2595	3200	3755	4360	4915	5520
										bar	1.2	1.6	2.0	2.4	2.8	3.2
km/h	2175	2685	3145	3655	4115	4625										
65	2350	2900	3400	3950	4450	5000										
50	2490	3075	3605	4185	4715	5300										
40	2595	3200	3755	4360	4915	5520										
30	2595	3200	3755	4360	4915	5520										

STD: Standard



MAIN APPLICATION:
TRACTOR



RIDEMAX IT 697 (M+S)

RADIAL TRANSPORT TIRES

RIDEMAX IT 697 M+S represents the best response to the needs of modern farming contractors during winter operations. This winter tire for tractors ensures perfect grip for all operations on icy and snowy land without the need of snow chains being mounted. Thanks to the tread grooves and the special mix, a tractor can be driven in full stability, comfort and with maximum control at low temperatures even on roads that are both difficult and dangerous due to snow and ice.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)							
		Rec.	Alt.							↓							
30"	540/65 R 30	161 A8/156 D	W 16 L	W 18	530	1464	661	4434	700	STD	bar	1.2	1.6	2.0	2.4	2.8	3.2
											km/h	65	50	40	30		
												1880	2320	2720	3160	3560	4000
												2030	2505	2940	3415	3845	4320
												2175	2685	3145	3655	4115	4625
												2255	2785	3265	3790	4270	4800
42"	650/65 R 42	171 D/176 A8	DW 20 B	-	645	1920	880	5869	925	STD	bar	1.2	1.6	2.0	2.4	2.8	3.2
											km/h	65	50	40	30		
												2890	3565	4180	4860	5475	6150
												3125	3855	4520	5250	5915	6645
												3335	4120	4830	5610	6320	7100
												3470	4280	5020	5830	6570	7380

STD: Standard



MAIN APPLICATION:
TRACTOR



TR 126 (R-1)

TR 126 is designed to fit small tractors in soil tillage operations and is particularly suitable on muddy ground. The deep lugs and the tread pattern provide excellent traction and outstanding self-cleaning features providing best tire performance in all operating conditions.



TRACTION



SUITABLE FOR
MUDDY GROUND



SELF-CLEANING

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
14" 6 - 14	5 JA; 5 KB	-	157	655	305	1978	STD	4	TT	66 A6	1.90	300
6 - 14	5 JA; 5 KB	-	157	655	305	1978	STD	4	TL	66 A6	1.90	300
7 - 14	5 JA; 5 KB	-	170	690	320	2070	STD	4	TL	72 A6	1.60	355
7 - 14	5 JA; 5 KB	-	170	690	320	2070	STD	4	TT	72 A6	1.60	355

STD: Standard



MAIN APPLICATION:
TRACTOR



TR 128

TR 128 has been specially designed for utility tractors and rototillers. The wide and deep lug design provides an extended tire service life. TR 128 features maximum traction on wet soil as well as superior self-cleaning properties and a strong nylon casing.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
12" 5.00 - 12	4 JA	-	127	545	256	1667	STD	4	TT	-	2.40	220
6.00 - 12	4.00 E	4.00 E DT	160	635	293	1900	STD	4	TT	-	1.80	325
6.00 - 12	4.00 E	4.00 E DT	160	635	293	1900	STD	6	TT	-	2.60	400
14" 7-14	5 JA	5 J	173	690	-	-	STD	8	TT	-	4.00	685

STD: Standard



TR 133 (R-1)

TR 133 has been specially designed for harvesters, tractors, sprayers and trailers in harvesting, soil tillage and spraying applications. It features excellent traction and outstanding comfort as well as enhanced self-cleaning properties. TR 133 provides an extended tire life-cycle.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
38" 13.6 - 38 (14.00 - 38)	W 12	W 11	350	1580	735	4843	STD	10	TT	136 A6	2.50	2240

STD: Standard



MAIN APPLICATION:
TRACTOR



TR 135 (R-1)

TR 135 is best suitable for soil tillage and spraying applications. Some sizes and versions are also suitable for excavators, trailers and harvesters. Traction, self-cleaning properties and stability are key features which make the TR 135 tire the ideal partner even on the most difficult ground conditions.



TRACTION

STABILITY

SELF-CLEANING

COMFORT

CUT & CHIP RESISTANCE

DURABILITY

HEAVY DUTY SERVICE

SPECIAL COMPOUND

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
20" 8.00 - 20	5.50 F	-	225	965	448	2837	STD	6	TT	105 A6	2.10	925
8.00 - 20	5.50 F	-	225	965	448	2837	STD	8	TT	111 A6	2.80	1090
9.5 - 20	W 8	W 7	240	955	444	2808	STD	6	TT	102 A6	2.20	850
9.5 - 20	W 8	W 7	240	955	444	2808	STD	8	TT	107 A6	2.80	975
9.5 - 20	W 8	W 7	240	955	444	2808	HD	8	TT	107 A6	2.80	975
10.00 - 20	7.5	-	280	1075	495	3160	STD	10	TT	152 A2	4.80	3550
11.2 - 20	W 10	W 9; 9	292	1020	477	3000	STD	8	TT	111 A6	2.40	1090
12.4 - 20	W 11	W 9; 9; W 10; 11	325	1075	500	3160	STD	8	TT	116 A6	2.10	1250
12.4 - 20	W 11	W 9; 9; W 10; 11	325	1075	500	3160	HD	8	TT	116 A6	2.10	1250
24" 8.3 - 24	W 7	W 6	211	995	469	2925	STD	6	TT	100 A6	2.40	800
8.3 - 24	W 7	W 6	211	995	469	2925	STD	8	TT	105 A6	3.10	925
8.3 - 24	W 7	W 6	211	995	469	2925	HD	8	TT	105 A6	3.10	925
9.5 - 24	W 8	W 7	232	1056	494	3217	STD	6	TT	106 A6	2.10	950
9.5 - 24	W 8	W 7	232	1056	494	3217	STD	8	TT	112 A6	2.80	1120
9.5 - 24	W 8	W 7	232	1056	494	3217	HD	8	TT	112 A6	2.80	1120
9.5 - 24	W 8	W 7	232	1056	494	3217	STD	10	TT	116 A6	3.50	1250

STD: Standard
HD: Heavy Duty

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
TRACTOR



TR 135 (R-1)

TR 135 is best suitable for soil tillage and spraying applications. Some sizes and versions are also suitable for excavators, trailers and harvesters. Traction, self-cleaning properties and stability are key features which make the TR 135 tire the ideal partner even on the most difficult ground conditions.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
24" 9.5 - 24	W 8	W 7	232	1056	494	3217	HD	10	TT	116 A6	3.50	1250
11.2 - 24	W 10	W 9	284	1105	515	3249	STD	6	TT	110 A6	1.80	1060
11.2 - 24	W 10	W 9	284	1105	515	3249	STD	8	TT	116 A6	2.40	1250
11.2 - 24	W 10	W 9	284	1105	515	3249	STD	8	TL	116 A6	2.40	1250
11.2 - 24	W 10	W 9	284	1105	515	3249	HD	8	TT	116 A6	2.40	1250
11.2 - 24	W 10	W 9	284	1105	515	3249	HD	10	TT	120 A6	3.00	1400
12.4 - 24	W 11	W 9; W 10	315	1160	535	3524	STD	6	TT	115 A6	1.70	1215
12.4 - 24	W 11	W 9; W 10	315	1160	535	3524	STD	8	TT	121 A6	2.30	1450
12.4 - 24	W 11	W 9; W 10	315	1160	535	3524	STD	8	TL	121 A6	2.30	1450
12.4 - 24	W 11	W 9; W 10	315	1160	535	3524	HD	8	TT	121 A6	2.30	1450
12.4 - 24	W 11	W 9; W 10	315	1160	535	3524	HD	8	TL	121 A6	2.30	1450
12.4 - 24	W 11	W 9; W 10	315	1160	535	3524	STD	10	TT	125 A6	2.90	1650
12.4 - 24	W 11	W 9; W 10	315	1160	535	3524	STD	12	TT	128 A6	3.50	1800
12.4 - 24	W 11	W 9; W 10	315	1160	535	3524	SPL	12	TT	128 A6	3.50	1800
13.6 - 24	W 12	W 11	345	1210	560	3557	STD	8	TT	123 A6	2.00	1550

STD: Standard
HD: Heavy Duty
SPL: Special



**MAIN APPLICATION:
TRACTOR**



TR 135 (R-1)

TR 135 is best suitable for soil tillage and spraying applications. Some sizes and versions are also suitable for excavators, trailers and harvesters. Traction, self-cleaning properties and stability are key features which make the TR 135 tire the ideal partner even on the most difficult ground conditions.



TRACTION

STABILITY

SELF-CLEANING

COMFORT

CUT & CHIP RESISTANCE

DURABILITY

HEAVY DUTY SERVICE

SPECIAL COMPOUND

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
24" 13.6 - 24	W 12	W 11	345	1210	560	3557	STD	8	TL	123 A6	2.00	1550
13.6 - 24	W 12	W 11	345	1210	560	3557	HD	8	TT	123 A6	2.00	1550
13.6 - 24	W 12	W 11	345	1210	560	3557	STD	12	TT	130 A6	2.90	1900
14.9 - 24	W 13	W 12; W 11	378	1265	583	3719	STD	8	TT	128 A6	1.80	1800
14.9 - 24	W 13	W 12; W 11	378	1265	583	3719	STD	8	TL	128 A6	1.80	1800
14.9 - 24	W 13	W 11; W 12	378	1265	583	3719	HD	8	TT	128 A6	1.80	1800
14.9 - 24	W 13	W 11; W 12	378	1265	583	3719	HD	10	TL	132 A6	2.30	2000
14.9 - 24	W 13	W 12; W 11	378	1265	583	3719	STD	12	TT	135 A6	2.60	2180
14.9 - 24	W 13	W 12; W 11	378	1265	583	3719	STD	12	TL	135 A6	2.60	2180
16.9 - 24	W 15 L	W 14 L	429	1335	613	3925	STD	8	TT	133 A6	1.70	2060
16.9 - 24	W 15 L	W 14 L	429	1335	613	3925	HD	8	TT	133 A6	1.70	2060
16.9 - 24	W 15 L	W 14 L	429	1335	613	3925	STD	10	TT	136 A6	2.00	2240
16.9 - 24	W 15 L	W 14 L	429	1335	613	3925	HD	12	TT	140 A6	2.40	2500
26" 14.9 - 26	W 13	W 11; W 12	375	1315	608	3863	STD	8	TT	129 A6	1.80	1850
14.9 - 26	W 13	W 11; W 12	375	1315	608	3863	HD	8	TT	129 A6	1.80	1850

STD: Standard
HD: Heavy Duty



MAIN APPLICATION:
TRACTOR



TR 135 (R-1)

TR 135 is best suitable for soil tillage and spraying applications. Some sizes and versions are also suitable for excavators, trailers and harvesters. Traction, self-cleaning properties and stability are key features which make the TR 135 tire the ideal partner even on the most difficult ground conditions.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
26" 14.9 - 26	W 13	W 11; W 12	375	1315	608	3863	STD	12	TT	136 A6	2.70	2240
16.9 - 26	W 15 L	W 14 L	430	1380	636	4054	STD	10	TT	137 A6	2.00	2300
16.9 - 26	W 15 L	W 14 L	430	1380	636	4054	STD	12	TT	140 A6	2.30	2500
23.1 - 26	DW 20 B; DW 20 A	-	587	1585	700	4615	STD	12	TL	153 A6	1.70	3650
23.1 - 26	DW 20 B; DW 20 A	-	587	1585	700	4615	STD	12	TT	153 A6	1.70	3650
23.1 - 26	DW 20 B; DW 20 A	-	587	1585	700	4615	DB	12	TL	153 A6	1.70	3650
23.1 - 26	DW 20 B; DW 20 A	-	587	1585	700	4615	STD	14	TL	156 A6	2.00	4000
23.1 - 26	DW 20 B; DW 20 A	-	587	1585	700	4615	STD	16	TL	159 A6	2.30	4375
23.1 - 26	DW 20 B; DW 20 A	-	587	1585	700	4615	STD	16	TT	159 A6	2.30	4375
23.1 - 26	DW 20 B; DW 20 A	-	587	1585	700	4615	HD	16	TT	159 A6	2.30	4375
23.1 - 26	DW 20 B; DW 20 A	-	587	1585	700	4615	DB	16	TL	159 A6	2.30	4375
23.1 - 26	DW 20 B; DW 20 A	-	587	1585	700	4615	DB HD	16	TL	159 A6	2.30	4375
23.1 - 26	DW 20 B; DW 20 A	-	587	1585	700	4615	DB	18	TT	161 A6	2.60	4625
28" 8.3 - 28	W 7	W 6	213	1104	523	3246	STD	6	TT	103 A6	2.40	875
8.3 - 28	W 7	W 6	213	1104	523	3246	STD	8	TT	108 A6	3.20	1000
9.5 - 28	W 8	W 7	235	1155	542	3381	STD	6	TT	108 A6	2.10	1000

DB: Dual Bead Version
DB HD: Dual Bead Heavy Duty

HD: Heavy Duty
STD: Standard



**MAIN APPLICATION:
TRACTOR**



TR 135 (R-1)

TR 135 is best suitable for soil tillage and spraying applications. Some sizes and versions are also suitable for excavators, trailers and harvesters. Traction, self-cleaning properties and stability are key features which make the TR 135 tire the ideal partner even on the most difficult ground conditions.



TRACTION

STABILITY

SELF-CLEANING

COMFORT

CUT & CHIP RESISTANCE

DURABILITY

HEAVY DUTY SERVICE

SPECIAL COMPOUND

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
28" 9.5 - 28	W 8	W 7	235	1155	542	3381	STD	8	TT	114 A6	2.80	1180
11.2 - 28	W 10	W 9	284	1205	565	3543	STD	8	TT	118 A6	2.40	1320
11.2 - 28	W 10	W 9	284	1205	565	3543	HD	8	TT	118 A6	2.40	1320
11.2 - 28	W 10	W 9	284	1205	565	3543	STD	10	TT	122 A6	3.00	1500
12.4 - 28	W 11	W 9; W 10	325	1260	589	3704	STD	6	TT	117 A6	1.70	1285
12.4 - 28	W 11	W 9; W 10	325	1260	589	3704	STD	8	TT	123 A6	2.30	1550
12.4 - 28	W 11	W 9; W 10	325	1260	589	3704	HD	8	TT	123 A6	2.30	1550
12.4 - 28	W 11	W 9; W 10	325	1260	589	3704	STD	10	TT	127 A6	2.90	1750
12.4 - 28	W 11	W 9; W 10	325	1260	589	3704	STD	12	TT	131 A6	3.50	1950
13.6 - 28	W 12	W 11	345	1310	614	4031	STD	8	TT	125 A6	2.00	1650
13.6 - 28	W 12	W 11	345	1310	614	4031	HD	8	TT	125 A6	2.00	1650
13.6 - 28	W 12	W 11	345	1310	614	4031	STD	12	TT	134 A6	3.00	2120
13.6 - 28	W 12	W 11	345	1310	614	4031	STD	14	TT	137 A6	3.50	2300
14.9 - 28	W 13	W 11; W 12	378	1365	634	4013	STD	6	TT	125 A6	1.40	1650
14.9 - 28	W 13	W 11; W 12	378	1365	634	4013	STD	8	TT	130 A6	1.80	1900
14.9 - 28	W 13	W 11; W 12	378	1365	634	4013	STD	8	TL	130 A6	1.80	1900

STD: Standard
HD: Heavy Duty

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
TRACTOR



TR 135 (R-1)

TR 135 is best suitable for soil tillage and spraying applications. Some sizes and versions are also suitable for excavators, trailers and harvesters. Traction, self-cleaning properties and stability are key features which make the TR 135 tire the ideal partner even on the most difficult ground conditions.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
28" 14.9 - 28	W 13	W 11; W 12	378	1365	634	4013	HD	8	TT	130 A6	1.80	1900
14.9 - 28	W 13	W 11; W 12	378	1365	634	4013	STD	12	TT	137 A6	2.60	2300
14.9 - 28	W 13	W 11; W 12	378	1365	634	4013	HD	12	TT	137 A6	2.60	2300
14.9 - 28	W 13	W 11; W 12	378	1365	634	4013	STD	14	TT	139 A6	2.90	2430
18.4 - 28	W 16 L	W 15 L	467	1501	691	4413	STD	8	TL	138 A6	1.70	2360
18.4 - 28	W 16 L	W 15 L	467	1501	691	4413	STD	12	TL	147 A6	2.50	3075
30" 7.2 - 30	W 6	-	185	1095	523	3219	STD	6	TT	95 A6	2.30	690
9.5 - 30	W 8	W 7	241	1200	567	3528	STD	6	TT	109 A6	2.10	1030
9.5 - 30	W 8	W 7	241	1200	567	3528	STD	8	TT	115 A6	2.80	1215
14.9 - 30	W 13	W 11; W 12	378	1415	659	4316	STD	8	TT	131 A6	1.80	1950
15 - 30 (18.4 - 30)	W 16 L	W 15 L	460	1545	714	4542	STD	12	TT	149 A6	2.30	3250
15 - 30 (18.4 - 30)	W 16 L	W 15 L	460	1545	714	4542	STD	14	TT	151 A6	2.60	3450
16.9 - 30 (14 - 30)	W 15 L	W 14 L	429	1485	687	4501	STD	8	TT	137 A6	1.70	2300
16.9 - 30 (14 - 30)	W 15 L	W 14 L	429	1485	687	4501	STD	10	TT	139 A6	2.00	2430
16.9 - 30 (14 - 30)	W 15 L	W 14 L	429	1485	687	4501	STD	14	TT	146 A6	2.80	3000
18.4 - 30 (15 - 30)	W 16 L	W 15 L	460	1545	707	4741	STD	8	TT	139 A6	1.40	2430

STD: Standard
HD: Heavy Duty



**MAIN APPLICATION:
TRACTOR**



TR 135 (R-1)

TR 135 is best suitable for soil tillage and spraying applications. Some sizes and versions are also suitable for excavators, trailers and harvesters. Traction, self-cleaning properties and stability are key features which make the TR 135 tire the ideal partner even on the most difficult ground conditions.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
30" 18.4 - 30 (15 - 30)	W 16 L	W 15 L	460	1545	707	4741	HD	8	TT	139 A6	1.40	2430
18.4 - 30 (15 - 30)	W 16 L	W 15 L	460	1545	707	4741	STD	10	TT	145 A6	1.80	2900
18.4 - 30 (15 - 30)	W 16 L	W 15 L	460	1545	707	4741	HD	10	TT	145 A6	1.80	2900
18.4 - 30 (15 - 30)	W 16 L	W 15 L	460	1545	707	4741	HD	10	TL	145 A6	1.80	2900
18.4 - 30 (15 - 30)	W 16 L	W 15 L	460	1545	707	4741	STD	12	TT	149 A6	2.30	3250
18.4 - 30 (15 - 30)	W 16 L	W 15 L	460	1545	707	4741	STD	12	TL	149 A6	2.30	3250
18.4 - 30 (15 - 30)	W 16 L	W 15 L	460	1545	707	4741	HD	12	TT	149 A6	2.30	3250
18.4 - 30 (15 - 30)	W 16 L	W 15 L	460	1545	707	4741	STD	14	TT	151 A6	2.60	3450
23.1 - 30	DW 20 B; DW 20 A	-	600	1700	780	4998	STD	8	TT	146 A6	1.10	3000
23.1 - 30	DW 20 B; DW 20 A	-	600	1700	780	4998	STD	8	TL	146 A6	1.10	3000
23.1 - 30	DW 20 B; DW 20 A	-	600	1700	780	4998	STD	12	TT	155 A6	1.70	3875
23.1 - 30	DW 20 B; DW 20 A	-	600	1700	780	4998	STD	12	TL	155 A6	1.70	3875
23.1 - 30	DW 20 B; DW 20 A	-	600	1700	780	4998	DB	12	TT	155 A6	1.70	3875
23.1 - 30	DW 20 B; DW 20 A	-	600	1700	780	4998	DB	18	TT	164 A6	2.60	5000
23.1 - 30	DW 20 B; DW 20 A	-	600	1700	780	4998	DB	18	TL	164 A6	2.60	5000

HD: Heavy Duty
DB: Dual Bead
STD: Standard



**MAIN APPLICATION:
TRACTOR**



TR 135 (R-1)

TR 135 is best suitable for soil tillage and spraying applications. Some sizes and versions are also suitable for excavators, trailers and harvesters. Traction, self-cleaning properties and stability are key features which make the TR 135 tire the ideal partner even on the most difficult ground conditions.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
32" 8.3 - 32	W 7	W 6	211	1195	572	3585	STD	6	TT	105 A6	2.40	925
8.3 - 32	W 7	W 6	211	1195	572	3585	STD	8	TT	111 A6	3.20	1090
9.5 - 32	W 8	W 7	235	1255	594	3686	STD	6	TT	110 A6	2.10	1060
12.4 - 32	W 11	W 9; W 10	325	1360	639	3998	STD	6	TT	119 A6	1.70	1360
12.4 - 32	W 11	W 9; W 10	325	1360	639	3998	STD	8	TT	124 A6	2.30	1600
12.4 - 32	W 11	W 9; W 10	325	1360	639	3998	HD	8	TT	124 A6	2.30	1600
34" 16.9 - 34	W 15 L	W 14 L	429	1585	738	4660	STD	8	TT	139 A6	1.70	2430
16.9 - 34	W 15 L	W 14 L	429	1585	738	4660	HD	8	TT	139 A6	1.70	2430
16.9 - 34	W 15 L	W 14 L	429	1585	738	4660	STD	10	TT	142 A6	2.00	2650
16.9 - 34	W 15 L	W 14 L	429	1585	738	4660	HD	10	TT	142 A6	2.00	2650
16.9 - 34	W 15 L	W 14 L	429	1585	738	4660	STD	12	TT	144 A6	2.30	2800
16.9 - 34	W 15 L	W 14 L	429	1585	738	4660	HD	12	TT	144 A6	2.30	2800
18.4 - 34	W 16 L	W 15 L	467	1650	766	4851	STD	6	TT	137 A6	1.10	2300
18.4 - 34	W 16 L	W 15 L	467	1650	766	4851	STD	8	TT	142 A6	1.40	2650
18.4 - 34	W 16 L	W 15 L	467	1650	766	4851	HD	8	TT	142 A6	1.40	2650

STD: Standard
HD: Heavy Duty



**MAIN APPLICATION:
TRACTOR**



TR 135 (R-1)

TR 135 is best suitable for soil tillage and spraying applications. Some sizes and versions are also suitable for excavators, trailers and harvesters. Traction, self-cleaning properties and stability are key features which make the TR 135 tire the ideal partner even on the most difficult ground conditions.



TRACTION

STABILITY

SELF-CLEANING

COMFORT

CUT & CHIP RESISTANCE

DURABILITY

HEAVY DUTY SERVICE

SPECIAL COMPOUND

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
34" 18.4 - 34	W 16 L	W 15 L	467	1650	766	4851	STD	10	TT	146 A6	1.80	3000
18.4 - 34	W 16 L	W 15 L	467	1650	766	4851	HD	10	TT	146 A6	1.80	3000
18.4 - 34	W 16 L	W 15 L	467	1650	766	4851	STD	12	TT	151 A6	2.30	3450
18.4 - 34	W 16 L	W 15 L	467	1650	766	4851	HD	12	TT	151 A6	2.30	3450
18.4 - 34	W 16 L	W 15 L	467	1650	766	4851	HD SPL	12	TT	151 A6	2.30	3450
18.4 - 34	W 16 L	W 15 L	467	1650	766	4851	STD	14	TT	154 A6	2.60	3750
18.4 - 34	W 16 L	W 15 L	467	1650	766	4851	HD	14	TT	154 A6	2.60	3750
23.1 - 34	DW 20 B; DW 20 A	-	585	1810	834	5321	STD	10	TT	153 A6	1.40	3650
23.1 - 34	DW 20 B; DW 20 A	-	585	1810	834	5321	STD	10	TL	153 A6	1.40	3650
36" 8.3 - 36	W 7	W 6	211	1295	619	3807	STD	6	TT	107 A6	2.40	975
8.3 - 36	W 7	W 6	211	1295	619	3807	STD	8	TT	113 A6	3.20	1150
9.5 - 36	W 8	W 7	235	1360	646	4000	STD	10	TT	122 A6	3.50	1500
12.4 - 36	W 11	W 9; W 10	325	1465	691	4307	STD	8	TT	126 A6	2.30	1700
12.4 - 36	W 11	W 9; W 10	325	1465	691	4307	HD	8	TT	126 A6	2.30	1700
12.4 - 36	W 11	W 9; W 10	325	1465	691	4307	STD	10	TT	131 A6	2.90	1950

HD: Heavy Duty
HD SPL: Heavy Duty Special
STD: Standard

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
TRACTOR



TR 135 (R-1)

TR 135 is best suitable for soil tillage and spraying applications. Some sizes and versions are also suitable for excavators, trailers and harvesters. Traction, self-cleaning properties and stability are key features which make the TR 135 tire the ideal partner even on the most difficult ground conditions.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
36" 12.4 - 36	W 11	W 9; W 10	325	1465	691	4307	HD	10	TT	131 A6	2.90	1950
12.4 - 36	W 11	W 9; W 10	325	1465	691	4307	STD	12	TT	135 A6	3.50	2180
12.4 - 36	W 11	W 9; W 10	325	1465	691	4307	STD	14	TT	139 A6	4.10	2430
12.4 - 36	W 11	W 9; W 10	325	1465	691	4307	HD	14	TL	139 A6	4.10	2430
12.4 - 36	W 11	W 9; W 10	325	1465	691	4307	HD	14	TT	139 A6	4.10	2430
13.6 - 36	W 12	W 11	345	1515	713	4454	STD	6	TT	125 A6	1.60	1650
13.6 - 36	W 12	W 11	345	1515	713	4454	STD	8	TT	129 A6	2.00	1850
13.6 - 36	W 12	W 11	345	1515	713	4454	STD	10	TT	134 A6	2.50	2120
13.6 - 36	W 12	W 11	345	1515	713	4454	HD	10	TT	134 A6	2.50	2120
38" 12.4 - 38	W 11	W 9; W 10	315	1525	721	4484	STD	8	TT	127 A6	2.30	1750
12.4 - 38	W 11	W 9; W 10	315	1525	721	4484	STD	14	TT	138 A6	3.70	2360
12.4 - 38	W 11	W 9; W 10	315	1525	721	4484	STD	14	TL	138 A6	3.70	2360
13.6 - 38 (14.00 - 38)	W 12	W 11	345	1565	738	4601	STD	8	TT	131 A6	2.00	1950
13.6 - 38 (14.00 - 38)	W 12	W 11	345	1565	738	4601	HD	8	TT	131 A6	2.00	1950
13.6 - 38 (14.00 - 38)	W 12	W 11	345	1565	738	4601	STD	12	TT	139 A6	3.00	2430
13.6 - 38 (14.00 - 38)	W 12	W 11	345	1565	738	4601	HD	12	TT	139 A6	3.00	2430

STD: Standard
HD: Heavy Duty



MAIN APPLICATION:
TRACTOR



TR 135 (R-1)

TR 135 is best suitable for soil tillage and spraying applications. Some sizes and versions are also suitable for excavators, trailers and harvesters. Traction, self-cleaning properties and stability are key features which make the TR 135 tire the ideal partner even on the most difficult ground conditions.



TRACTION

STABILITY

SELF-CLEANING

COMFORT

CUT & CHIP RESISTANCE

DURABILITY

HEAVY DUTY SERVICE

SPECIAL COMPOUND

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
38" 13.6 - 38 (14.00 - 38)	W 12	W 11	345	1565	738	4601	STD	14	TT	142 A6	3.50	2650
14.00 - 38 (13.6 - 38)	W 12	W 11	345	1565	738	4601	STD	8	TT	131 A6	2.00	1950
14.00 - 38 (13.6 - 38)	W 12	W 11	345	1565	738	4601	SPL	12	TT	139 A6	3.00	2430
15.5 - 38	W 14 L	-	395	1585	746	4660	STD	8	TT	133 A6	1.80	2060
15.5 - 38	W 14 L	-	395	1585	746	4660	HD	8	TT	133 A6	1.80	2060
15.5 - 38	W 14 L	-	395	1585	746	4660	STD	10	TT	138 A6	2.30	2360
15.5 - 38	W 14 L	-	395	1585	746	4660	HD	10	TT	138 A6	2.30	2360
15.5 - 38	W 14 L	-	395	1585	746	4660	STD	12	TT	141 A6	2.80	2575
16.9 - 38	W 15 L	W 14 L	429	1685	788	4954	STD	8	TT	141 A6	1.70	2575
16.9 - 38	W 15 L	W 14 L	429	1685	788	4954	HD	8	TT	141 A6	1.70	2575
16.9 - 38	W 15 L	W 14 L	429	1685	788	4954	STD	10	TT	143 A6	2.00	2725
16.9 - 38	W 15 L	W 14 L	429	1685	788	4954	HD	10	TT	143 A6	2.00	2725
16.9 - 38	W 15 L	W 14 L	429	1685	788	4954	STD	12	TT	146 A6	2.30	3000
18.4 - 38	W 16 L	W 15 L	467	1750	816	5145	STD	8	TT	143 A6	1.40	2725
18.4 - 38	W 16 L	W 15 L	467	1750	816	5145	HD	8	TT	143 A6	1.40	2725
18.4 - 38	W 16 L	W 15 L	467	1750	816	5145	HD	10	TT	148 A6	1.80	3150

STD: Standard
SPL: Special
HD: Heavy Duty

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
TRACTOR



TR 135 (R-1)

TR 135 is best suitable for soil tillage and spraying applications. Some sizes and versions are also suitable for excavators, trailers and harvesters. Traction, self-cleaning properties and stability are key features which make the TR 135 tire the ideal partner even on the most difficult ground conditions.



TRACTION

STABILITY

SELF-CLEANING

COMFORT

CUT & CHIP RESISTANCE

DURABILITY

HEAVY DUTY SERVICE

SPECIAL COMPOUND

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
38" 18.4 - 38	W 16 L	W 15 L	467	1750	816	5145	HD	10	TL	148 A6	1.80	3150
18.4 - 38	W 16 L	W 15 L	467	1750	816	5145	STD	12	TT	153 A6	2.30	3650
18.4 - 38	W 16 L	W 15 L	467	1750	816	5145	STD	12	TL	153 A6	2.30	3650
18.4 - 38	W 16 L	W 15 L	467	1750	816	5145	HD	12	TT	153 A6	2.30	3650
20.8 - 38	W 18 L	W 16 L	530	1835	852	5395	STD	8	TT	148 A6	1.30	3150
20.8 - 38	W 18 L	W 16 L	530	1835	852	5395	STD	12	TT	156 A6	2.00	4000
20.8 - 38	W 18 L	W 16 L	530	1835	852	5395	STD	12	TL	156 A6	2.00	4000
20.8 - 38	W 18 L	W 16 L	530	1835	852	5395	HD	12	TT	156 A6	2.00	4000
20.8 - 38	W 18 L	W 16 L	530	1835	852	5395	STD	14	TT	160 A6	2.40	4500
20.8 - 38	W 18 L	W 16 L	530	1835	852	5395	DB HD	16	TT	163 A6	2.80	4875
20.8 - 38	W 18 L	W 16 L	530	1835	852	5395	DB HD	18	TT	166 A6	3.20	5300
42" 9.5 - 42	W 8	W 7	246	1510	722	4440	STD	10	TT	125 A6	3.50	1650
12.4 - 42	W 10; W 10 A	-	322	1630	770	5011	STD	10	TL	134 A6	2.80	2120
20.8 - 42	W 18 L	W 16 L	535	1950	909	5733	STD	12	TT	157 A6	2.00	4125
20.8 - 42	W 18 L	W 16 L	535	1950	909	5733	STD	12	TL	157 A6	2.00	4125

HD: Heavy Duty
DB HD: Dual Bead Heavy Duty
STD: Standard



MAIN APPLICATION:
TRACTOR



TR 136 (R-1)

TR 136 has been developed by BKT to equip tractors and trailers in soil tillage and transport operations. This tire provides improved traction in all working conditions along with best cut and chip resistance to reduce machine downtime and increase your productivity.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.										
26"												
18.4 - 26	W 16 L	W 15 L	480	1450	646	4205	STD	12	TL	146 A6	2.30	3000
18.4 - 26	W 16 L	W 15 L	480	1450	646	4205	STD	12	TT	146 A6	2.30	3000
18.4 - 26	W 16 L	W 15 L	480	1450	646	4205	SPL	12	TL	146 A6	2.30	3000
28"												
12.4 - 28	W 11	W 9; W 10	315	1275	595	3749	STD	8	TT	123 A6	2.30	1550
30"												
16.9 - 30 (14 - 30)	W 15 L	W 14 L	429	1485	687	4501	STD	8	TT	137 A6	1.70	2300
16.9 - 30 (14 - 30)	W 15 L	W 14 L	429	1485	687	4501	HD	8	TT	137 A6	1.70	2300
16.9 - 30 (14 - 30)	W 15 L	W 14 L	429	1485	687	4501	SPL	8	TT	137 A6	1.70	2300
16.9 - 30 (14 - 30)	W 15 L	W 14 L	429	1485	687	4501	STD	10	TT	139 A6	2.00	2430
16.9 - 30 (14 - 30)	W 15 L	W 14 L	429	1485	687	4501	STD	12	TT	143 A6	2.40	2725
16.9 - 30 (14 - 30)	W 15 L	W 14 L	429	1485	687	4501	SPL	12	TT	143 A6	2.40	2725
18.4 - 30 (15 - 30)	W 16 L	W 15 L	465	1545	707	4741	STD	8	TT	139 A6	1.40	2430
18.4 - 30 (15 - 30)	W 16 L	W 15 L	465	1545	707	4741	HD	8	TT	139 A6	1.40	2430
18.4 - 30 (15 - 30)	W 16 L	W 15 L	465	1545	707	4741	HD	12	TT	149 A6	2.30	3250
18.4 - 30 (15 - 30)	W 16 L	W 15 L	465	1545	707	4741	SPL	12	TT	149 A6	2.30	3250
18.4 - 30 (15 - 30)	W 16 L	W 15 L	465	1545	707	4741	HD	14	TT	151 A6	2.60	3450

STD: Standard
HD: Heavy Duty
SPL: Special



MAIN APPLICATION:
TRACTOR



TR 144 (R-1)

TR 144 is suitable to equip small tractors to be used in soil tillage operations. It has been specially designed for wet conditions as you can find on wet and loose soil, and paddy fields. TR 144 ensures outstanding performance in all operating conditions which require both excellent traction and self-cleaning features. TR 144 is also available in a "special" version, which is best suitable for heavy-duty service.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
16" 7 - 16	6 L; 6 LB; 6.00 F	-	183	740	345	2217	STD	4	TT	75 A6	1.60	387
7 - 16	6 L; 6 LB; 6.00 F	-	183	740	345	2217	STD	4	TL	75 A6	1.60	387
7 - 16	6 L; 6 LB; 6.00 F	-	183	740	345	2217	STD	6	TT	84 A6	2.50	500
8 - 16	6 L; 6 LB; 6.00 F	-	200	785	366	2360	STD	4	TT	83 A6	1.20	487
8 - 16	6 L; 6 LB; 6.00 F	-	200	785	366	2360	STD	6	TT	91 A6	1.90	615
8 - 16	6 L; 6 LB; 6.00 F	-	200	785	366	2360	STD	6	TL	91 A6	1.90	615
8 - 16	6 L; 6 LB; 6.00 F	-	200	785	366	2360	SPL	6	TT	91 A6	1.90	615
8 - 16	6 L; 6 LB; 6.00 F	-	200	785	366	2360	STD	8	TT	98 A6	2.60	750
9.5 - 16	W 8 L	8 LB	245	850	392	2542	STD	6	TT	96 A6	2.10	710
9.5 - 16	W 8 L	8 LB	245	850	392	2542	STD	6	TL	96 A6	2.10	710
9.5 - 16	W 8 L	8 L B	245	850	392	2542	STD	8	TT	102 A6	2.80	850
9.5 - 16	W 8 L	8 LB	245	850	392	2542	STD	8	TL	102 A6	2.80	850

STD: Standard
SPL: Special



MAIN APPLICATION:
TRACTOR



TR 144 (R-1)

TR 144 is suitable to equip small tractors to be used in soil tillage operations. It has been specially designed for wet conditions as you can find on wet and loose soil, and paddy fields. TR 144 ensures outstanding performance in all operating conditions which require both excellent traction and self-cleaning features. TR 144 is also available in a "special" version, which is best suitable for heavy-duty service.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
18"												
8 - 18	W 6	W 7; 5.50 F	200	840	391	2520	STD	4	TT	85 A6	1.20	515
8 - 18	W 6	W 7; 5.50 F	200	840	391	2520	STD	6	TT	94 A6	1.90	670
8 - 18	W 6	W 7; 5.50 F	200	840	391	2520	SPL	6	TT	94 A6	1.90	670
8 - 18	W 6	W 7; 5.50 F	200	840	391	2520	STD	8	TT	100 A6	2.60	800
8 - 18	W 6	W 7; 5.50 F	200	840	391	2520	SPL	8	TT	100 A6	2.60	800
20"												
8.3 - 20	W 7	W 6	211	890	414	2670	STD	6	TT	96 A6	2.40	710
22"												
9.5 - 22	W 7	W 8	235	1000	458	2985	STD	6	TT	104 A6	2.20	900

STD: Standard
SPL: Special



MAIN APPLICATION:
TRACTOR



TR 171 (R-1W+)

TR 171 is a deep tread tire suitable for tractors in soil tillage operations. Thanks to its outstanding self-cleaning properties, it is ideal for wet and moist soil. Also in the harshest operating conditions, TR 171 provides excellent traction and extraordinary durability.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
12" 5.00 - 12	3.00 D DT; 3.00 D	4 JA; 3.50 B	130	580	271	1731	STD	4	TT	61 A6	2.00	257
5.00 - 12	3.00 D DT; 3.00 D	4 JA; 3.50 B	130	580	271	1731	STD	6	TT	67 A6	2.80	307
6.00 - 12	4.00 E DT; 4.00 E	4 JA	160	635	293	1867	STD	6	TT	76 A6	2.60	400
16" 9.5 - 16	W 8 L	8 LB	241	845	392	2499	STD	6	TT	96 A6	2.10	710
18" 8 - 18	W 6	W 7; 5.50 F	190	845	390	2515	STD	4	TT	85 A6	1.20	515
8 - 18	W 6	W 7; 5.50 F	190	845	390	2515	STD	6	TT	94 A6	1.90	670
9.5 - 18	W 8	-	241	900	417	2646	STD	8	TT	105 A6	3.00	925
20" 8.3 - 20	W 7	W 6	200	895	419	2670	STD	6	TT	96 A6	2.40	710
8.3 - 20	W 7	W 6	200	895	419	2670	STD	8	TT	101 A6	3.20	825
9.5 - 20	W 8	W 7	235	950	442	2835	STD	6	TT	101 A6	2.10	825
9.5 - 20	W 8	W 7	235	950	442	2835	STD	8	TT	107 A6	2.80	975
11.2 - 20	W 10	W 9; 9	285	1005	465	3000	STD	8	TT	113 A6	2.60	1150

STD: Standard



MAIN APPLICATION:
TRACTOR



TR 171 (R-1W+)

TR 171 is a deep tread tire suitable for tractors in soil tillage operations. Thanks to its outstanding self-cleaning properties, it is ideal for wet and moist soil. Also in the harshest operating conditions, TR 171 provides excellent traction and extraordinary durability.



TRACTION



SUITABLE FOR MUDDY GROUND



SELF-CLEANING



DURABILITY



DEEP TREAD

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
22" 8.3 - 22	W 7	W 6	205	945	444	2778	STD	8	TT	104 A6	3.20	900
9.5 - 22	W 8	W 7	235	1005	469	2955	STD	8	TT	110 A6	3.00	1060
24" 8.3 - 24	W 7	W 6	200	1005	470	3065	STD	6	TT	100 A6	2.40	800
8.3 - 24	W 7	W 6	200	1005	470	3065	STD	8	TT	105 A6	3.10	925
9.5 - 24	W 8	W 7	236	1066	500	3260	STD	6	TT	106 A6	2.10	950
9.5 - 24	W 8	W 7	236	1066	500	3260	STD	8	TT	111 A6	2.80	1090
11.2 - 24	W 10	W 9	285	1105	510	3270	STD	6	TT	110 A6	1.80	1060
11.2 - 24	W 10	W 9	285	1105	510	3270	STD	8	TT	116 A6	2.40	1250
11.2 - 24	W 10	W 9	285	1105	510	3270	STD	10	TT	116 A6	3.00	1400
12.4 - 24	W 11	W 9; W 10	315	1165	540	3480	STD	4	TT	106 A6	1.10	950
12.4 - 24	W 11	W 9; W 10	315	1165	540	3480	STD	6	TT	115 A6	1.70	1215
12.4 - 24	W 11	W 9; W 10	315	1165	540	3480	STD	8	TT	120 A6	2.30	1400

STD: Standard



MAIN APPLICATION:
TRACTOR



TR 171 (R-1W+)

TR 171 is a deep tread tire suitable for tractors in soil tillage operations. Thanks to its outstanding self-cleaning properties, it is ideal for wet and moist soil. Also in the harshest operating conditions, TR 171 provides excellent traction and extraordinary durability.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
24" 12.4 - 24	W 11	W 9; W 10	315	1165	540	3480	HD	8	TT	120 A6	2.30	1400
13.6 - 24	W 12	W 11	355	1210	562	3620	STD	6	TT	119 A6	1.60	1360
13.6 - 24	W 12	W 11	355	1210	562	3620	STD	8	TT	123 A6	2.00	1550
14.9 - 24	W 13	W 11; W 12	391	1265	584	3759	STD	6	TT	123 A6	1.40	1550
14.9 - 24	W 13	W 11; W 12	391	1265	584	3759	STD	8	TT	128 A6	1.80	1800
26" 11.2 - 26	W 10	W 9	284	1155	540	3396	STD	8	TT	117 A6	2.40	1285
12.4 - 26	W 11	W 10; W 9	315	1210	564	3557	STD	8	TT	121 A6	2.30	1450
13.6 - 26	W 12	W 11	340	1270	589	3785	STD	4	TT	110 A6	1.00	1060
13.6 - 26	W 12	W 11	340	1270	589	3785	STD	6	TT	120 A6	1.60	1400
13.6 - 26	W 12	W 11	340	1270	589	3785	STD	8	TT	126 A6	2.20	1700
28" 12.4 - 28	W 11	W 9; W 10	315	1260	589	3759	STD	6	TT	117 A6	1.70	1285
12.4 - 28	W 11	W 9; W 10	315	1260	589	3759	STD	8	TT	123 A6	2.30	1550
12.4 - 28	W 11	W 9; W 10	315	1260	589	3759	STD	12	TT	131 A6	3.50	1950
13.6 - 28	W 12	W 11	350	1300	607	3886	STD	4	TT	112 A6	1.00	1120

HD: Heavy Duty
STD: Standard



MAIN APPLICATION:
TRACTOR



TR 171 (R-1W+)

TR 171 is a deep tread tire suitable for tractors in soil tillage operations. Thanks to its outstanding self-cleaning properties, it is ideal for wet and moist soil. Also in the harshest operating conditions, TR 171 provides excellent traction and extraordinary durability.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
28" 13.6 - 28	W 12	W 11	350	1300	607	3886	STD	6	TT	121 A6	1.60	1450
13.6 - 28	W 12	W 11	350	1300	607	3886	STD	8	TT	125 A6	2.00	1650
13.6 - 28	W 12	W 11	350	1300	607	3886	HD	8	TT	125 A6	2.00	1650
13.6 - 28	W 12	W 11	350	1300	607	3886	STD	12	TT	134 A6	3.00	2120
14.9 - 28	W 13	W 11; W 12	388	1361	632	4070	STD	8	TT	130 A6	1.80	1900
14.9 - 28	W 13	W 11; W 12	388	1361	632	4070	HD	8	TT	130 A6	1.80	1900
14.9 - 28	W 13	W 11; W 12	388	1361	632	4070	STD	12	TT	137 A6	2.60	2300
14.9 - 28	W 13	W 11; W 12	388	1361	632	4070	HD	12	TT	137 A6	2.60	2300
16.9 - 28	W 15 L	W 14 L	435	1440	665	4307	STD	8	TT	135 A6	1.70	2180
16.9 - 28	W 15 L	W 14 L	435	1440	665	4307	STD	12	TT	143 A6	2.40	2725
30" 14.9 - 30	W 13	W 11; W 12	380	1415	659	4160	STD	8	TT	131 A6	1.80	1950
16.9 - 30	W 15 L	W 14 L	430	1490	690	4455	STD	8	TT	137 A6	1.70	2300
16.9 - 30	W 15 L	W 14 L	430	1490	690	4455	STD	12	TT	143 A6	2.40	2725
18.4 - 30	W 16 L	W 15 L	470	1550	716	4557	STD	10	TT	145 A6	1.80	2900

STD: Standard
HD: Heavy Duty



MAIN APPLICATION:
TRACTOR



TR 171 (R-1W+)

TR 171 is a deep tread tire suitable for tractors in soil tillage operations. Thanks to its outstanding self-cleaning properties, it is ideal for wet and moist soil. Also in the harshest operating conditions, TR 171 provides excellent traction and extraordinary durability.



TRACTION



SUITABLE FOR MUDDY GROUND



SELF-CLEANING



DURABILITY



DEEP TREAD

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
32" 12.4 - 32	W 11	W 9; W 10	315	1370	643	4028	STD	8	TT	124 A6	2.30	1600
34" 16.9 - 34	W 15 L	W 14 L	429	1585	738	4740	STD	8	TT	139 A6	1.70	2430
18.4 - 34	W 16 L	W 15 L	470	1655	768	4866	STD	10	TT	146 A6	1.80	3000
36" 12.4 - 36	W 11	W 9; W 10	315	1470	691	4332	STD	8	TT	126 A6	2.30	1700
13.6 - 36	W 12	W 11	345	1520	715	4469	STD	8	TT	129 A6	2.00	1850
38" 13.6 - 38	W 12	W 11	345	1585	738	4601	STD	8	TT	131 A6	2.00	1950
16.9 - 38	W 15 L	W 14 L	429	1685	788	4954	STD	8	TT	141 A6	1.70	2575
18.4 - 38	W 16 L	W 15 L	470	1760	820	5174	STD	10	TT	148 A6	1.80	3150

STD: Standard



MAIN APPLICATION:
TRACTOR



FARM 2000 (R-1)

The FARM 2000 tire is suitable on tractors for soil tillage and transport applications. It is the ideal tire for heavy-duty use and in all operating conditions where good traction is required.



TRACTION



DURABILITY



HEAVY DUTY SERVICE

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H		
	Rec.	Alt.									↓		
											bar	max load (kg)	
18"	8-18	W 6	-	195	840	390	2515	STD	4	TT	-	1.25	515
	8-18	W 6	-	195	840	390	2515	STD	6	TT	-	1.90	670
20"	8.3 - 20	W 7	-	210	895	417	2712	STD	4	TT	-	1.60	560
	8.3 - 20	W 7	-	210	895	417	2712	STD	6	TT	-	2.40	710
24"	8.3 - 24	W 7	-	211	995	471	3021	STD	6	TT	-	2.40	810
	8.3 - 24	W 7	W 6	211	995	471	3021	STD	8	TT	-	3.10	935
28"	12.4 - 28	W 11	W 9; W 10	320	1260	589	3704	STD	8	TT	123 A6	2.30	1550
	12.4 - 28	W 11	W 9; W 10	320	1260	589	3704	STD	10	TT	127 A6	2.90	1750
	12.4 - 28	W 11	W 9; W 10	320	1260	589	3704	STD	12	TT	131 A6	3.50	1950
	13.6 - 28	W 12	W 11	345	1310	610	3851	STD	6	TT	121 A6	1.60	1450
	13.6 - 28	W 12	W 11	345	1310	610	3851	STD	8	TT	125 A6	2.00	1650
	13.6 - 28	W 12	W 11	345	1310	610	3851	STD	10	TT	130 A6	2.50	1900
	13.6 - 28	W 12	W 11	345	1310	610	3851	STD	12	TT	134 A6	3.00	2120

STD: Standard



MAIN APPLICATION:
TRACTOR



FARM 2000 (R-1)

The FARM 2000 tire is suitable on tractors for soil tillage and transport applications. It is the ideal tire for heavy-duty use and in all operating conditions where good traction is required.



TRACTION DURABILITY HEAVY DUTY SERVICE

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
28" 14.9 - 28	W 13	W 11; W 12	385	1375	636	4194	STD	8	TT	130 A6	1.80	1900
14.9 - 28	W 13	W 11; W 12	385	1375	636	4194	STD	10	TT	134 A6	2.30	2120
14.9 - 28	W 13	W 11; W 12	385	1375	636	4194	STD	12	TT	137 A6	2.60	2300
14.9 - 28	W 13	W 11; W 12	385	1375	636	4194	STD	14	TT	139 A6	2.90	2430
16.9 - 28	W 15 L	W 14 L	429	1420	655	4310	STD	8	TT	135 A6	1.70	2180
16.9 - 28	W 15 L	W 14 L	429	1420	655	4310	STD	12	TT	143 A6	2.40	2725
30" 18.4 - 30	W 16 L	-	470	1560	718	4758	STD	14	TT	151 A6	2.6	3450

STD: Standard



**MAIN APPLICATION:
TRACTOR**



FARM 2000 PLUS (R-1)

FARM 2000 PLUS is an agriculture tire featuring a sturdy lug design for better performance in field and road operations. The deep tread provides an extended tire life, whereas the superior tread compound ensures better wear and tear resistance. FARM 2000 PLUS shows excellent self-cleaning features and specially designed lug angles making the tire particularly suitable for field and haulage applications.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
28" 16.9 - 28	W 15 L	W 14 L	440	1435	662	4302	STD	12	TT	143 A6	2.40	2725

STD: Standard



FARM SPECIAL (R-1)

FARM SPECIAL is a tractor tire suitable for both field and road operations. The strong nylon casing provides a high level of puncture resistance and a longer service life, whilst the rounded shoulders prevent soil damages ensuring the protection of the valuable crops. FARM SPECIAL features a unique tread design with special mud breakers for best self-cleaning properties. In addition, dual angled lugs provide excellent traction and reduced slippage.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
38" 14.00 - 38 (13.6 - 38)	W 12	W 11	345	1565	738	4601	STD	8	TT	131 A6	2.00	1950

STD: Standard



MAIN APPLICATION:
TRACTOR



AS 2001 (R-1)

AS 2001 is a bias cross-ply tire which best suits tractors in farming and haulage operations. The particularly strong casing provides very high durability and makes the AS 2001 tire ideal for heavy-duty operations.



TRACTION



DURABILITY



HEAVY DUTY SERVICE

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
26" 18.4 - 26	W 16 L	W 15 L	467	1475	650	4250	STD	10	TT	142 A6	1.80	2650
18.4 - 26	W 16 L	W 15 L	467	1475	650	4250	STD	10	TL	142 A6	1.80	2650
18.4 - 26	W 16 L	W 15 L	467	1475	650	4250	STD	12	TT	146 A6	2.30	3000
18.4 - 26	W 16 L	W 15 L	467	1475	650	4250	STD	12	TL	146 A6	2.30	3000
18.4 - 26	W 16 L	W 15 L	467	1475	650	4250	STD	14	TT	149 A6	2.60	3250
28" 16.9 - 28	W 15 L	W 14 L	429	1420	655	4307	STD	8	TT	135 A6	1.70	2180
16.9 - 28	W 15 L	W 14 L	429	1420	655	4307	STD	10	TT	139 A6	2.00	2430
16.9 - 28	W 15 L	W 14 L	429	1420	655	4307	STD	12	TT	143 A6	2.40	2725
16.9 - 28	W 15 L	W 14 L	429	1420	655	4307	STD	12	TL	143 A6	2.4	2725
16.9 - 28	W 15 L	W 14 L	429	1420	655	4307	SPL	12	TT	143 A6	2.40	2725

STD: Standard
SPL: Special



MAIN APPLICATION:
TRACTOR



TRAC FARM (R-1)

TRAC FARM is a heavy-duty tire specifically designed for tractors and soil tillage applications. Its strong casing and the deep tread make the tire suitable for the most difficult operating conditions, ensuring the best return on investment during the entire product life-cycle.



TRACTION



CUT & CHIP RESISTANCE



DURABILITY



DEEP TREAD



HEAVY DUTY SERVICE

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
20" 11.2 - 20	W 10	W 9	290	1000	463	2940	STD	8	TT	111 A6	2.40	1090
28" 12.4 - 28	W 11	W 9; W 10	320	1295	604	3807	STD	10	TT	124 A6	2.40	1600
12.4 - 28	W 11	W 9; W 10	320	1295	604	3807	STD	12	TT	125 A6	2.50	1650
13.6 - 28	W 12	W 11	365	1345	625	4089	STD	12	TT	128 A6	2.30	1800
16.9 - 28	W 15 L	W 14 L	440	1435	663	4219	STD	12	TT	143 A6	2.40	2725
30" 18.4 - 30	W 16 L	W 15 L	467	1550	716	4557	STD	12	TT	149 A6	2.30	3250
18.4 - 30	W 16 L	-	470	1565	-	-	STD	14	TT	151 A6	2.6	3450
18.4 - 30	W 16 L	-	470	1565	-	-	HD	14	TT	151 A6	2.6	3450

STD: Standard
HD: Heavy Duty



MAIN APPLICATION:
TRACTOR



TRAC FARM PLUS (R-1)

TRAC FARM PLUS is a rear tractor tire specifically designed for farming applications. The tire features a deeper tread with dual angle lugs and extra rubber at the center to ensure both excellent traction and a comfortable ride on the road. The special tread design provides more contact for better stability whereas the strong casing offers excellent resistance against stub penetration. TRAC FARM PLUS is made of a superior tread compound optimizing wear and tear resistance and ensuring a longer tire life-cycle.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
28" 12.4 - 28	W 11	W 9; W 10	320	1295	603	3899	STD	12	TT	125 A6	2.50	1650
13.6 - 28	W 12	W 11	365	1345	621	4088	STD	12	TT	128 A6	2.30	1800
16.9 - 28	W 15 L	W 14 L	440	1435	660	4298	STD	12	TT	143 A6	2.40	2725
30" 16.9 - 30	W 15 L	W 14 L	440	1475	679	4466	STD	12	TT	144 A6	2.40	2800

STD: Standard



MAIN APPLICATION:
TRACTOR



COMMANDER (R) (R-1)

COMMANDER (R) features a deep tread with strong lug bases for a longer tire life-cycle. The special dual-angle lug design provides both excellent traction in the field and comfortable ride on the road. The flat tread profile along with the larger contact area results in extraordinary stability. The strong casing is made of a cut-and-chip-resistant compound providing better puncture resistance.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
24"												
9.5 - 24	W8	W 7	245	1065	507	3308	STD	12	TT	114 A6	3.0	1180
12.4-24	W 11	W 10	320	1190	559	3632	STD	12	TT	123 A6	2.50	1550
28"												
12.4 - 28	W 11	W 9; W 10	320	1295	600	3946	STD	12	TT	125 A6	2.50	1650
13.6 - 28	W 12	W 11	365	1345	621	4088	STD	12	TT	128 A6	2.30	1800
14.9 - 28	W 13	W 11; W 12	390	1390	645	4213	STD	12	TT	137 A6	2.60	2300
16.9 - 28	W 15 L	W 14 L	440	1430	663	4274	STD	12	TT	143 A6	2.40	2725
30"												
18.4 - 30	W 16 L	-	475	1580	734	4834	STD	14	TT	151 A6	2.60	3450
18.4 - 30	W 16 L	-	475	1580	734	4834	STD	18	TT	153 A6	2.8	3650
18.4 - 30	W 16 L	-	475	1580	734	4834	STD	18	TL	153 A6	2.8	3650

STD: Standard



MAIN APPLICATION:
TRACTOR



TR 270 (R-2)

TR 270 is a tractor tire suitable for soil tillage applications. It is specially designed for providing maximum performance on wet and moist soil. In these soil conditions, a tire is required to offer superior grip and enhanced self-cleaning features. TR 270 perfectly meets all these characteristics.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H		
	Rec.	Alt.									↓		
											bar	max load (kg)	
26"	23.1 - 26	DW 20 A; DW 20 B	-	590	1646	739	4922	STD	8	TT	145 A6	1.10	2900
	23.1 - 26	DW 20 A; DW 20 B	-	590	1646	739	4922	STD	10	TT	149 A6	1.40	3250
	23.1 - 26	DW 20 A; DW 20 B	-	590	1646	739	4922	STD	12	TT	153 A6	1.70	3650
	23.1 - 26	DW 20 A; DW 20 B	-	590	1646	739	4922	STD	12	TL	153 A6	1.70	3650
	23.1 - 26	DW 20 A; DW 20 B	-	590	1646	739	4922	STD	14	TT	156 A6	2.00	4000
30"	18.4 - 30	DW 16 L; DW 16 A	W 15 L; DW 15 A	465	1580	720	4724	STD	8	TT	139 A6	1.40	2430
	18.4 - 30	DW 16 L; DW 16 A	W 15 L; DW 15 A	465	1580	720	4724	STD	8	TL	139 A6	1.40	2430
	18.4 - 30	DW 16 L; DW 16 A	W 15 L; DW 15 A	465	1580	720	4724	STD	12	TT	149 A6	2.30	3250
	23.1 - 30	DW 20 A; DW 20 B	-	590	1748	790	5227	STD	8	TT	146 A6	1.10	3000
	23.1 - 30	DW 20 A; DW 20 B	-	590	1748	790	5227	STD	10	TT	151 A6	1.40	3450
	23.1 - 30	DW 20 A; DW 20 B	-	590	1748	790	5227	STD	12	TT	155 A6	1.70	3875
34"	18.4 - 34	DW 16 A; W 16 L	W 15 L	465	1682	771	5029	STD	8	TT	142 A6	1.40	2650
	18.4 - 34	DW 16 A; W 16 L	W 15 L	465	1682	771	5029	STD	12	TT	151 A6	2.30	3450
	23.1 - 34	DW 20 A; DW 20 B	-	590	1850	841	5532	STD	8	TT	148 A6	1.10	3150

STD: Standard



MAIN APPLICATION:
TRACTOR



TR 270 (R-2)

TR 270 is a tractor tire suitable for soil tillage applications. It is specially designed for providing maximum performance on wet and moist soil. In these soil conditions, a tire is required to offer superior grip and enhanced self-cleaning features. TR 270 perfectly meets all these characteristics.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
34" 23.1 - 34	DW 20 A; DW 20 B	-	590	1850	841	5532	STD	10	TT	153 A6	1.40	3650
23.1 - 34	DW 20 A; DW 20 B	-	590	1850	841	5532	STD	12	TT	156 A6	1.70	4000
23.1 - 34	DW 20 A; DW 20 B	-	590	1850	841	5532	STD	14	TT	160 A6	2.20	4500
38" 13.6 - 38	W 12	DW 12 A; W 11	345	1600	-	-	STD	6	TT	122 A6	1.50	1500
18.4 - 38	W 16 A; W 16 L	W 15 L; DD 16	465	1784	822	5334	STD	8	TT	143 A6	1.40	2725
18.4 - 38	W 16 A; W 16 L	W 15 L; DD 16	465	1784	822	5334	STD	12	TT	153 A6	2.30	3650
20.8 - 38	W 18 A; W 18 L	DD 18; DW 18 A	530	1830	841	5472	STD	8	TT	148 A6	1.30	3150
20.8 - 38	W 18 A; W 18 L	DD 18; W 18 A	530	1830	841	5472	STD	10	TT	151 A6	1.60	3450
20.8 - 38	W 18 A; W 18 L	DD 18; W 18 A	530	1830	841	5472	STD	12	TT	156 A6	2.00	4000
46" 13.6 - 46	W 12	W 12 A	345	1804	-	-	STD	6	TT	125 A6	1.50	1650

STD: Standard



MAIN APPLICATION:
TRACTOR



TR 273 (R-2)

TR 273 is a tractor tire suitable for soil tillage and specifically designed to provide maximum performance on wet and moist soil. In these soil conditions, a tire is required to offer superior grip and enhanced self-cleaning properties. TR 273 perfectly meets all these characteristics.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.										
24"												
12.4 - 24	W 11	W 10	315	1195	550	3722	STD	8	TT	121 A6	2.30	1450
14.9 - 24	W 13	W 12	380	1310	595	3995	STD	8	TT	128 A6	1.80	1800
14.9 - 24	W 13	W 12	380	1310	595	3995	STD	10	TT	136 A6	2.6	2240
26"												
23.1 - 26	DW 20 A; DW 20 B	-	590	1655	757	4998	STD	10	TT	149 A6	1.40	3250
23.1 - 26	DW 20 A; DW 20 B	-	590	1655	757	4998	STD	12	TT	153 A6	1.70	3650
28"												
14.9 - 28	W 13	W 12	380	1410	652	4405	STD	8	TT	130 A6	1.80	1900
30"												
18.4 - 30	W 16 L	W 15 L	465	1585	723	4739	STD	12	TT	149 A6	2.30	3250
23.1 - 30	DW 20 A; DW 20 B	-	590	1748	794	5356	STD	10	TT	151 A6	1.40	3450
23.1 - 30	DW 20 A; DW 20 B	-	590	1748	794	5356	STD	14	TT	-	1.90	4125
34"												
23.1 - 34	DW 20 A; DW 20 B	-	590	1850	833	5634	STD	10	TT	153 A6	1.40	3650
23.1 - 34	DW 20 A; DW 20 B	-	590	1850	833	5634	STD	14	TT	-	2.00	4500

STD: Standard



MAIN APPLICATION:
TRACTOR



TR 318

TR 318 is specifically designed for sprayers. Its dual-angled lugs provide excellent traction and outstanding driving comfort. TR 318 also features extraordinary self-cleaning properties. The strong casing stands for best durability.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 15 KM/H	
	Rec.	Alt.									bar	max load (kg)
12" 23 X 9.00 - 12	7.0	-	220	585	-	-	STD	6	TT	93 A3	3.0	650
26 X 10.00 - 12	8.5	-	265	675	-	-	STD	8	TT	107 A3	3.70	975

STD: Standard



PUDDLE SPECIAL (R-2)

PUDDLE SPECIAL is a R-2 agricultural tire specifically designed for operations in paddy fields. The extra deep tread design along with the special lug pattern provides best grip and excellent traction even on wet and soft soil. The wide center bar provides better adaptability for road applications and provides extraordinary service performance. In addition, PUDDLE SPECIAL shows superior self-cleaning features and excellent durability.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									bar	max load (kg)
32" 11-32	W 10	W 9	305	1465	702	4384	STD	6	TT	-	1.60	1080
11-32	W 10	W 9	305	1465	702	4384	STD	6	TL	-	1.60	1080

STD: Standard



MAIN APPLICATION:
TRACTOR



TR 459 (R-4)

459 has been particularly designed for digging and loading operations as well as municipality and maintenance applications with tractors and backhoe loaders. It offers high stability and outstanding traction.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 40 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
20" 400/70 - 20	13	12 SDC; 13 SDC; 14	410	1090	-	-	STD	-	TL	149 A8	4.00	3250
24" 14.9 - 24	DW 13	DW 12; DW 11; DW 13 L	390	1244	562	3657	IND	8	TL	137 A8	2.10	2300
14.9 - 24	DW 13	DW 12; DW 11; DW 13 L	390	1244	562	3657	IND	12	TL	145 A8	2.90	2900
16.9 - 24	DW 15 L	DW 14 L	440	1310	590	3850	IND	8	TL	142 A8	1.90	2650
16.9 - 24	DW 15 L	DW 14 L	440	1310	590	3850	IND	10	TL	145 A8	2.20	2900
16.9 - 24	DW 15 L	DW 14 L	440	1310	590	3850	IND	12	TL	149 A8	2.60	3250
17.5L - 24	DW 15 L	DW 14 L	445	1270	557	3825	IND	8	TL	139 A8	1.70	2430
17.5L - 24	DW 15 L	DW 14 L	445	1270	557	3825	IND	10	TL	144 A8	2.20	2800
17.5L - 24	DW 15 L	DW 14 L	445	1270	557	3825	IND	12	TL	148 A8	2.70	3150
18.4 - 24	DW 16 L	DW 15 L	472	1375	603	4043	IND	12	TL	155 A8	2.50	3875
19.5L - 24	DW 16 L	-	490	1325	585	3840	IND	10	TL	147 A8	1.90	3075
19.5L - 24	DW 16 L	-	490	1325	585	3840	IND	12	TL	151 A8	2.30	3450
19.5L - 24	DW 16 L	-	490	1325	585	3840	IND SPL	12	TL	151 A8	2.30	3450
21L - 24	DW 18 L	-	533	1378	605	3995	IND	12	TL	155 A8	2.20	3875

IND: Industrial
IND SPL: Industrial Special
STD: Standard



MAIN APPLICATION:
TRACTOR



TR 459 (R-4)

459 has been particularly designed for digging and loading operations as well as municipality and maintenance applications with tractors and backhoe loaders. It offers high stability and outstanding traction.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 40 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
26" 18.4 - 26	DW 16 L	DW 15 L	472	1425	628	4346	IND	12	TL	156 A8	2.50	4000
18.4 - 26	DW 16 L	DW 15 L	472	1425	628	4346	IND	14	TL	159 A8	2.90	4375
28" 16.9 - 28	DW 15 L	DW 14 L	440	1410	640	4145	IND	8	TL	145 A8	1.90	2900
16.9 - 28	DW 15 L	DW 14 L	440	1410	640	4145	IND	10	TL	148 A8	2.20	3150
16.9 - 28	DW 15 L	DW 14 L	440	1410	640	4145	IND	12	TL	152 A8	2.60	3550
18.4 - 28	DW 16 L	DW 15 L	472	1475	653	4337	IND	12	TL	157 A8	2.50	4125
21L - 28	DW 18 A	-	535	1480	-	-	IND	12	TL	157 A8	2.20	4125
30" 16.9 - 30	DW 15 L	DW 14 L	440	1470	657	4484	IND	12	TL	153 A8	2.70	3650

IND: Industrial



MAIN APPLICATION:
TRACTOR



TR 461 (R-4)

TR 461 is a BKT pattern suitable for municipality and maintenance applications with tractors as well as for loading operations with telehandlers. The sidewall protection features particular resistance against cuts and bruises providing a longer life even on hard surfaces in addition to excellent stability.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 40 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
18" 12.5/80 - 18	W 9	11	305	987	435	2902	STD	12	TL	138 A8	3.70	2360
24" 16.9 - 24	DW 15 L	DW 14 L	440	1280	566	3763	STD	14	TL	151 A8	2.90	3450
19.5L - 24	DW 16 L	-	490	1310	578	3851	STD	12	TL	151 A8	2.30	3450
19.5L - 24	DW 16 L	-	490	1310	578	3851	STD	14	TL	154 A8	2.60	3750
21L - 24	DW 18 L	-	540	1385	607	4072	STD	14	TL	157 A8	2.50	4125
28" 16.9 - 28	DW 15 L	DW 14 L	440	1390	620	4087	STD	14	TL	154 A8	2.90	3750

STD: Standard



TR 463 (R-4)

TR 463 has been specially designed for backhoe loaders and industrial tractors. Made of a superior tread compound and featuring a strong nylon casing, this tire stands for best results in industrial and OTR applications, and on construction sites. TR 463 provides excellent traction for drive wheels.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 40 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
24" 16.9 - 24	DW 15 L	DW 14 L	445	1300	584	3877	IND	12	TL	149 A8	2.60	3250
28" 16.9 - 28	DW 15 L	DW 14 L	450	1405	636	4190	IND	12	TL	152 A8	2.60	3550

IND: Industrial



MAIN APPLICATION:
TRACTOR



TRAC SUPER

TRAC SUPER is the first radial tire introduced in BKT's municipality segment. The tire structure ensures an excellent smooth drive combined with best traction performance. As a result, it is particularly suitable for applications on large lawn surfaces such as parks and roadsides.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)										
		Rec.	Alt.							↓										
											bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6
17"											km/h									
440/50 R 17	135 D	14.00	13.00	441	872	395	2630	410	STD		65	955	960	1070	1265	1440	1635	1855	1985	2180
											40	1300	1305	1455	1720	1960	2225	2525	2700	2965
											30	1440	1450	1615	1915	2175	2475	2805	3000	3295
											10	1720	1730	1925	2280	2595	2945	3340	3575	3925

STD: Standard



AT 316

AT 316 is suitable for compact utility tractors in municipality and maintenance applications. The special tread design provides excellent traction without compromising field protection - an essential feature for this kind of application. AT 316 is also available as "aramid-belted" version to provide increased puncture resistance.



SIZE	RIM		S.W. (in.)	O.D. (in.)	SLR (in.)	RC (in.)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 15 KM/H	
	Rec.	Alt.									bar	max load (kg)
12"												
24 X 12.00 - 12	10.50 I - 55; I - 70; I - 90	-	315	610	271	1769	STD	4	TL	-	1.40	775
24 X 12.00 - 12	10.50 I - 55; I - 70; I - 90	-	315	610	271	1769	AB	6	TL	-	2.20	1030

STD: Standard

AB: Aramid Belted



MAIN APPLICATION:
HARVESTER



AGRIMAX TERIS

RADIAL HARVESTING TIRES

Today's high-power harvesters require tires that are able to support heavy equipment and loads without damaging the crops. BKT is committed to provide you with radial tires at the cutting edge to increase your yield. AGRIMAX TERIS is the right partner for all your combined operations.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)									
		Rec.	Alt.							↓									
26"	620/75 R 26 CHO	166 A8/B	DW 20 B	-	625	1590	730	4851	750	STD	bar	0.8	1.0	1.4	1.6	2.0	2.4	2.8	3.2
											km/h								
											50	2440	2810	3445	3765	4135	4505	4880	5300
											40	2440	2810	3445	3765	4135	4505	4880	5300
											30	2615	3010	3690	4030	4430	4825	5225	5675
											15 Cyc.	4025	4635	5685	6210	6825	7435	8050	8745
											10 Cyc.	4390	5060	6205	6775	7445	8110	8780	9540
750/65 R 26 CHO (28L R 26)	166 A8/B	DW 25 B	DW 23 B	764	1636	713	4908	750	STD	bar	0.8	1.0	1.4	1.6	2.0	2.4			
										km/h									
										50	2915	3340	4085	4400	4930	5300			
										40	2915	3340	4085	4400	4930	5300			
										30	3125	3580	4370	4715	5280	5675			
										15 Cyc.	4810	5510	6735	7260	8135	8745			
										10 Cyc.	5250	6015	7350	7920	8875	9540			
750/65 R 26 CHO (28L R 26)	171 A8/B	DW 25 B	DW 23 B	764	1636	713	4908	750	STD	bar	0.8	1.0	1.4	1.6	2.0	2.4	2.8	3.2	
										km/h									
										50	2915	3340	4085	4400	4930	5300	5720	6150	
										40	2915	3340	4085	4400	4930	5300	5720	6150	
										30	3125	3580	4370	4715	5280	5675	6125	6585	
										15 Cyc.	4810	5510	6735	7260	8135	8745	9440	10150	
										10 Cyc.	5250	6015	7350	7920	8875	9540	10300	11070	
30"	620/75 R 30 CHO	168 A8/B	DW 20 B	-	625	1692	779	5169	800	STD	bar	0.8	1.0	1.4	1.6	2.0	2.4	2.8	3.2
											km/h								
											50	2580	2970	3640	3980	4370	4760	5155	5600
											40	2580	2970	3640	3980	4370	4760	5155	5600
											30	2760	3180	3900	4260	4680	5100	5520	5995
											15 Cyc.	4255	4900	6010	6565	7210	7855	8505	9240
											10 Cyc.	4640	5345	6555	7160	7865	8570	9275	10080
32"	650/75 R 32 CHO	172 A8/B	DW 21 B	DW 20 B; DW 23 B	655	1789	794	5324	825	STD	bar	0.8	1.0	1.4	1.6	2.0	2.4	2.8	3.2
											km/h								
											50	2900	3340	4095	4475	4915	5355	5800	6300
											40	2900	3340	4095	4475	4915	5355	5800	6300
											30	3105	3575	4385	4790	5265	5735	6210	6745
											15 Cyc.	4785	5510	6760	7385	8110	8840	9565	10395
											10 Cyc.	5220	6015	7375	8055	8850	9640	10435	11340

STD: Standard



MAIN APPLICATION:
HARVESTER



AGRIMAX TERIS

RADIAL HARVESTING TIRES

Today's high-power harvesters require tires that are able to support heavy equipment and loads without damaging the crops. BKT is committed to provide you with radial tires at the cutting edge to increase your yield. AGRIMAX TERIS is the right partner for all your combined operations.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)																							
		Rec.	Alt.							↓																							
				bar																													
				km/h																													
32" 800/65 R 32 CHO (30.5L R 32)	178 A8/175 B	DW 27 B	DW 25 B; DH 27 B	818	1853	838	5587	875	STD	0.8	1.0	1.4	1.6	2.0	2.4	2.8	3.2																
										50	3175	3660	4485	4900	5455	5865	6420	6900															
										40	3450	3975	4875	5325	5925	6375	6975	7500															
										30	3695	4255	5220	5700	6340	6825	7465	8025															
										15 Cyc.	5695	6560	8045	8790	9780	10520	11510	12375															
										10 Cyc.	6210	7155	8775	9585	10665	11475	12555	13500															
900/60 R 32 CHO	181 A8/178 B	DW 27 B	DW 28 B; DW 30 B	886	1893	840	5736	925	STD	0.8	1.0	1.4	1.6	2.0	2.4	2.8	3.2																
										50	3375	3825	4800	5325	5925	6375	6975	7500															
										40	3715	4210	5280	5860	6520	7015	7675	8250															
										30	3975	4505	5655	6270	6980	7510	8215	8830															
										15 Cyc.	6130	6945	8715	9670	10760	11575	12665	13615															
										10 Cyc.	6685	7575	9505	10545	11735	12625	13815	14850															
900/60 R 32 CHO	185 A8/182 B	DW 27 B	DW 28 B; DW 30 B	886	1893	840	5736	925	STD	0.8	1.0	1.4	1.6	2.0	2.4	2.8	3.2	3.6	4.0														
										50	3375	3825	4800	5325	5925	6375	6975	7500	7990	8500													
										40	3715	4210	5280	5860	6520	7015	7675	8250	8695	9250													
										30	3975	4505	5655	6270	6980	7510	8215	8830	9305	9900													
										15 Cyc.	6130	6945	8715	9670	10760	11575	12665	13615	14350	15265													
										10 Cyc.	6685	7575	9505	10545	11735	12625	13815	14850	15655	16650													
1050/50 R 32 CHO	184 A8/181 B	36.0 VA	-	1059	1893	840	5685	875	STD	0.8	1.0	1.4	1.6	2.0	2.4	2.8	3.2																
										50	3715	4210	5280	5860	6520	7015	7675	8250															
										40	4050	4590	5760	6390	7110	7650	8370	9000															
										30	4335	4915	6165	6840	7610	8190	8960	9630															
										15 Cyc.	6685	7575	9505	10545	11735	12625	13815	14850															
										10 Cyc.	7290	8265	10370	11505	12800	13770	15070	16200															

STD: Standard



MAIN APPLICATION:
HARVESTER



AGRIMAX TERIS

RADIAL HARVESTING TIRES

Today's high-power harvesters require tires that are able to support heavy equipment and loads without damaging the crops. BKT is committed to provide you with radial tires at the cutting edge to increase your yield. AGRIMAX TERIS is the right partner for all your combined operations.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)																						
		Rec.	Alt.							↓																						
											bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2	3.6										
34" IF 580/80 R 34 CFO	177 D	DW 20 B; DW 20 A	DW 21 A; DW 21 B	586	1792	810	5389	850	STD	km/h	65	2705	3140	3580	4090	4530	4965	5405	5770	6355	6865	7300										
										50	2705	3140	3580	4090	4530	4965	5405	5770	6355	6865	7300											
										40	2705	3140	3580	4090	4530	4965	5405	5770	6355	6865	7300											
										30	2705	3140	3580	4090	4530	4965	5405	5770	6355	6865	7300											
										30 Cyc.	3515	4080	4655	5315	5890	6455	7025	7500	8260	8925	9490											
										25	2705	3140	3580	4090	4530	4965	5405	5770	6355	6865	7300											
										15 Cyc.	4195	4865	5550	6340	7020	7695	8380	8945	9850	10640	11315											
										10	2705	3140	3580	4090	4530	4965	5405	5770	6355	6865	7300											
																					bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2	3.8
										42" 520/85 R 42	168 D	DW 16 L	DD 18 L	516	1951	890	5851	925	STD	km/h	65	1850	2185	2520	2800	3140	3420	3980	4540	5100	5600	-
50	1945	2295	2650	2940	3295	3590	4175	4765	5355											5880	-											
40	2025	2395	2765	3070	3440	3745	4360	4970	5585											6135	-											
30	2130	2515	2900	3220	3610	3930	4575	5250	5865											6440	-											
25	2195	2590	2990	3320	3720	4055	4715	5380	6045											6640	-											
10	2775	3280	3780	4200	4705	5125	5965	6805	7645											8400	-											
10 Cyc.	-	-	-	-	-	-	-	-	-											-	9520											

STD: Standard



MAIN APPLICATION:
HARVESTER



AGRIMAX RT 600

RADIAL TRACTOR TIRES

AGRIMAX RT 600 is the ideal tire for grassland, harvesting and spraying applications. Thanks to its large ground contact area, AGRIMAX RT 600 ensures an excellent pressure distribution and protects your soil preserving the productivity of your business.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)																					
		Rec.	Alt.																												
26" 620/75 R 26 (23.1 R 26)	167 A8/B	DW 20 B	-	625	1590	730	4851	750	STD	bar																					
										km/h	0.8	1.0	1.4	1.6	2.0	2.4	2.8	3.2	3.4	3.8											
										50	2510	2890	3545	3870	4255	4635	5015	5450	-	-											
										40	2510	2890	3545	3870	4255	4635	5015	5450	-	-											
										30	2685	3095	3795	4145	4555	4960	5370	5835	-	-											
										10 LT	3365	3875	4750	5190	5700	6210	6725	7305	-	-											
										10 HT	2685	3095	3795	4145	4555	4960	5370	5835	-	-											
10 Cyc.	-	4125	5285	5795	6720	7370	8065	8760	8895	9265																					
28" 540/65 R 28	142 D/145 A8	W 16 L	W 18 L	530	1413	642	4202	675	STD	bar																					
										km/h	0.6	0.8	1.0	1.2	1.4	1.6															
										65	1485	1750	1990	2230	2440	2650															
										50	1560	1840	2090	2340	2565	2785															
										40	1625	1915	2175	2440	2670	2900															
										30	1710	2015	2290	2565	2810	3050															
										10 LT	1995	2350	2670	2990	3275	3555															
10 HT	1710	2015	2290	2565	2810	3050																									
32" 800/65 R 32 (30.5L R 32)	176 A8/173 B	DW 27 B	DH 27 B; DW 25 B	775	1820	823	5558	875	STD	bar																					
										km/h	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.0	3.2	3.6											
										50	3175	3660	4485	4900	5385	5865	6350	6500	-	-											
										40	3450	3975	4875	5325	5850	6375	6900	7100	-	-											
										30	3695	4255	5220	5700	6260	6825	7385	7600	-	-											
										10 LT	4625	5330	6535	7140	7840	8545	9250	9515	-	-											
										10 HT	3695	4255	5220	5700	6260	6825	7385	7600	-	-											
10 Cyc.	-	5655	7230	7960	9250	10140	11055	11540	12025	12440																					
800/65 R 32 (30.5L R 32)	181 A8/178 B	DW 27 B	DH 27 B; DW 25 B	775	1820	823	5558	875	STD	bar																					
										km/h	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4										
										50	3175	3660	4485	4900	5385	5865	6350	6900	7500	-	-										
										40	3450	3975	4875	5325	5850	6375	6900	7500	8250	-	-										
										30	3695	4255	5220	5700	6260	6825	7385	8025	8830	-	-										
										10 LT	4625	5330	6535	7140	7840	8545	9250	10050	11055	-	-										
										10 HT	3695	4255	5220	5700	6260	6825	7385	8025	8830	-	-										
10 Cyc.	-	5655	7230	7960	9250	10140	11055	12025	12440	13000	14000																				
1050/50 R 32	184 A8/181 B	36.0 VA	-	1059	1863	826	5700	875	STD	bar																					
										km/h	0.8	1.0	1.4	1.6	2.0	2.4	2.8	3.2	3.4	3.8											
										50	3795	4375	5365	5860	6435	7015	7590	8250	-	-											
										40	4140	4770	5850	6390	7020	7650	8280	9000	-	-											
										30	4430	5105	6260	6840	7515	8190	8860	9630	-	-											
										10 LT	5550	6395	7840	8565	9410	10255	11100	12060	-	-											
										10 HT	4430	5105	6260	6840	7515	8190	8860	9630	-	-											
10 Cyc.	-	6810	8725	9565	11095	11555	12645	13595	14195	15300																					

STD: Standard



MAIN APPLICATION:
HARVESTER



AGRIMAX RT 600

RADIAL TRACTOR TIRES

AGRIMAX RT 600 is the ideal tire for grassland, harvesting and spraying applications. Thanks to its large ground contact area, AGRIMAX RT 600 ensures an excellent pressure distribution and protects your soil preserving the productivity of your business.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)							
		Rec.	Alt.							↓							
38" 650/65 R 38	157 D/160 A8	DW 20 B	-	645	1811	833	5443	875	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	
										km/h	65	2310	2725	3095	3465	3795	4125
										50	2430	2865	3255	3645	3990	4335	
										40	2520	2970	3375	3780	4140	4500	
										30	2660	3135	3560	3990	4370	4745	
										10 LT	3100	3650	4150	4650	5090	5530	
										10 HT	2660	3135	3560	3990	4370	4745	

STD: Standard



STAR TRAC

STAR TRAC is the BKT tire for harvesters at cotton farms, which is able to support heavy loads. Thanks to its particularly deep tread design, it ensures both excellent traction in the fields and excellent performance during road transfers. On cotton plantations showing the typical middle-sized shrubs, harvesting demands tire features like excellent flotation and reduced soil compaction. Moreover, the tire is made of a special compound providing high resistance against cuts and typical damages of this application.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									↓		
32" DW 500/95 D 32	13.00 DW	-	500	1836	809	5324	STD	-	TL	162 A8/169 A5	bar	1.70	
											km/h	40	4750
											25	5800	
VA 500/95 D 32	13.00 VA	-	500	1836	809	5324	STD	-	TL	179 A8/186 A5	bar	4.20	
											km/h	40	7750
											25	9500	

STD: Standard



MAIN APPLICATION:
HARVESTER



TR 137 (R-1)

TR 137 is BKT's most suitable tire for all harvesting operations. It ensures high flotation capability along with low soil compaction and excellent traction in the field. The tire is available in different versions: the "aramid-belted" version provides better puncture resistance and protection against all typical damages of this application; the "HD" version is for high load capacity to improve today's farmers' requirements in terms of productivity.



TRACTION



HIGH FLOTATION
CAPABILITY



HEAVY DUTY SERVICE



COMFORT



HIGH LOAD
CAPACITY



HIGH PUNCTURE
RESISTANCE

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
32" 24.5 - 32	DW 21 B	DW 20 B	622	1805	807	5343	STD	12	TL	159 A6	1.70	4375
24.5 - 32	DW 21 B	DW 20 B	622	1805	807	5343	STD	14	TL	163 A6	2.00	4875
30.5L - 32	DH 27 B	DW 27 B	770	1865	831	5520	STD	12	TL	162 A6	1.40	4750
30.5L - 32	DH 27 B	DW 27 B	770	1865	831	5520	STD	14	TL	164 A6	1.60	5000
30.5L - 32	DH 27 B	DW 27 B	770	1865	831	5520	STD	16	TL	167 A6	1.80	5450
30.5L - 32	DH 27 B	DW 27 B	770	1865	831	5520	AB	18	TL	170 A6	2.10	6000
30.5L - 32	DH 27 B	DW 27 B	770	1865	831	5520	HD	18	TL	170 A6	2.10	6000

STD: Standard
AB: Aramid Belted
HD: Heavy Duty



**MAIN APPLICATION:
HARVESTER**



TR 360

TR 360 is suitable for implement machinery in hay harvesting and lawn and garden applications. The particular tread design along with the casing structure provides excellent stability in all field conditions and ensures a long tire life-cycle.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
8" 18 X 7 - 8	5.5	-	180	460	202	1334	STD	6	TL	-	3.10	450

STD: Standard



TR 882

TR 882 is a very versatile tire suitable for several applications and vehicles. Designed to fit implement machinery and hay harvesters/balers, its usage is not only limited to soil tillage and hay harvesting operations. BKT has developed a specific TR 882 version to use the tire in forestry applications with trailers. TR 882 is also available as "aramid-belted", "HD" and "special" versions to meet specific end user requirements.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.										↓	
15.5" 400/60 - 15.5	AG 13.00	-	400	875	380	2564	STD	8	TL	134 A8	122 A8	2.40	2375
												30 FR	2120
												30 DW	1680
												40 DW	1500
												bar	3.60
												km/h	3250
												30 FR	2900
												30 DW	2240
												40 DW	2000

STD: Standard



**MAIN APPLICATION:
HARVESTER**



TR 882

TR 882 is a very versatile tire suitable for several applications and vehicles. Designed to fit implement machinery and hay harvesters/balers, its usage is not only limited to soil tillage and hay harvesting operations. BKT has developed a specific TR 882 version to use the tire in forestry applications with trailers. TR 882 is also available as "aramid-belted", "HD" and "special" versions to meet specific end user requirements.



TRACTION



HIGH FLOTATION CAPABILITY



AGRO-INDUSTRIAL USE



CUT & CHIP RESISTANCE



HEAVY DUTY SERVICE



HIGH PUNCTURE RESISTANCE

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.										↓	
15.5" 400/60 - 15.5	AG 13.00	-	400	875	380	2564	AB	14	TL	145 A8	132 A8	bar	3.60
												km/h	
												30 FR	3250
												40 FR	2900
												30 DW	2240
												40 DW	2000
400/60 - 15.5	AG 13.00	-	400	875	380	2564	HD	14	TL	145 A8	132 A8	bar	3.60
												km/h	
												30 FR	3250
												40 FR	2900
												30 DW	2240
												40 DW	2000
400/60 - 15.5	AG 13.00	-	400	875	380	2564	SPL	14	TL	145 A8	132 A8	bar	3.60
												km/h	
												30 FR	3250
												40 FR	2900
												30 DW	2240
												40 DW	2000
400/60 - 15.5	AG 13.00	-	400	875	380	2564	STD	18	TL	149 A8	137 A8	bar	4.50
												km/h	
												30 FR	3640
												40 FR	3250
												30 DW	2575
												40 DW	2300
400/60 - 15.5	AG 13.00	-	400	875	380	2564	HD	18	TL	149 A8	137 A8	bar	4.50
												km/h	
												30 FR	3640
												40 FR	3250
												30 DW	2575
												40 DW	2300
400/60 - 15.5	AG 13.00	-	400	875	380	2564	SPL	18	TL	149 A8	137 A8	bar	4.50
												km/h	
												30 FR	3640
												40 FR	3250
												30 DW	2575
												40 DW	2300

STD: Standard
 AB: Aramid Belted
 HD: Heavy Duty
 SPL: Special



MAIN APPLICATION:
HARVESTER




FLOTATION 558

FLOTATION 558 is a cross-ply flotation tire suitable for hay harvesters/balers, implement machinery and trailers both on and off the road. It is particularly recommended on muddy grounds and whenever traction and high flotation are essential for good soil tillage.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)			
	Rec.	Alt.										↓			
22.5" 400/55 - 22.5	AG 11.75	12.25; 13.00; AG 13.00	405	1020	445	3084	STD	14	TL	150 A8/146 B	138 A8/134 B	bar	3.00	3.20	3.50
												km/h			
												10 FR	4285	4450	4690
												20 FR	3855	4005	4220
												30 FR	3425	3560	3750
												40 FR	3060	3180	3350
												50 FR	2755	2860	3000
												10 DW	3015	3135	3305
												20 DW	2715	2820	2975
												30 DW	2415	2510	2645
												40 DW	2155	2240	2360
												50 DW	1940	2015	2120
												400/55 - 22.5	AG 11.75	12.25; 13.00; AG 13.00	405
km/h															
10 FR	4675	4825	4970												
20 FR	4210	4340	4475												
30 FR	3740	3860	3975												
40 FR	3340	3445	3550												
50 FR	3005	3100	3150												
10 DW	3290	3395	3500												
20 DW	2960	3055	3150												
30 DW	2630	2715	2800												
40 DW	2350	2425	2500												
50 DW	2115	2185	2240												
500/45 - 22.5	AG 16.00	-	500	1045	471	3167	STD	12	TL	148 A8/144 B	136 A8/132 B				
												km/h			
												10 FR	4020	4215	4410
												20 FR	3615	3795	3970
												30 FR	3215	3370	3530
												40 FR	2870	3010	3150
												50 FR	2585	2710	2800
												10 DW	2855	2995	3135
												20 DW	2570	2695	2820
												30 DW	2285	2395	2510
												40 DW	2040	2140	2240
												50 DW	1835	1925	2000
												500/45 - 22.5	AG 16.00	-	500
km/h															
10 FR	4900	5075	5250												
20 FR	4410	4570	4725												
30 FR	3920	4060	4200												
40 FR	3500	3625	3750												
50 FR	3150	3265	3350												
10 DW	3465	3590	3710												
20 DW	3120	3230	3340												
30 DW	2770	2875	2970												
40 DW	2475	2565	2650												
50 DW	2230	2310	2360												

STD: Standard



**MAIN APPLICATION:
PIVOT IRRIGATOR**



TR 117 (R-1)

TR 117 is ideal for irrigation applications with pivot irrigators. In line with BKT's commitment to design tires that protect the soil, the TR 117 tire has round-shaped lugs to reduce soil damage and protect the precious crops.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
24" 11.2 - 24	W 10	W 9	284	1090	509	3205	STD	4	TT	101 A6	1.20	825
11.2 - 24	W 10	W 9	284	1090	509	3205	STD	4	TL	101 A6	1.20	825
11.2 - 24	W 10	W 9	284	1090	509	3205	STD	6	TT	110 A6	1.80	1060
11.2 - 24	W 10	W 9	284	1090	509	3205	STD	6	TL	110 A6	1.80	1060
13.6 - 24	W 12	W 11	350	1187	-	-	STD	6	TT	119 A6	2.20	1360
14.9 - 24	W 13	W 11; W 12	378	1245	575	3660	STD	4	TT	112 A6	0.80	1120
14.9 - 24	W 13	W 11; W 12	378	1245	575	3660	STD	4	TL	112 A6	0.80	1120
14.9 - 24	W 13	W 11; W 12	378	1245	575	3660	STD	6	TT	123 A6	1.40	1550
14.9 - 24	W 13	W 11; W 12	378	1245	575	3660	STD	6	TL	123 A6	1.40	1550
14.9 - 24	W 13	W 11; W 12	378	1245	575	3660	STD	8	TT	128 A6	1.80	1800
14.9 - 24	W 13	W 11; W 12	378	1245	575	3660	STD	8	TL	128 A6	1.80	1800
14.9 - 24	W 13	W 11; W 12	378	1245	575	3660	HD	8	TL	128 A6	1.80	1800

STD: Standard
HD: Heavy Duty



**MAIN APPLICATION:
PIVOT IRRIGATOR**



TR 117 (R-1)

TR 117 is ideal for irrigation applications with pivot irrigators. In line with BKT's commitment to design tires that protect the soil, the TR 117 tire has round-shaped lugs to reduce soil damage and protect the precious crops.



TRACTION



FIELD PROTECTION



SELF-CLEANING

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
38" 11.2 - 38	W 10	W 9	284	1445	687	4248	STD	4	TT	109 A6	1.30	1030
11.2 - 38	W 10	W 9	284	1445	687	4248	STD	4	TL	109 A6	1.30	1030
11.2 - 38	W 10	W 9	284	1445	687	4248	STD	6	TT	117 A6	1.80	1285
11.2 - 38	W 10	W 9	284	1445	687	4248	STD	6	TL	117 A6	1.80	1285

STD: Standard



TR 118 (R-1)

TR 118 has been engineered for irrigation machinery. Its specially designed tread pattern provides excellent traction and outstanding self-cleaning properties. TR 118 features a particularly deep tread along with a strong nylon casing, which enable a longer service life.



DEEP TREAD



DURABILITY



TRACTION



SELF-CLEANING

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
24" 14.9 - 24	W 13	W 12; W 11	380	1265	566	3742	STD	8	TL	128 A6	1.80	1800

STD: Standard



MAIN APPLICATION:
FLOTATION



RIDEMAX FL 690

RADIAL TRANSPORT TIRES

RIDEMAX FL 690 is a radial flotation and transport tire for tank trucks, trailers and spreaders. The tire is suitable for 75% on-the-road applications. Its special tread design provides outstanding self-cleaning properties in the field. As a response to the increasing demand for high loads in modern agriculture, BKT has designed this steel-belted tire withstanding very heavy loads and increasing the farmer's productivity.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)										
		Rec. 	Alt. 							↓ 										
26" 28L R 26 (750/65 R 26)	176 A8/173 B	DW 25 B	DW 23 B	719	1590	695	4745	750	STD											
										bar		0.8	1.0	1.4	1.6	2.0	2.4	2.8		
										km/h										
										50		3120	3560	4325	4680	5330	5915	6500		
										40		3410	3885	4725	5115	5825	6465	7100		
										30		3820	4355	5295	5730	6525	7240	7955		
25		4060	4625	5620	6085	6930	7690	8450												
10		4775	5440	6615	7160	8155	9050	9940												
32" 30.5L R 32 (800/65 R 32)	181 B	DH 27 B	DW 27 B	790	1800	806	5430	875	STD											
										bar		0.8	1.0	1.4	1.6	2.0	2.4	2.8	3.0	
										km/h										
										50		3795	4375	5280	5695	6520	7260	7920	8250	
										40		4370	5030	6075	6550	7500	8355	9115	9490	
										30		4935	5685	6865	7405	8475	9440	10300	10725	
25		5205	5995	7240	7805	8935	9950	10855	11305											
10		6040	6955	8400	9055	10365	11550	12600	13120											

STD: Standard



MAIN APPLICATION:
FLOTATION



RIDEMAX FL 693 M

RADIAL TRANSPORT TIRES

RIDEMAX FL 693 M is the ideal radial tire for those who frequently travel on the road with trailers/tank trucks. Actually designed mainly for on-the-road use, RIDEMAX FL 693 M provides excellent road performance prioritizing both comfort and self-cleaning properties. The speed index classes D/E of the range stands for higher speeds when travelling on the road leading to significant time savings. The low rolling resistance contributes to less fuel consumption.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)																																																																																																	
		Rec.	Alt.																																																																																																								
17" 500/50 R 17	149 D/146 E	16.00	-	503	932	424	2833	450	STD	<table border="1"> <thead> <tr> <th>bar</th> <th>1.0</th><th>1.2</th><th>1.6</th><th>2.0</th><th>2.4</th><th>2.8</th><th>3.2</th><th>3.6</th><th>4.0</th><th>5.0</th> </tr> </thead> <tbody> <tr> <td>km/h</td> <td>990</td><td>1110</td><td>1350</td><td>1530</td><td>1770</td><td>2010</td><td>2220</td><td>2430</td><td>2670</td><td>3000</td> </tr> <tr> <td>70</td> <td>990</td><td>1110</td><td>1350</td><td>1530</td><td>1770</td><td>2010</td><td>2220</td><td>2430</td><td>2670</td><td>3000</td> </tr> <tr> <td>65</td> <td>1075</td><td>1205</td><td>1465</td><td>1660</td><td>1920</td><td>2180</td><td>2405</td><td>2635</td><td>2895</td><td>3250</td> </tr> <tr> <td>50</td> <td>1305</td><td>1460</td><td>1775</td><td>2010</td><td>2325</td><td>2640</td><td>2915</td><td>3190</td><td>3505</td><td>3935</td> </tr> <tr> <td>40</td> <td>1465</td><td>1640</td><td>1990</td><td>2255</td><td>2610</td><td>2965</td><td>3275</td><td>3585</td><td>3935</td><td>4420</td> </tr> <tr> <td>25</td> <td>1695</td><td>1900</td><td>2315</td><td>2620</td><td>3030</td><td>3445</td><td>3800</td><td>4160</td><td>4575</td><td>5135</td> </tr> <tr> <td>10</td> <td>1935</td><td>2165</td><td>2635</td><td>2985</td><td>3455</td><td>3920</td><td>4330</td><td>4740</td><td>5210</td><td>5850</td> </tr> </tbody> </table>										bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	5.0	km/h	990	1110	1350	1530	1770	2010	2220	2430	2670	3000	70	990	1110	1350	1530	1770	2010	2220	2430	2670	3000	65	1075	1205	1465	1660	1920	2180	2405	2635	2895	3250	50	1305	1460	1775	2010	2325	2640	2915	3190	3505	3935	40	1465	1640	1990	2255	2610	2965	3275	3585	3935	4420	25	1695	1900	2315	2620	3030	3445	3800	4160	4575	5135	10	1935	2165	2635	2985	3455	3920	4330	4740	5210	5850
										bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	5.0																																																																																							
										km/h	990	1110	1350	1530	1770	2010	2220	2430	2670	3000																																																																																							
										70	990	1110	1350	1530	1770	2010	2220	2430	2670	3000																																																																																							
										65	1075	1205	1465	1660	1920	2180	2405	2635	2895	3250																																																																																							
										50	1305	1460	1775	2010	2325	2640	2915	3190	3505	3935																																																																																							
										40	1465	1640	1990	2255	2610	2965	3275	3585	3935	4420																																																																																							
										25	1695	1900	2315	2620	3030	3445	3800	4160	4575	5135																																																																																							
10	1935	2165	2635	2985	3455	3920	4330	4740	5210	5850																																																																																																	
22.5" 500/45 R 22.5	146 D/143 E	AG 16.00	-	503	1022	455	3114	500	STD	<table border="1"> <thead> <tr> <th>bar</th> <th>1.0</th><th>1.2</th><th>1.6</th><th>2.0</th><th>2.4</th><th>2.8</th><th>3.2</th><th>3.6</th><th>4.0</th><th></th> </tr> </thead> <tbody> <tr> <td>km/h</td> <td>1000</td><td>1120</td><td>1390</td><td>1585</td><td>1830</td><td>2075</td><td>2265</td><td>2480</td><td>2725</td><td></td> </tr> <tr> <td>70</td> <td>1000</td><td>1120</td><td>1390</td><td>1585</td><td>1830</td><td>2075</td><td>2265</td><td>2480</td><td>2725</td><td></td> </tr> <tr> <td>65</td> <td>1095</td><td>1230</td><td>1530</td><td>1740</td><td>2010</td><td>2280</td><td>2490</td><td>2730</td><td>3000</td><td></td> </tr> <tr> <td>50</td> <td>1330</td><td>1490</td><td>1855</td><td>2110</td><td>2435</td><td>2760</td><td>3015</td><td>3305</td><td>3630</td><td></td> </tr> <tr> <td>40</td> <td>1495</td><td>1675</td><td>2085</td><td>2370</td><td>2735</td><td>3105</td><td>3390</td><td>3715</td><td>4080</td><td></td> </tr> <tr> <td>25</td> <td>1735</td><td>1945</td><td>2420</td><td>2750</td><td>3180</td><td>3605</td><td>3935</td><td>4315</td><td>4740</td><td></td> </tr> <tr> <td>10</td> <td>1975</td><td>2215</td><td>2755</td><td>3135</td><td>3620</td><td>4105</td><td>4485</td><td>4915</td><td>5400</td><td></td> </tr> </tbody> </table>										bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0		km/h	1000	1120	1390	1585	1830	2075	2265	2480	2725		70	1000	1120	1390	1585	1830	2075	2265	2480	2725		65	1095	1230	1530	1740	2010	2280	2490	2730	3000		50	1330	1490	1855	2110	2435	2760	3015	3305	3630		40	1495	1675	2085	2370	2735	3105	3390	3715	4080		25	1735	1945	2420	2750	3180	3605	3935	4315	4740		10	1975	2215	2755	3135	3620	4105	4485	4915	5400	
										bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0																																																																																								
										km/h	1000	1120	1390	1585	1830	2075	2265	2480	2725																																																																																								
										70	1000	1120	1390	1585	1830	2075	2265	2480	2725																																																																																								
										65	1095	1230	1530	1740	2010	2280	2490	2730	3000																																																																																								
										50	1330	1490	1855	2110	2435	2760	3015	3305	3630																																																																																								
										40	1495	1675	2085	2370	2735	3105	3390	3715	4080																																																																																								
										25	1735	1945	2420	2750	3180	3605	3935	4315	4740																																																																																								
10	1975	2215	2755	3135	3620	4105	4485	4915	5400																																																																																																		
500/60 R 22.5	155 D/152 E	AG 16.00	15.00; 17.00	503	1172	531	3577	550	STD	<table border="1"> <thead> <tr> <th>bar</th> <th>1.0</th><th>1.2</th><th>1.6</th><th>2.0</th><th>2.4</th><th>2.8</th><th>3.2</th><th>3.6</th><th>4.0</th><th></th> </tr> </thead> <tbody> <tr> <td>km/h</td> <td>1320</td><td>1495</td><td>1775</td><td>2095</td><td>2400</td><td>2665</td><td>2985</td><td>3270</td><td>3550</td><td></td> </tr> <tr> <td>70</td> <td>1320</td><td>1495</td><td>1775</td><td>2095</td><td>2400</td><td>2665</td><td>2985</td><td>3270</td><td>3550</td><td></td> </tr> <tr> <td>65</td> <td>1435</td><td>1630</td><td>1940</td><td>2290</td><td>2620</td><td>2910</td><td>3255</td><td>3565</td><td>3875</td><td></td> </tr> <tr> <td>50</td> <td>1740</td><td>1970</td><td>2345</td><td>2770</td><td>3170</td><td>3520</td><td>3940</td><td>4315</td><td>4690</td><td></td> </tr> <tr> <td>40</td> <td>1955</td><td>2215</td><td>2635</td><td>3110</td><td>3560</td><td>3955</td><td>4430</td><td>4850</td><td>5270</td><td></td> </tr> <tr> <td>25</td> <td>2270</td><td>2575</td><td>3065</td><td>3615</td><td>4135</td><td>4595</td><td>5145</td><td>5635</td><td>6125</td><td></td> </tr> <tr> <td>10</td> <td>2585</td><td>2930</td><td>3490</td><td>4120</td><td>4710</td><td>5235</td><td>5860</td><td>6420</td><td>6975</td><td></td> </tr> </tbody> </table>										bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0		km/h	1320	1495	1775	2095	2400	2665	2985	3270	3550		70	1320	1495	1775	2095	2400	2665	2985	3270	3550		65	1435	1630	1940	2290	2620	2910	3255	3565	3875		50	1740	1970	2345	2770	3170	3520	3940	4315	4690		40	1955	2215	2635	3110	3560	3955	4430	4850	5270		25	2270	2575	3065	3615	4135	4595	5145	5635	6125		10	2585	2930	3490	4120	4710	5235	5860	6420	6975	
										bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0																																																																																								
										km/h	1320	1495	1775	2095	2400	2665	2985	3270	3550																																																																																								
										70	1320	1495	1775	2095	2400	2665	2985	3270	3550																																																																																								
										65	1435	1630	1940	2290	2620	2910	3255	3565	3875																																																																																								
										50	1740	1970	2345	2770	3170	3520	3940	4315	4690																																																																																								
										40	1955	2215	2635	3110	3560	3955	4430	4850	5270																																																																																								
										25	2270	2575	3065	3615	4135	4595	5145	5635	6125																																																																																								
10	2585	2930	3490	4120	4710	5235	5860	6420	6975																																																																																																		
560/45 R 22.5	152 D/149 E	AG 16.00	-	543	1076	484	3270	525	STD	<table border="1"> <thead> <tr> <th>bar</th> <th>1.0</th><th>1.2</th><th>1.6</th><th>2.0</th><th>2.4</th><th>2.8</th><th>3.2</th><th>3.6</th><th>4.0</th><th></th> </tr> </thead> <tbody> <tr> <td>km/h</td> <td>1205</td><td>1365</td><td>1625</td><td>1920</td><td>2195</td><td>2440</td><td>2730</td><td>2990</td><td>3250</td><td></td> </tr> <tr> <td>70</td> <td>1205</td><td>1365</td><td>1625</td><td>1920</td><td>2195</td><td>2440</td><td>2730</td><td>2990</td><td>3250</td><td></td> </tr> <tr> <td>65</td> <td>1320</td><td>1495</td><td>1775</td><td>2095</td><td>2400</td><td>2665</td><td>2985</td><td>3270</td><td>3550</td><td></td> </tr> <tr> <td>50</td> <td>1595</td><td>1810</td><td>2150</td><td>2540</td><td>2905</td><td>3225</td><td>3615</td><td>3960</td><td>4300</td><td></td> </tr> <tr> <td>40</td> <td>1790</td><td>2030</td><td>2415</td><td>2850</td><td>3265</td><td>3625</td><td>4060</td><td>4445</td><td>4830</td><td></td> </tr> <tr> <td>25</td> <td>2080</td><td>2360</td><td>2805</td><td>3310</td><td>3790</td><td>4210</td><td>4715</td><td>5165</td><td>5610</td><td></td> </tr> <tr> <td>10</td> <td>2365</td><td>2685</td><td>3195</td><td>3775</td><td>4315</td><td>4795</td><td>5370</td><td>5880</td><td>6390</td><td></td> </tr> </tbody> </table>										bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0		km/h	1205	1365	1625	1920	2195	2440	2730	2990	3250		70	1205	1365	1625	1920	2195	2440	2730	2990	3250		65	1320	1495	1775	2095	2400	2665	2985	3270	3550		50	1595	1810	2150	2540	2905	3225	3615	3960	4300		40	1790	2030	2415	2850	3265	3625	4060	4445	4830		25	2080	2360	2805	3310	3790	4210	4715	5165	5610		10	2365	2685	3195	3775	4315	4795	5370	5880	6390	
										bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0																																																																																								
										km/h	1205	1365	1625	1920	2195	2440	2730	2990	3250																																																																																								
										70	1205	1365	1625	1920	2195	2440	2730	2990	3250																																																																																								
										65	1320	1495	1775	2095	2400	2665	2985	3270	3550																																																																																								
										50	1595	1810	2150	2540	2905	3225	3615	3960	4300																																																																																								
										40	1790	2030	2415	2850	3265	3625	4060	4445	4830																																																																																								
										25	2080	2360	2805	3310	3790	4210	4715	5165	5610																																																																																								
10	2365	2685	3195	3775	4315	4795	5370	5880	6390																																																																																																		
560/55 R 22.5	158 D/155 E	AG 16.00	17.00; 20.00	543	1180	533	3614	550	STD	<table border="1"> <thead> <tr> <th>bar</th> <th>1.0</th><th>1.2</th><th>1.6</th><th>2.0</th><th>2.4</th><th>2.8</th><th>3.2</th><th>3.6</th><th>4.0</th><th></th> </tr> </thead> <tbody> <tr> <td>km/h</td> <td>1435</td><td>1630</td><td>1940</td><td>2290</td><td>2620</td><td>2910</td><td>3255</td><td>3565</td><td>3875</td><td></td> </tr> <tr> <td>70</td> <td>1435</td><td>1630</td><td>1940</td><td>2290</td><td>2620</td><td>2910</td><td>3255</td><td>3565</td><td>3875</td><td></td> </tr> <tr> <td>65</td> <td>1575</td><td>1785</td><td>2125</td><td>2510</td><td>2870</td><td>3190</td><td>3570</td><td>3910</td><td>4250</td><td></td> </tr> <tr> <td>50</td> <td>1910</td><td>2165</td><td>2575</td><td>3040</td><td>3475</td><td>3860</td><td>4325</td><td>4735</td><td>5145</td><td></td> </tr> <tr> <td>40</td> <td>2140</td><td>2430</td><td>2890</td><td>3415</td><td>3905</td><td>4335</td><td>4860</td><td>5320</td><td>5780</td><td></td> </tr> <tr> <td>25</td> <td>2490</td><td>2825</td><td>3360</td><td>3965</td><td>4535</td><td>5040</td><td>5645</td><td>6180</td><td>6715</td><td></td> </tr> <tr> <td>10</td> <td>2835</td><td>3215</td><td>3825</td><td>4515</td><td>5165</td><td>5740</td><td>6430</td><td>7040</td><td>7650</td><td></td> </tr> </tbody> </table>										bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0		km/h	1435	1630	1940	2290	2620	2910	3255	3565	3875		70	1435	1630	1940	2290	2620	2910	3255	3565	3875		65	1575	1785	2125	2510	2870	3190	3570	3910	4250		50	1910	2165	2575	3040	3475	3860	4325	4735	5145		40	2140	2430	2890	3415	3905	4335	4860	5320	5780		25	2490	2825	3360	3965	4535	5040	5645	6180	6715		10	2835	3215	3825	4515	5165	5740	6430	7040	7650	
										bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0																																																																																								
										km/h	1435	1630	1940	2290	2620	2910	3255	3565	3875																																																																																								
										70	1435	1630	1940	2290	2620	2910	3255	3565	3875																																																																																								
										65	1575	1785	2125	2510	2870	3190	3570	3910	4250																																																																																								
										50	1910	2165	2575	3040	3475	3860	4325	4735	5145																																																																																								
										40	2140	2430	2890	3415	3905	4335	4860	5320	5780																																																																																								
										25	2490	2825	3360	3965	4535	5040	5645	6180	6715																																																																																								
10	2835	3215	3825	4515	5165	5740	6430	7040	7650																																																																																																		

STD: Standard



MAIN APPLICATION:
FLOTATION



RIDEMAX FL 693 M

RADIAL TRANSPORT TIRES

RIDEMAX FL 693 M is the ideal radial tire for those who frequently travel on the road with trailers/tank trucks. Actually designed mainly for on-the-road use, RIDEMAX FL 693 M provides excellent road performance prioritizing both comfort and self-cleaning properties. The speed index classes D/E of the range stands for higher speeds when travelling on the road leading to significant time savings. The low rolling resistance contributes to less fuel consumption.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)											
		Rec.	Alt.																		
22.5" 560/60 R 22.5	161 D/158 E	AG 16.00	16.00; 17.00; AG 20.00	543	1244	549	3767	600	STD	bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0		
										km/h	70	1555	1745	2170	2465	2850	3230	3530	3870	4250	
										65	1690	1900	2360	2685	3100	3515	3840	4210	4625		
										50	2050	2300	2860	3250	3755	4260	4650	5100	5600		
										40	2300	2580	3210	3650	4215	4785	5225	5725	6290		
										25	2670	3000	3730	4240	4900	5560	6070	6655	7310		
										10	3040	3415	4250	4830	5580	6330	6910	7580	8325		
										560/60 R 22.5	165 D/162 E	AG 16.00	16.00; 17.00; AG 20.00	543	1244	549	3767	600	STD	bar	1.0
km/h	70	1555	1745	2170	2465	2850	3230	3530	3870											4250	4750
65	1690	1900	2360	2685	3100	3515	3840	4210	4625											5150	
50	2050	2300	2860	3250	3755	4260	4650	5100	5600											6235	
40	2300	2580	3210	3650	4215	4785	5225	5725	6290											7005	
25	2670	3000	3730	4240	4900	5560	6070	6655	7310											8140	
10	3040	3415	4250	4830	5580	6330	6910	7580	8325											9270	
580/65 R 22.5	166 D/163 E	AG 18.00	AG 16.00; AG 17.00; AG 20.00	577	1326	572	4031	625	STD											bar	1.0
										km/h	70	1805	2050	2440	2880	3295	3660	4095	4485	4875	
										65	1965	2230	2650	3130	3580	3975	4455	4880	5300		
										50	2375	2695	3210	3785	4335	4815	5390	5905	6415		
										40	2670	3030	3605	4255	4870	5410	6060	6635	7210		
										25	3100	3520	4190	4945	5655	6285	7035	7705	8375		
										10	3535	4010	4770	5630	6440	7155	8015	8780	9540		
										600/50 R 22.5	159 D/156 E	AG 20.00	-	611	1172	516	3546	550	STD	bar	1.0
km/h	70	1480	1680	2040	2360	2720	3080	3320	3680											4000	
65	1620	1840	2235	2585	2975	3370	3635	4025	4375												
50	1960	2225	2705	3125	3605	4080	4395	4875	5295												
40	2205	2500	3035	3515	4050	4585	4940	5475	5950												
25	2560	2905	3530	4080	4705	5325	5740	6365	6915												
10	2915	3310	4020	4650	5355	6065	6540	7245	7875												
650/50 R 22.5	163 D/160 E	AG 20.00	-	645	1222	535	3715	575	STD											bar	1.0
										km/h	70	1645	1845	2295	2610	3015	3420	3735	4095	4500	
										65	1780	2000	2490	2830	3270	3705	4050	4440	4875		
										50	2155	2420	3010	3425	3955	4485	4900	5370	5900		
										40	2425	2720	3385	3850	4445	5040	5505	6035	6630		
										25	2815	3160	3930	4470	5165	5860	6400	7015	7705		
										10	3205	3600	4480	5090	5880	6670	7285	7990	8775		

STD: Standard



MAIN APPLICATION:
FLOTATION



RIDEMAX FL 693 M

RADIAL TRANSPORT TIRES

RIDEMAX FL 693 M is the ideal radial tire for those who frequently travel on the road with trailers/tank trucks. Actually designed mainly for on-the-road use, RIDEMAX FL 693 M provides excellent road performance prioritizing both comfort and self-cleaning properties. The speed index classes D/E of the range stands for higher speeds when travelling on the road leading to significant time savings. The low rolling resistance contributes to less fuel consumption.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)																																																																																																									
		Rec.	Alt.																																																																																																																
26.5" 600/55 R 26.5	165 D	AG 20.00	-	611	1333	586	4051	625	STD	<table border="1"> <thead> <tr> <th>bar</th> <th>1.0</th> <th>1.2</th> <th>1.6</th> <th>2.0</th> <th>2.4</th> <th>2.8</th> <th>3.2</th> <th>3.6</th> <th>4.0</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>km/h</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>70</td> <td>1740</td><td>1970</td><td>2395</td><td>2770</td><td>3190</td><td>3615</td><td>3895</td><td>4315</td><td>4690</td> <td></td><td></td> </tr> <tr> <td>65</td> <td>1910</td><td>2165</td><td>2630</td><td>3040</td><td>3505</td><td>3970</td><td>4275</td><td>4740</td><td>5150</td> <td></td><td></td> </tr> <tr> <td>50</td> <td>2310</td><td>2620</td><td>3180</td><td>3680</td><td>4240</td><td>4805</td><td>5180</td><td>5740</td><td>6235</td> <td></td><td></td> </tr> <tr> <td>40</td> <td>2595</td><td>2945</td><td>3575</td><td>4135</td><td>4765</td><td>5395</td><td>5815</td><td>6445</td><td>7005</td> <td></td><td></td> </tr> <tr> <td>25</td> <td>3015</td><td>3420</td><td>4155</td><td>4805</td><td>5540</td><td>6270</td><td>6760</td><td>7490</td><td>8140</td> <td></td><td></td> </tr> <tr> <td>10</td> <td>3435</td><td>3895</td><td>4730</td><td>5470</td><td>6305</td><td>7140</td><td>7695</td><td>8530</td><td>9270</td> <td></td><td></td> </tr> </tbody> </table>										bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0			km/h												70	1740	1970	2395	2770	3190	3615	3895	4315	4690			65	1910	2165	2630	3040	3505	3970	4275	4740	5150			50	2310	2620	3180	3680	4240	4805	5180	5740	6235			40	2595	2945	3575	4135	4765	5395	5815	6445	7005			25	3015	3420	4155	4805	5540	6270	6760	7490	8140			10	3435	3895	4730	5470	6305	7140	7695	8530	9270		
										bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0																																																																																																
										km/h																																																																																																									
										70	1740	1970	2395	2770	3190	3615	3895	4315	4690																																																																																																
										65	1910	2165	2630	3040	3505	3970	4275	4740	5150																																																																																																
										50	2310	2620	3180	3680	4240	4805	5180	5740	6235																																																																																																
										40	2595	2945	3575	4135	4765	5395	5815	6445	7005																																																																																																
										25	3015	3420	4155	4805	5540	6270	6760	7490	8140																																																																																																
10	3435	3895	4730	5470	6305	7140	7695	8530	9270																																																																																																										
600/55 R 26.5	177 D	AG 20.00	-	611	1333	584	4077	625	HD	<table border="1"> <thead> <tr> <th>bar</th> <th>1.0</th> <th>1.2</th> <th>1.6</th> <th>2.0</th> <th>2.4</th> <th>2.8</th> <th>3.2</th> <th>3.6</th> <th>4.0</th> <th>5.0</th> <th>6.0</th> </tr> </thead> <tbody> <tr> <td>km/h</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>65</td> <td>2265</td><td>2705</td><td>3285</td><td>3800</td><td>4380</td><td>4965</td><td>5330</td><td>5915</td><td>6500</td><td>6865</td><td>7300</td> </tr> <tr> <td>50</td> <td>2740</td><td>3270</td><td>3980</td><td>4595</td><td>5305</td><td>6010</td><td>6450</td><td>7160</td><td>7865</td><td>8305</td><td>8835</td> </tr> <tr> <td>40</td> <td>3080</td><td>3675</td><td>4470</td><td>5165</td><td>5960</td><td>6755</td><td>7250</td><td>8045</td><td>8840</td><td>9335</td><td>9930</td> </tr> <tr> <td>30</td> <td>3420</td><td>4080</td><td>4965</td><td>5735</td><td>6615</td><td>7500</td><td>8050</td><td>8935</td><td>9815</td><td>10365</td><td>11025</td> </tr> <tr> <td>25</td> <td>3580</td><td>4270</td><td>5195</td><td>6000</td><td>6925</td><td>7845</td><td>8425</td><td>9345</td><td>10270</td><td>10845</td><td>11535</td> </tr> <tr> <td>10</td> <td>4075</td><td>4865</td><td>5915</td><td>6835</td><td>7885</td><td>8940</td><td>9595</td><td>10645</td><td>11695</td><td>12355</td><td>13140</td> </tr> </tbody> </table>										bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	5.0	6.0	km/h												65	2265	2705	3285	3800	4380	4965	5330	5915	6500	6865	7300	50	2740	3270	3980	4595	5305	6010	6450	7160	7865	8305	8835	40	3080	3675	4470	5165	5960	6755	7250	8045	8840	9335	9930	30	3420	4080	4965	5735	6615	7500	8050	8935	9815	10365	11025	25	3580	4270	5195	6000	6925	7845	8425	9345	10270	10845	11535	10	4075	4865	5915	6835	7885	8940	9595	10645	11695	12355	13140
										bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	5.0	6.0																																																																																														
										km/h																																																																																																									
										65	2265	2705	3285	3800	4380	4965	5330	5915	6500	6865	7300																																																																																														
										50	2740	3270	3980	4595	5305	6010	6450	7160	7865	8305	8835																																																																																														
										40	3080	3675	4470	5165	5960	6755	7250	8045	8840	9335	9930																																																																																														
										30	3420	4080	4965	5735	6615	7500	8050	8935	9815	10365	11025																																																																																														
										25	3580	4270	5195	6000	6925	7845	8425	9345	10270	10845	11535																																																																																														
10	4075	4865	5915	6835	7885	8940	9595	10645	11695	12355	13140																																																																																																								
650/55 R 26.5	169 D	AG 20.00	-	645	1389	608	4216	650	STD	<table border="1"> <thead> <tr> <th>bar</th> <th>1.0</th> <th>1.2</th> <th>1.6</th> <th>2.0</th> <th>2.4</th> <th>2.8</th> <th>3.2</th> <th>3.6</th> <th>4.0</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>km/h</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>70</td> <td>1965</td><td>2230</td><td>2705</td><td>3130</td><td>3605</td><td>4085</td><td>4400</td><td>4880</td><td>5300</td> <td></td><td></td> </tr> <tr> <td>65</td> <td>2150</td><td>2440</td><td>2960</td><td>3425</td><td>3945</td><td>4470</td><td>4815</td><td>5340</td><td>5800</td> <td></td><td></td> </tr> <tr> <td>50</td> <td>2600</td><td>2950</td><td>3585</td><td>4145</td><td>4775</td><td>5410</td><td>5830</td><td>6460</td><td>7020</td> <td></td><td></td> </tr> <tr> <td>40</td> <td>2920</td><td>3315</td><td>4025</td><td>4660</td><td>5370</td><td>6080</td><td>6550</td><td>7260</td><td>7890</td> <td></td><td></td> </tr> <tr> <td>25</td> <td>3395</td><td>3850</td><td>4675</td><td>5410</td><td>6235</td><td>7060</td><td>7610</td><td>8435</td><td>9165</td> <td></td><td></td> </tr> <tr> <td>10</td> <td>3865</td><td>4385</td><td>5325</td><td>6160</td><td>7100</td><td>8040</td><td>8670</td><td>9605</td><td>10440</td> <td></td><td></td> </tr> </tbody> </table>										bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0			km/h												70	1965	2230	2705	3130	3605	4085	4400	4880	5300			65	2150	2440	2960	3425	3945	4470	4815	5340	5800			50	2600	2950	3585	4145	4775	5410	5830	6460	7020			40	2920	3315	4025	4660	5370	6080	6550	7260	7890			25	3395	3850	4675	5410	6235	7060	7610	8435	9165			10	3865	4385	5325	6160	7100	8040	8670	9605	10440		
										bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0																																																																																																
										km/h																																																																																																									
										70	1965	2230	2705	3130	3605	4085	4400	4880	5300																																																																																																
										65	2150	2440	2960	3425	3945	4470	4815	5340	5800																																																																																																
										50	2600	2950	3585	4145	4775	5410	5830	6460	7020																																																																																																
										40	2920	3315	4025	4660	5370	6080	6550	7260	7890																																																																																																
										25	3395	3850	4675	5410	6235	7060	7610	8435	9165																																																																																																
10	3865	4385	5325	6160	7100	8040	8670	9605	10440																																																																																																										
650/55 R 26.5	178 D	AG 20.00	-	645	1389	609	4250	650	HD	<table border="1"> <thead> <tr> <th>bar</th> <th>1.0</th> <th>1.2</th> <th>1.6</th> <th>2.0</th> <th>2.4</th> <th>2.8</th> <th>3.2</th> <th>3.6</th> <th>4.0</th> <th>5.0</th> <th>6.0</th> </tr> </thead> <tbody> <tr> <td>km/h</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>65</td> <td>2325</td><td>2775</td><td>3375</td><td>3900</td><td>4500</td><td>5100</td><td>5475</td><td>6075</td><td>6675</td><td>7050</td><td>7500</td> </tr> <tr> <td>50</td> <td>2815</td><td>3360</td><td>4085</td><td>4720</td><td>5445</td><td>6175</td><td>6625</td><td>7355</td><td>8080</td><td>8535</td><td>9075</td> </tr> <tr> <td>40</td> <td>3165</td><td>3775</td><td>4590</td><td>5305</td><td>6120</td><td>6940</td><td>7450</td><td>8265</td><td>9080</td><td>9590</td><td>10200</td> </tr> <tr> <td>30</td> <td>3515</td><td>4195</td><td>5100</td><td>5890</td><td>6795</td><td>7705</td><td>8270</td><td>9175</td><td>10080</td><td>10650</td><td>11325</td> </tr> <tr> <td>25</td> <td>3675</td><td>4385</td><td>5335</td><td>6165</td><td>7110</td><td>8060</td><td>8655</td><td>9600</td><td>10550</td><td>11140</td><td>11850</td> </tr> <tr> <td>10</td> <td>4185</td><td>4995</td><td>6075</td><td>7020</td><td>8100</td><td>9180</td><td>9855</td><td>10935</td><td>12015</td><td>12690</td><td>13500</td> </tr> </tbody> </table>										bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	5.0	6.0	km/h												65	2325	2775	3375	3900	4500	5100	5475	6075	6675	7050	7500	50	2815	3360	4085	4720	5445	6175	6625	7355	8080	8535	9075	40	3165	3775	4590	5305	6120	6940	7450	8265	9080	9590	10200	30	3515	4195	5100	5890	6795	7705	8270	9175	10080	10650	11325	25	3675	4385	5335	6165	7110	8060	8655	9600	10550	11140	11850	10	4185	4995	6075	7020	8100	9180	9855	10935	12015	12690	13500
										bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	5.0	6.0																																																																																														
										km/h																																																																																																									
										65	2325	2775	3375	3900	4500	5100	5475	6075	6675	7050	7500																																																																																														
										50	2815	3360	4085	4720	5445	6175	6625	7355	8080	8535	9075																																																																																														
										40	3165	3775	4590	5305	6120	6940	7450	8265	9080	9590	10200																																																																																														
										30	3515	4195	5100	5890	6795	7705	8270	9175	10080	10650	11325																																																																																														
										25	3675	4385	5335	6165	7110	8060	8655	9600	10550	11140	11850																																																																																														
10	4185	4995	6075	7020	8100	9180	9855	10935	12015	12690	13500																																																																																																								
710/50 R 26.5	170 D	AG 24.00	AG 20.00	727	1383	606	4174	650	STD	<table border="1"> <thead> <tr> <th>bar</th> <th>1.0</th> <th>1.2</th> <th>1.6</th> <th>2.0</th> <th>2.4</th> <th>2.8</th> <th>3.2</th> <th>3.6</th> <th>4.0</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>km/h</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>70</td> <td>2020</td><td>2290</td><td>2780</td><td>3220</td><td>3710</td><td>4200</td><td>4525</td><td>5015</td><td>5450</td> <td></td><td></td> </tr> <tr> <td>65</td> <td>2220</td><td>2520</td><td>3060</td><td>3540</td><td>4080</td><td>4620</td><td>4980</td><td>5520</td><td>6000</td> <td></td><td></td> </tr> <tr> <td>50</td> <td>2690</td><td>3050</td><td>3705</td><td>4285</td><td>4940</td><td>5595</td><td>6030</td><td>6680</td><td>7260</td> <td></td><td></td> </tr> <tr> <td>40</td> <td>3025</td><td>3430</td><td>4165</td><td>4815</td><td>5550</td><td>6285</td><td>6775</td><td>7510</td><td>8160</td> <td></td><td></td> </tr> <tr> <td>25</td> <td>3510</td><td>3985</td><td>4835</td><td>5595</td><td>6450</td><td>7300</td><td>7870</td><td>8725</td><td>9480</td> <td></td><td></td> </tr> <tr> <td>10</td> <td>4000</td><td>4540</td><td>5510</td><td>6375</td><td>7345</td><td>8320</td><td>8965</td><td>9940</td><td>10800</td> <td></td><td></td> </tr> </tbody> </table>										bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0			km/h												70	2020	2290	2780	3220	3710	4200	4525	5015	5450			65	2220	2520	3060	3540	4080	4620	4980	5520	6000			50	2690	3050	3705	4285	4940	5595	6030	6680	7260			40	3025	3430	4165	4815	5550	6285	6775	7510	8160			25	3510	3985	4835	5595	6450	7300	7870	8725	9480			10	4000	4540	5510	6375	7345	8320	8965	9940	10800		
										bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0																																																																																																
										km/h																																																																																																									
										70	2020	2290	2780	3220	3710	4200	4525	5015	5450																																																																																																
										65	2220	2520	3060	3540	4080	4620	4980	5520	6000																																																																																																
										50	2690	3050	3705	4285	4940	5595	6030	6680	7260																																																																																																
										40	3025	3430	4165	4815	5550	6285	6775	7510	8160																																																																																																
										25	3510	3985	4835	5595	6450	7300	7870	8725	9480																																																																																																
10	4000	4540	5510	6375	7345	8320	8965	9940	10800																																																																																																										

STD: Standard
HD: Heavy Duty



MAIN APPLICATION:
FLOTATION



RIDEMAX FL 693 M

RADIAL TRANSPORT TIRES

RIDEMAX FL 693 M is the ideal radial tire for those who frequently travel on the road with trailers/tank trucks. Actually designed mainly for on-the-road use, RIDEMAX FL 693 M provides excellent road performance prioritizing both comfort and self-cleaning properties. The speed index classes D/E of the range stands for higher speeds when travelling on the road leading to significant time savings. The low rolling resistance contributes to less fuel consumption.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)									
		Rec.	Alt.																
30.5" 710/50 R 30.5	173 D	AG 24.00	AG 20.00	727	1485	656	4510	700	STD										
										bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
										km/h	2220	2520	3060	3540	4080	4620	4980	5520	6000
										70	2405	2730	3315	3835	4420	5005	5395	5980	6500
										65	2915	3305	4015	4645	5350	6060	6530	7240	7865
										40	3275	3715	4510	5220	6015	6810	7340	8135	8840
										25	3805	4315	5240	6060	6985	7910	8525	9450	10270
										10	4330	4915	5970	6905	7960	9010	9715	10765	11700
750/60 R 30.5	181 D	AG 24.00	-	754	1675	728	5092	800	STD										
										bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
										km/h	2780	3155	3835	4435	5110	5785	6235	6910	7510
										70	3055	3465	4210	4870	5610	6355	6850	7590	8250
										65	3700	4195	5095	5895	6790	7690	8290	9190	9985
										40	4155	4715	5725	6620	7630	8640	9315	10325	11220
										25	4825	5475	6650	7695	8865	10040	10820	11995	13035
										10	5500	6240	7575	8765	10100	11435	12330	13665	14850
850/50 R 30.5	182 D	AG 28.00	-	862	1625	719	4925	725	STD										
										bar	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
										km/h	2865	3250	3945	4565	5260	5960	6425	7120	7735
										70	3145	3570	4335	5015	5780	6545	7055	7820	8500
										65	3810	4320	5250	6070	6995	7920	8540	9465	10285
										40	4280	4860	5900	6825	7865	8905	9595	10640	11560
										25	4975	5645	6850	7925	9135	10345	11150	12360	13430
										10	5665	6430	7805	9030	10405	11785	12700	14080	15300

STD: Standard



**MAIN APPLICATION:
FLOTATION**



FL 630 PLUS

FL 630 PLUS is a radial flotation and transport tire mainly for field use and particularly suitable also for spreading. Its tread pattern features excellent self-cleaning properties in all the conditions of use and reduces soil compaction preserving the value of the crops.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)											
		Rec.	Alt.							↓											
22.5" 560/45 R 22.5 (550/45 R 22.5)	152 D/163 A8	AG 16.00	-	543	1076	484	3303	525	STD	bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	
										km/h	70	1040	1200	1360	1620	1910	2170	2430	2720	2980	3235
										65	1140	1320	1495	1790	2095	2380	2700	2960	3270	3550	
										50	1380	1595	1810	2150	2450	2900	3240	3615	3960	4300	
										40	1560	1805	2050	2450	2880	3270	3675	4090	4485	4875	
										25	1800	2080	2360	2820	3310	3775	4230	4700	5165	5610	
										10	2045	2365	2685	3200	3775	4300	4820	5350	5880	6390	
										560/60 R 22.5 (550/60 R 22.5)	161 D/172 A8	AG 16.00	16.00; 17.00; AG 20.00	543	1244	550	3807	600	STD	bar	0.8
km/h	70	1350	1560	1770	2105	2485	2845	3160	3540											3875	4210
65	1480	1715	1945	2315	2730	3100	3500	3870	4255											4625	
50	1795	2075	2355	2820	3300	3770	4210	4700	5155											5600	
40	2020	2335	2650	3150	3720	4240	4765	5280	5800											6300	
25	2340	2710	3075	3670	4315	4920	5520	6110	6730											7310	
10	2665	3085	3500	4165	4915	5620	6260	6980	7660											8325	
600/50 R 22.5	159 D/170 A8	AG 20.00	-	611	1172	521	3592	550	STD											bar	0.8
										km/h	70	1280	1480	1675	2020	2355	2650	3020	3330	3670	3985
										65	1400	1620	1840	2220	2585	2950	3310	3660	4025	4375	
										50	1695	1960	2225	2700	3125	3575	4000	4420	4875	5295	
										40	1920	2220	2520	3040	3540	4050	4555	5020	5520	6000	
										25	2215	2560	2905	3510	4080	4675	5210	5800	6365	6915	
										10	2520	2915	3310	4000	4650	5325	5940	6600	7245	7875	
										710/40 R 22.5	161 D/172 A8	AG 24.00	-	727	1140	509	3500	550	STD	bar	0.8
km/h	70	1350	1560	1770	2105	2485	2845	3160	3540											3875	4210
65	1480	1715	1945	2320	2730	3100	3500	3870	4255											4625	
50	1795	2075	2355	2830	3305	3780	4210	4690	5155											5600	
40	2020	2335	2650	3150	3720	4240	4750	5280	5800											6300	
25	1700	2390	3075	3660	4300	4910	5500	6120	6730											5310	
10	2665	3085	3500	4160	4915	5600	6265	6995	7660											8325	
26.5" 800/45 R 26.5	174 D/184 A8	AG 24.00	AG 28.00	788	1393	618	4277	675	STD											bar	0.8
										km/h	70	1955	2260	2565	3100	3600	4120	4600	5125	5615	6100
										65	2145	2480	2815	3400	3955	4540	5050	5630	6165	6700	
										50	2600	3005	3410	4120	4785	5500	6100	6815	7465	8110	
										40	2880	3330	3780	4570	5310	6080	6785	7560	8280	9000	
										25	3390	3920	4450	5400	6250	7160	7985	8900	9745	10590	
										10	3860	4465	5070	6140	7120	8160	9085	10135	11100	12060	

STD: Standard



MAIN APPLICATION:
FLOTATION



FL 630 SUPER

FL 630 SUPER is suitable for trailers, tankers and spreaders. Thanks to its constructive features and tread design, FL630 SUPER is the ideal tire for multipurpose use on any kind of land or on the road, where qualities like uniform drive and resistance are further highlighted.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)																																																																																																																				
		Rec.	Alt.																																																																																																																											
22.5" 560/60 R 22.5	161 D	AG 16.00	17.00; 20.00	543	1244	549	3785	600	STD	<table border="1"> <thead> <tr> <th>bar</th> <th>0.8</th> <th>1.0</th> <th>1.2</th> <th>1.6</th> <th>2.0</th> <th>2.4</th> <th>2.8</th> <th>3.2</th> <th>3.6</th> <th>4.0</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>km/h</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>70</td> <td>1360</td><td>1575</td><td>1785</td><td>2125</td><td>2510</td><td>2870</td><td>3190</td><td>3570</td><td>3910</td><td>4250</td><td></td><td></td> </tr> <tr> <td>65</td> <td>1480</td><td>1715</td><td>1945</td><td>2315</td><td>2730</td><td>3125</td><td>3470</td><td>3885</td><td>4255</td><td>4625</td><td></td><td></td> </tr> <tr> <td>50</td> <td>1795</td><td>2075</td><td>2355</td><td>2800</td><td>3305</td><td>3780</td><td>4200</td><td>4705</td><td>5155</td><td>5600</td><td></td><td></td> </tr> <tr> <td>40</td> <td>2015</td><td>2330</td><td>2645</td><td>3145</td><td>3715</td><td>4250</td><td>4720</td><td>5285</td><td>5790</td><td>6290</td><td></td><td></td> </tr> <tr> <td>25</td> <td>2340</td><td>2710</td><td>3075</td><td>3655</td><td>4315</td><td>4935</td><td>5485</td><td>6145</td><td>6730</td><td>7310</td><td></td><td></td> </tr> <tr> <td>10</td> <td>2665</td><td>3085</td><td>3500</td><td>4165</td><td>5915</td><td>5620</td><td>6245</td><td>6995</td><td>7660</td><td>8325</td><td></td><td></td> </tr> </tbody> </table>											bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0			km/h													70	1360	1575	1785	2125	2510	2870	3190	3570	3910	4250			65	1480	1715	1945	2315	2730	3125	3470	3885	4255	4625			50	1795	2075	2355	2800	3305	3780	4200	4705	5155	5600			40	2015	2330	2645	3145	3715	4250	4720	5285	5790	6290			25	2340	2710	3075	3655	4315	4935	5485	6145	6730	7310			10	2665	3085	3500	4165	5915	5620	6245	6995	7660	8325				
										bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0																																																																																																										
										km/h																																																																																																																				
										70	1360	1575	1785	2125	2510	2870	3190	3570	3910	4250																																																																																																										
										65	1480	1715	1945	2315	2730	3125	3470	3885	4255	4625																																																																																																										
										50	1795	2075	2355	2800	3305	3780	4200	4705	5155	5600																																																																																																										
										40	2015	2330	2645	3145	3715	4250	4720	5285	5790	6290																																																																																																										
										25	2340	2710	3075	3655	4315	4935	5485	6145	6730	7310																																																																																																										
										10	2665	3085	3500	4165	5915	5620	6245	6995	7660	8325																																																																																																										
										580/65 R 22.5	166 D	AG 18.00	AG 16.00; AG 17.00; AG 20.00	577	1326	594	4058	625	STD	<table border="1"> <thead> <tr> <th>bar</th> <th>0.8</th> <th>1.0</th> <th>1.2</th> <th>1.6</th> <th>2.0</th> <th>2.4</th> <th>2.8</th> <th>3.2</th> <th>3.6</th> <th>4.0</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>km/h</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>70</td> <td>1560</td><td>1805</td><td>2050</td><td>2440</td><td>2880</td><td>3295</td><td>3660</td><td>4095</td><td>4485</td><td>4875</td><td></td><td></td> </tr> <tr> <td>65</td> <td>1700</td><td>1965</td><td>2230</td><td>2650</td><td>3130</td><td>3580</td><td>3975</td><td>4455</td><td>4880</td><td>5300</td><td></td><td></td> </tr> <tr> <td>50</td> <td>2055</td><td>2375</td><td>2695</td><td>3210</td><td>3785</td><td>4335</td><td>4815</td><td>5390</td><td>5905</td><td>6415</td><td></td><td></td> </tr> <tr> <td>40</td> <td>2310</td><td>2670</td><td>3030</td><td>3605</td><td>4255</td><td>4870</td><td>5410</td><td>6060</td><td>6635</td><td>7210</td><td></td><td></td> </tr> <tr> <td>25</td> <td>2680</td><td>3100</td><td>3520</td><td>4190</td><td>4945</td><td>5655</td><td>6285</td><td>7035</td><td>7705</td><td>8375</td><td></td><td></td> </tr> <tr> <td>10</td> <td>3055</td><td>3535</td><td>4010</td><td>4770</td><td>5630</td><td>6440</td><td>7155</td><td>8015</td><td>8780</td><td>9540</td><td></td><td></td> </tr> </tbody> </table>											bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0			km/h													70	1560	1805	2050	2440	2880	3295	3660	4095	4485	4875			65	1700	1965	2230	2650	3130	3580	3975	4455	4880	5300			50	2055	2375	2695	3210	3785	4335	4815	5390	5905	6415			40	2310	2670	3030	3605	4255	4870	5410	6060	6635	7210			25	2680	3100	3520	4190	4945	5655	6285	7035	7705	8375			10	3055	3535	4010	4770
bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6											4.0																																																																																																										
km/h																																																																																																																														
70	1560	1805	2050	2440	2880	3295	3660	4095	4485											4875																																																																																																										
65	1700	1965	2230	2650	3130	3580	3975	4455	4880											5300																																																																																																										
50	2055	2375	2695	3210	3785	4335	4815	5390	5905											6415																																																																																																										
40	2310	2670	3030	3605	4255	4870	5410	6060	6635											7210																																																																																																										
25	2680	3100	3520	4190	4945	5655	6285	7035	7705											8375																																																																																																										
10	3055	3535	4010	4770	5630	6440	7155	8015	8780											9540																																																																																																										
26.5" 600/55 R 26.5	165 D	AG 20.00	-	611	1333	606	4078	625	STD											<table border="1"> <thead> <tr> <th>bar</th> <th>0.8</th> <th>1.0</th> <th>1.2</th> <th>1.6</th> <th>2.0</th> <th>2.4</th> <th>2.8</th> <th>3.2</th> <th>3.6</th> <th>4.0</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>km/h</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>70</td> <td>1505</td><td>1740</td><td>1970</td><td>2395</td><td>2770</td><td>3190</td><td>3615</td><td>3895</td><td>4315</td><td>4690</td><td></td><td></td> </tr> <tr> <td>65</td> <td>1650</td><td>1910</td><td>2165</td><td>2630</td><td>3040</td><td>3505</td><td>3970</td><td>4275</td><td>4740</td><td>5150</td><td></td><td></td> </tr> <tr> <td>50</td> <td>2000</td><td>2310</td><td>2620</td><td>3180</td><td>3680</td><td>4240</td><td>4805</td><td>5180</td><td>5740</td><td>6235</td><td></td><td></td> </tr> <tr> <td>40</td> <td>2245</td><td>2595</td><td>2945</td><td>3575</td><td>4135</td><td>4765</td><td>5395</td><td>5815</td><td>6445</td><td>7005</td><td></td><td></td> </tr> <tr> <td>25</td> <td>2605</td><td>3015</td><td>3420</td><td>4155</td><td>4805</td><td>5540</td><td>6270</td><td>6760</td><td>7490</td><td>8140</td><td></td><td></td> </tr> <tr> <td>10</td> <td>2970</td><td>3435</td><td>3895</td><td>4730</td><td>5470</td><td>6305</td><td>7140</td><td>7695</td><td>8530</td><td>9270</td><td></td><td></td> </tr> </tbody> </table>											bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0			km/h													70	1505	1740	1970	2395	2770	3190	3615	3895	4315	4690			65	1650	1910	2165	2630	3040	3505	3970	4275	4740	5150			50	2000	2310	2620	3180	3680	4240	4805	5180	5740	6235			40	2245	2595	2945	3575	4135	4765	5395	5815	6445	7005			25	2605	3015	3420	4155	4805	5540	6270	6760	7490	8140			10	2970	3435	3895	4730
										bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0																																																																																																										
										km/h																																																																																																																				
										70	1505	1740	1970	2395	2770	3190	3615	3895	4315	4690																																																																																																										
										65	1650	1910	2165	2630	3040	3505	3970	4275	4740	5150																																																																																																										
										50	2000	2310	2620	3180	3680	4240	4805	5180	5740	6235																																																																																																										
										40	2245	2595	2945	3575	4135	4765	5395	5815	6445	7005																																																																																																										
										25	2605	3015	3420	4155	4805	5540	6270	6760	7490	8140																																																																																																										
										10	2970	3435	3895	4730	5470	6305	7140	7695	8530	9270																																																																																																										
										600/55 R 26.5	177 D	AG 20.00	-	611	1333	604	4104	625	HD	<table border="1"> <thead> <tr> <th>bar</th> <th>0.8</th> <th>1.0</th> <th>1.2</th> <th>1.6</th> <th>2.0</th> <th>2.4</th> <th>2.8</th> <th>3.2</th> <th>3.6</th> <th>4.0</th> <th>5.0</th> <th>6.0</th> </tr> </thead> <tbody> <tr> <td>km/h</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>65</td> <td>1825</td><td>2265</td><td>2705</td><td>3285</td><td>3800</td><td>4380</td><td>4965</td><td>5330</td><td>5915</td><td>6500</td><td>6865</td><td>7300</td> </tr> <tr> <td>50</td> <td>2210</td><td>2740</td><td>3270</td><td>3980</td><td>4595</td><td>5305</td><td>6010</td><td>6450</td><td>7160</td><td>7865</td><td>8305</td><td>8835</td> </tr> <tr> <td>40</td> <td>2485</td><td>3080</td><td>3675</td><td>4470</td><td>5165</td><td>5960</td><td>6755</td><td>7250</td><td>8045</td><td>8840</td><td>9335</td><td>9930</td> </tr> <tr> <td>30</td> <td>2760</td><td>3420</td><td>4080</td><td>4965</td><td>5735</td><td>6615</td><td>7500</td><td>8050</td><td>8935</td><td>9815</td><td>10365</td><td>11025</td> </tr> <tr> <td>25</td> <td>2885</td><td>3580</td><td>4270</td><td>5195</td><td>6000</td><td>6925</td><td>7845</td><td>8425</td><td>9345</td><td>10270</td><td>10845</td><td>11535</td> </tr> <tr> <td>10</td> <td>3285</td><td>4075</td><td>4865</td><td>5915</td><td>6835</td><td>7885</td><td>8940</td><td>9595</td><td>10645</td><td>11695</td><td>12355</td><td>13140</td> </tr> </tbody> </table>													bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	5.0	6.0	km/h													65	1825	2265	2705	3285	3800	4380	4965	5330	5915	6500	6865	7300	50	2210	2740	3270	3980	4595	5305	6010	6450	7160	7865	8305	8835	40	2485	3080	3675	4470	5165	5960	6755	7250	8045	8840	9335	9930	30	2760	3420	4080	4965	5735	6615	7500	8050	8935	9815	10365	11025	25	2885	3580	4270	5195	6000	6925	7845	8425	9345	10270	10845	11535	10	3285	4075
bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6											4.0	5.0	6.0																																																																																																								
km/h																																																																																																																														
65	1825	2265	2705	3285	3800	4380	4965	5330	5915											6500	6865	7300																																																																																																								
50	2210	2740	3270	3980	4595	5305	6010	6450	7160											7865	8305	8835																																																																																																								
40	2485	3080	3675	4470	5165	5960	6755	7250	8045											8840	9335	9930																																																																																																								
30	2760	3420	4080	4965	5735	6615	7500	8050	8935											9815	10365	11025																																																																																																								
25	2885	3580	4270	5195	6000	6925	7845	8425	9345											10270	10845	11535																																																																																																								
10	3285	4075	4865	5915	6835	7885	8940	9595	10645											11695	12355	13140																																																																																																								
650/55 R 26.5	169 D	AG 20.00	-	645	1389	627	4258	650	STD											<table border="1"> <thead> <tr> <th>bar</th> <th>0.8</th> <th>1.0</th> <th>1.2</th> <th>1.6</th> <th>2.0</th> <th>2.4</th> <th>2.8</th> <th>3.2</th> <th>3.6</th> <th>4.0</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>km/h</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>70</td> <td>1690</td><td>1955</td><td>2220</td><td>2695</td><td>3120</td><td>3595</td><td>4070</td><td>4385</td><td>4860</td><td>5280</td><td></td><td></td> </tr> <tr> <td>65</td> <td>1860</td><td>2150</td><td>2440</td><td>2960</td><td>3425</td><td>3945</td><td>4470</td><td>4815</td><td>5340</td><td>5800</td><td></td><td></td> </tr> <tr> <td>50</td> <td>2250</td><td>2600</td><td>2950</td><td>3585</td><td>4145</td><td>4775</td><td>5410</td><td>5830</td><td>6460</td><td>7020</td><td></td><td></td> </tr> <tr> <td>40</td> <td>2525</td><td>2920</td><td>3315</td><td>4025</td><td>4660</td><td>5370</td><td>6080</td><td>6550</td><td>7260</td><td>7890</td><td></td><td></td> </tr> <tr> <td>25</td> <td>2935</td><td>3395</td><td>3850</td><td>4675</td><td>5410</td><td>6235</td><td>7060</td><td>7610</td><td>8435</td><td>9165</td><td></td><td></td> </tr> <tr> <td>10</td> <td>3345</td><td>3865</td><td>4385</td><td>5385</td><td>6160</td><td>7100</td><td>8040</td><td>8670</td><td>9605</td><td>10440</td><td></td><td></td> </tr> </tbody> </table>											bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0			km/h													70	1690	1955	2220	2695	3120	3595	4070	4385	4860	5280			65	1860	2150	2440	2960	3425	3945	4470	4815	5340	5800			50	2250	2600	2950	3585	4145	4775	5410	5830	6460	7020			40	2525	2920	3315	4025	4660	5370	6080	6550	7260	7890			25	2935	3395	3850	4675	5410	6235	7060	7610	8435	9165			10	3345	3865	4385	5385
										bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0																																																																																																										
										km/h																																																																																																																				
										70	1690	1955	2220	2695	3120	3595	4070	4385	4860	5280																																																																																																										
										65	1860	2150	2440	2960	3425	3945	4470	4815	5340	5800																																																																																																										
										50	2250	2600	2950	3585	4145	4775	5410	5830	6460	7020																																																																																																										
										40	2525	2920	3315	4025	4660	5370	6080	6550	7260	7890																																																																																																										
										25	2935	3395	3850	4675	5410	6235	7060	7610	8435	9165																																																																																																										
										10	3345	3865	4385	5385	6160	7100	8040	8670	9605	10440																																																																																																										
										650/55 R 26.5	178 D	AG 20.00	-	645	1389	628	4292	650	HD	<table border="1"> <thead> <tr> <th>bar</th> <th>0.8</th> <th>1.0</th> <th>1.2</th> <th>1.6</th> <th>2.0</th> <th>2.4</th> <th>2.8</th> <th>3.2</th> <th>3.6</th> <th>4.0</th> <th>5.0</th> <th>6.0</th> </tr> </thead> <tbody> <tr> <td>km/h</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>65</td> <td>1875</td><td>2325</td><td>2775</td><td>3375</td><td>3900</td><td>4500</td><td>5100</td><td>5475</td><td>6075</td><td>6675</td><td>7050</td><td>7500</td> </tr> <tr> <td>50</td> <td>2270</td><td>2815</td><td>3360</td><td>4085</td><td>4720</td><td>5445</td><td>6175</td><td>6625</td><td>7355</td><td>8080</td><td>8535</td><td>9075</td> </tr> <tr> <td>40</td> <td>2550</td><td>3165</td><td>3775</td><td>4590</td><td>5305</td><td>6120</td><td>6940</td><td>7450</td><td>8265</td><td>9080</td><td>9590</td><td>10200</td> </tr> <tr> <td>30</td> <td>2835</td><td>3515</td><td>4195</td><td>5100</td><td>5890</td><td>6795</td><td>7705</td><td>8270</td><td>9175</td><td>10080</td><td>10650</td><td>11325</td> </tr> <tr> <td>25</td> <td>2965</td><td>3675</td><td>4385</td><td>5335</td><td>6165</td><td>7110</td><td>8060</td><td>8655</td><td>9600</td><td>10550</td><td>11140</td><td>11850</td> </tr> <tr> <td>10</td> <td>3375</td><td>4185</td><td>4995</td><td>6075</td><td>7020</td><td>8100</td><td>9180</td><td>9855</td><td>10935</td><td>12015</td><td>12690</td><td>13500</td> </tr> </tbody> </table>													bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	5.0	6.0	km/h													65	1875	2325	2775	3375	3900	4500	5100	5475	6075	6675	7050	7500	50	2270	2815	3360	4085	4720	5445	6175	6625	7355	8080	8535	9075	40	2550	3165	3775	4590	5305	6120	6940	7450	8265	9080	9590	10200	30	2835	3515	4195	5100	5890	6795	7705	8270	9175	10080	10650	11325	25	2965	3675	4385	5335	6165	7110	8060	8655	9600	10550	11140	11850	10	3375	4185
bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6											4.0	5.0	6.0																																																																																																								
km/h																																																																																																																														
65	1875	2325	2775	3375	3900	4500	5100	5475	6075											6675	7050	7500																																																																																																								
50	2270	2815	3360	4085	4720	5445	6175	6625	7355											8080	8535	9075																																																																																																								
40	2550	3165	3775	4590	5305	6120	6940	7450	8265											9080	9590	10200																																																																																																								
30	2835	3515	4195	5100	5890	6795	7705	8270	9175											10080	10650	11325																																																																																																								
25	2965	3675	4385	5335	6165	7110	8060	8655	9600											10550	11140	11850																																																																																																								
10	3375	4185	4995	6075	7020	8100	9180	9855	10935											12015	12690	13500																																																																																																								

STD: Standard HD: Heavy Duty

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
FLOTATION



FL 630 SUPER

FL 630 SUPER is suitable for trailers, tankers and spreaders. Thanks to its constructive features and tread design, FL630 SUPER is the ideal tire for multipurpose use on any kind of land or on the road, where qualities like uniform drive and resistance are further highlighted.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)																									
		Rec.	Alt.							↓																									
											bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0														
26.5" 650/65 R 26.5	174 D	AG 20.00	-	645	1519	684	4653	725	STD	km/h	70	65	50	40	25	10	1955	2260	2565	3115	3600	4150	4700	5065	5615	6100									
										70	2145	2480	2815	3420	3955	4560	5160	5565	6165	6700															
										50	2600	3005	3410	4140	4785	5515	6245	6735	7465	8110															
										40	2920	3375	3830	4650	5380	6200	7020	7570	8390	9115															
										25	3390	3920	4450	5405	6250	7205	8155	8790	9745	10590															
										10	3860	4465	5070	6155	7120	8205	9290	10010	11100	12060															
710/50 R 26.5	170 D	AG 24.00	AG 20.00	727	1383	626	4237	650	STD	bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0															
										km/h	70	65	50	40	25	10	1745	2020	2290	2780	3220	3710	4200	4525	5015	5450									
										70	1920	2220	2520	3060	3540	4080	4620	4980	5520	6000															
										50	2325	2690	3050	3705	4285	4940	5595	6030	6680	7260															
										40	2615	3025	3430	4165	4815	5550	6285	6775	7510	8160															
										25	3035	3510	3985	4835	5595	6450	7300	7870	8725	9480															
										10	3460	4000	4540	5510	6375	7345	8320	8965	9940	10800															
750/45 R 26.5	170 D	AG 24.00	-	754	1349	606	4147	650	STD	bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0															
										km/h	70	65	50	40	25	10	1750	1995	2240	2785	3170	3660	4150	4535	4970	5460									
										70	1920	2190	2460	3060	3480	4020	4560	4980	5460	6000															
										50	2325	2655	2980	3705	4215	4865	5520	6030	6610	7260															
										40	2615	2985	3350	4165	4735	5470	6205	6775	7430	8160															
										25	3035	3465	3890	4835	5500	6355	7205	7870	8630	9480															
										10	3460	3945	4430	5510	6265	7240	8210	8965	9830	10800															
750/60 R 26.5	180 D	AG 24.00	-	754	1574	694	4800	725	STD	bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0															
										km/h	70	65	50	40	25	10	2340	2705	3070	3725	4310	4965	5625	6060	6720	7300									
										70	2560	2960	3360	4080	4720	5440	6160	6640	7360	8000															
										50	3100	3585	4070	4940	5715	6585	7455	8035	8910	9680															
										40	3485	4030	4570	5550	6420	7400	8380	9035	10010	10880															
										25	4045	4680	5310	6450	7460	8600	9735	10495	11630	12640															
										10	4610	5330	6050	7345	8500	9795	11090	11955	13250	14400															

STD: Standard



MAIN APPLICATION:
FLOTATION



FL 630 SUPER

FL 630 SUPER is suitable for trailers, tankers and spreaders. Thanks to its constructive features and tread design, FL630 SUPER is the ideal tire for multipurpose use on any kind of land or on the road, where qualities like uniform drive and resistance are further highlighted.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)										
		Rec.	Alt.							↓										
30.5" 650/65 R 30.5	176 D	AG 20.00	-	645	1621	734	4976	775	STD	bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
										km/h	2070	2395	2720	3300	3815	4400	4980	5370	5950	6465
										70	2275	2630	2985	3625	4190	4830	5470	5895	6535	7100
										65	2755	3185	3610	4385	5075	5845	6620	7135	7910	8595
										50	3095	3580	4060	4930	5700	6570	7440	8020	8890	9660
										40	3595	4155	4715	5725	6620	7630	8640	9315	10325	11220
										25	4090	4730	5370	6520	7545	8695	9845	10610	11760	12780
750/60 R 30.5	181 D	AG 24.00	-	754	1675	746	5115	800	STD	bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
										km/h	2405	2780	3155	3835	4435	5110	5785	6235	6910	7510
										70	2640	3055	3465	4210	4870	5610	6355	6850	7590	8250
										65	3200	3700	4195	5095	5895	6790	7690	8290	9190	9985
										50	3595	4155	4715	5725	6620	7630	8640	9315	10325	11220
										40	4175	4825	5475	6650	7695	8865	10040	10820	11995	13035
										25	4755	5500	6240	7575	8765	10100	11435	12330	13665	14850

STD: Standard



MAIN APPLICATION:
FLOTATION



FL 630 ULTRA

FL 630 ULTRA is a flotation tire suitable for field and road applications with trailers, tankers and spreaders. Its resistant structure provides excellent traction and perfect grip even in bends and when maneuvering. The particular tread design ensures excellent grip on any kind of terrain in addition to enhanced self-cleaning features.



DRIVE WHEEL APPLICATION

FIELD AND ROAD

FIELD PROTECTION

FREE ROLLING APPLICATION

HIGH FLOTATION CAPABILITY

REINFORCED BEAD

TRACTION

SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)										
		Rec.	Alt.							↓										
				bar																
				km/h																
22.5" 500/60 R 22.5	155 D/166 A8	AG 16.00	15.00; 16.00; 17.00	503	1172	521	3592	550	STD	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	
										70	1130	1310	1485	1780	2085	2385	2670	2970	3250	3530
										65	1240	1435	1630	1950	2290	2610	2930	3255	3565	3875
										50	1505	1740	1970	2345	2770	3160	3540	3940	4315	4690
										40	1700	1965	2230	2680	3110	3560	3990	4440	4880	5300
										25	1960	2270	2575	3080	3615	4110	4630	5130	5635	6125
										10	2235	2585	2930	3500	4100	4700	5250	5850	6420	6975
560/45 R 22.5	152 D/163 A8	AG 16.00	-	543	1076	490	3290	525	STD	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	
										70	1040	1185	1330	1650	1880	2170	2460	2690	2945	3235
										65	1140	1300	1460	1815	2060	2380	2700	2950	3235	3550
										50	1380	1575	1765	2195	2495	2885	3270	3570	3915	4300
										40	1560	1780	2000	2490	2830	3270	3705	4050	4440	4875
										30	1720	1960	2200	2740	3115	3595	4080	4455	4885	5365
										25	1800	2055	2305	2865	3255	3760	4265	4660	5110	5610
10	2045	2335	2620	3260	3710	4285	4860	5305	5815	6390										
560/60 R 22.5	161 D/172 A8	AG 16.00	16.00; 17.00; AG 20.00	543	1244	535	3760	600	STD	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	
										70	1350	1540	1730	2150	2445	2825	3200	3495	3835	4210
										65	1480	1690	1900	2360	2685	3100	3515	3840	4210	4625
										50	1795	2050	2300	2860	3250	3755	4260	4650	5100	5600
										40	2020	2305	2585	3215	3655	4225	4790	5230	5735	6300
										30	2240	2555	2865	3565	4055	4680	5310	5800	6360	6985
										25	2340	2670	3000	3730	4240	4900	5560	6070	6655	7310
10	2665	3040	3415	4250	4830	5580	6330	6910	7580	8325										
600/50 R 22.5	159 D/170 A8	AG 20.00	-	611	1172	509	3528	550	STD	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	
										70	1280	1480	1675	2020	2355	2680	3020	3330	3670	3985
										65	1400	1620	1840	2220	2585	2950	3310	3660	4025	4375
										50	1695	1960	2225	2700	3125	3575	4000	4420	4875	5295
										40	1920	2220	2520	3040	3540	4050	4555	5020	5520	6000
										25	2215	2560	2905	3510	4080	4675	5210	5800	6365	6915
										10	2520	2915	3310	4000	4650	5325	5940	6600	7245	7875
710/40 R 22.5	161 D/172 A8	AG 24.00	-	727	1140	514	3490	550	STD	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	
										70	1350	1540	1730	2150	2445	2825	3200	3495	3835	4210
										65	1480	1690	1900	2360	2685	3100	3515	3840	4210	4625
										50	1795	2050	2300	2860	3250	3755	4260	4650	5100	5600
										40	2020	2305	2585	3215	3655	4225	4790	5230	5735	6300
										30	2240	2555	2865	3565	4055	4680	5310	5800	6360	6985
										25	2340	2670	3000	3730	4240	4900	5560	6070	6655	7310
10	2665	3040	3415	4250	4830	5580	6330	6910	7580	8325										

STD: Standard



MAIN APPLICATION:
FLOTATION



FL 630 ULTRA

FL 630 ULTRA is a flotation tire suitable for field and road applications with trailers, tankers and spreaders. Its resistant structure provides excellent traction and perfect grip even in bends and when maneuvering. The particular tread design ensures excellent grip on any kind of terrain in addition to enhanced self-cleaning features.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)											
		Rec.	Alt.							↓											
26.5" 600/55 R 26.5	165 D/176 A8	AG 20.00	-	611	1333	579	4034	625	STD	bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	
										km/h	65	1650	1910	2165	2630	3040	3505	3970	4275	4740	5150
										50	2000	2310	2620	3180	3680	4240	4805	5180	5740	6235	
										40	2275	2630	2985	3625	4190	4830	5470	5895	6535	7100	
										25	2605	3015	3420	4155	4805	5540	6270	6760	7490	8140	
										10	2970	3435	3895	4730	5470	6305	7140	7695	8530	9270	
										bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	
650/55 R 26.5	169 D/180 A8	AG 20.00	-	645	1389	600	4207	650	STD	bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	
										km/h	65	1860	2150	2440	2960	3425	3945	4470	4815	5340	5800
										50	2250	2600	2950	3585	4145	4775	5410	5830	6460	7020	
										40	2560	2960	3360	4080	4720	5440	6160	6640	7360	8000	
										25	2935	3395	3850	4675	5410	6235	7060	7610	8435	9165	
										10	3345	3865	4385	5325	6160	7100	8040	8670	9605	10440	
										bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	
710/50 R 26.5	170 D/181 A8	AG 24.00	AG 20.00	727	1383	599	4208	650	STD	bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	
										km/h	70	1750	1995	2240	2785	3170	3660	4150	4535	4970	5460
										65	1920	2190	2460	3060	3480	4020	4560	4980	5460	6000	
										50	2325	2655	2980	2980	3705	4215	4865	5520	6030	7260	
										40	2640	3015	3385	4210	4785	5530	6270	6850	7510	8250	
										25	3035	3465	3890	4835	5500	6355	7205	7870	8630	9480	
										10	3460	3945	4430	5510	6265	7240	8210	8965	9830	10800	
bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0											
800/45 R 26.5	174 D/184 A8	AG 24.00	AG 28.00	788	1393	618	4238	675	STD	bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	
										km/h	70	1955	2230	2505	3115	3540	4090	4640	5065	5555	6100
										65	2145	2450	2750	3420	3890	4490	5095	5565	6100	6700	
										50	2600	2965	3330	4140	4705	5435	6165	6735	7385	8110	
										40	2880	3285	3690	4590	5220	6030	6840	7470	8190	9000	
										30	3240	3695	4150	5165	5870	6785	7695	8400	9210	10120	
										25	3390	3870	4345	5405	6145	7100	8050	8790	9640	10590	
10	3860	4405	4945	6155	6995	8085	9170	10010	10975	12060											
bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0											

STD: Standard



**MAIN APPLICATION:
FLOTATION**



FL 635

FL 635 is a radial flotation tire suitable for both road and field usage. The special block pattern has been designed for grassland/hay baler applications. FL 635 ensures a great pressure distribution on the ground across the footprint and drastically reduces the soil compaction to preserve the value of the crops.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)										
		Rec.	Alt.																	
22.5" 620/40 R 22.5	154 D	AG 20.00	-	625	1068	470	3225	500	STD	bar										
										km/h										
										0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	
										70	1095	1250	1405	1745	1985	2290	2600	2835	3110	3415
										65	1200	1370	1540	1915	2175	2515	2850	3115	3415	3750
										50	1455	1660	1865	2320	2635	3045	3455	3770	4135	4540
										40	1635	1865	2095	2605	2960	3420	3880	4235	4645	5100
										25	1900	2165	2430	3025	3440	3970	4505	4920	5395	5925
										10	2160	2465	2770	3445	3915	4525	5130	5605	6145	6750
										650/55 R 22.5	167 D	AG 20.00	-	645	1287	568	3901	600	STD	bar
km/h																				
0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0											
70	1590	1815	2035	2530	2880	3325	3770	4120	4515											4960
65	1745	1990	2235	2780	3165	3655	4145	4525	4960											5450
50	2115	2410	2705	3365	3830	4420	5015	5475	6005											6595
40	2375	2710	3045	3785	4305	4970	5640	6155	6750											7415
25	2760	3150	3535	4395	5000	5775	6550	7155	7840											8615
10	3140	3585	4025	5005	5690	6575	7460	8145	8930											9810
710/40 R 22.5	161 D	AG 24.00	-	727	1140	510	3467	550	STD											bar
										km/h										
										0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	
										70	1350	1540	1730	2150	2445	2825	3200	3495	3835	4210
										65	1480	1690	1900	2360	2685	3100	3515	3840	4210	4625
										50	1795	2050	2300	2860	3250	3755	4260	4650	5100	5600
										40	2015	2300	2580	3210	3650	4215	4785	5225	5725	6290
										30	2240	2555	2865	3565	4055	4680	5310	5800	6360	6985
										25	2340	2670	3000	3730	4240	4900	5560	6070	6655	7310
										10	2665	3040	3415	4250	4830	5580	6330	6910	7580	8325
750/45 R 22.5	168 D	AG 24.00	-	754	1247	555	3810	600	STD	bar										
										km/h										
										0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	
										70	1635	1865	2095	2605	2960	3420	3880	4235	4645	5100
										65	1795	2050	2300	2860	3250	3755	4260	4650	5100	5600
										50	2170	2475	2780	3460	3935	4545	5155	5630	6170	6780
										40	2440	2785	3125	3890	4420	5110	5795	6325	6935	7620
										30	2710	3090	3470	4315	4910	5670	6430	7025	7700	8460
										25	2835	3235	3630	4515	5135	5930	6730	7350	8055	8850
										10	3230	3685	4135	5145	5850	6755	7665	8370	9175	10080

STD: Standard



**MAIN APPLICATION:
FLOTATION**



FL 637

FL 637 is a radial flotation tire suitable for spreaders, trailers and tankers. The steel-belted structure provides enhanced durability and higher load capacity. In addition to excellent flotation features, this tire shows low rolling resistance and outstanding self-cleaning properties. The directional tread design ensures excellent traction.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)										
		Rec.	Alt.							↓										
											bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
520/50 R 17	147 D/144 E	16.00	-	516	952	414	2880	450	STD	70	900	1150	1430	1625	1880	2130	2325	2550	2800	
										65	985	1265	1570	1785	2065	2340	2555	2800	3075	
										50	1195	1530	1900	2165	2500	2835	3095	3390	3725	
										40	1340	1720	2135	2430	2805	3185	3475	3810	4185	
										30	1490	1905	2370	2695	3115	3535	3860	4230	4645	
										25	1560	1995	2480	2820	3260	3695	4035	4425	4860	
										10	1775	2270	2825	3215	3710	4210	4595	5040	5535	

STD: Standard



**MAIN APPLICATION:
FLOTATION**



FL 639

FL 639 is a field-oriented flotation radial tire also suitable for spreading applications. Its wide footprint area ensures low soil compaction resulting in increased crop productivity. The reinforced bead and the sidewall protection contribute to an extended tire life-cycle.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)										
		Rec.	Alt.							↓										
22.5" 560/45 R 22.5	152 D/163 A8	AG 16.00	-	543	1076	484	3303	525	STD	bar										
										km/h										
										0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	
										70	1040	1200	1360	1620	1910	2170	2430	2720	2980	3235
										65	1140	1320	1495	1790	2095	2380	2700	2960	3270	3550
										50	1380	1595	1810	2150	2540	2900	3240	3615	3960	4300
										40	1560	1805	2050	2450	2880	3270	3675	4090	4485	4875
										25	1800	2080	2360	2820	3310	3775	4230	4700	5165	5610
10	2045	2365	2685	3200	3775	4300	4820	5350	5880	6390										
600/50 R 22.5	159 D/170 A8	AG 20.00	-	611	1172	521	3592	550	STD	bar										
										km/h										
										0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	
										70	1280	1480	1675	2020	2355	2680	3020	3330	3670	3985
										65	1400	1620	1840	2220	2585	2950	3310	3660	4025	4375
										50	1695	1960	2225	2700	3125	3575	4000	4420	4875	5295
										40	1920	2220	2520	3040	3540	4050	4555	5020	5520	6000
										25	2215	2560	2905	3510	4080	4675	5210	5800	6365	6915
10	2520	2915	3310	4000	4650	5325	5940	6600	7245	7875										
710/40 R 22.5	161 D/172 A8	AG 24.00	-	727	1140	503	3492	550	STD	bar										
										km/h										
										0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	
										70	1350	1560	1770	2150	2485	2865	3245	3495	3875	4210
										65	1480	1715	1945	2360	2730	3145	3565	3840	4255	4625
										50	1795	2075	2355	2860	3305	3810	4315	4650	5155	5600
										40	2015	2330	2645	3210	3715	4280	4845	5225	5790	6290
										25	2340	2710	3075	3730	4315	4975	5630	6070	6730	7310
10	2665	3085	3500	4250	4915	5665	6415	6910	7660	8325										

STD: Standard



MAIN APPLICATION:
FLOTATION



FLOTATION 351 (HF-3)

FLOTATION 351 is a bias flotation tire which best suits transport applications with trailers. Extra deep lugs provide outstanding traction and a longer tire life. FLOTATION 351 is the ideal tire on wet and moist surfaces and helps to improve the productivity of today's farming businesses.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 50 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
20" 42 X 25.00 - 20	20.50 HF	20.50 VF	605	1110	508	3302	STD	12	TL	135 B	3.10	2180
42 X 25.00 - 20	20.50 HF	20.50 VF	605	1110	508	3302	STD	16	TL	139 B	3.70	2430
48 X 25.00 - 20	20.50 HF	20.50 VF	630	1270	559	3785	STD	10	TL	144 B	2.40	2800
48 X 31.00 - 20	26.00 HF	26.00 VF	775	1283	559	3886	STD	12	TL	148 B	2.70	3150
25" 66 X 43.00 - 25	36.0 TH	-	1020	1750	782	5213	STD	6	TL	-	1.0	3350
66 X 43.00 - 25	36.0 TH	-	1020	1750	782	5213	STD	10	TL	160 B	1.70	4500
66 X 43.00 - 25	36.0 TH	-	1020	1750	782	5213	STD	16	TL	170 B	2.80	6000

STD: Standard



FL 353

FL 353 features excellent traction and high stability as well as enhanced self-cleaning properties. Its reinforced bead contributes to an extended tire life-cycle. FL 353 provides high flotation capability to reduce soil compaction.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 50 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
25" 66 X 43.00 - 25	36.0TH	-	1055	1680	-	-	STD	6	TL	-	2.10	5000

STD: Standard

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



**MAIN APPLICATION:
FLOTATION**



FL 354

FL 354 is the second generation Monster Truck racing tire. It features a flat tread design providing a wide contact area, which ensures outstanding stability. The superior tread and sidewall compound enable excellent wear and tear resistance.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 50 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
25" 66 X 43.00 - 25	36.0TH	-	1010	1690	-	-	STD	6	TL	-	2.10	5000

STD: Standard



MAIN APPLICATION:
FLOTATION



FLOTATION 558

FLOTATION 558 is a cross-ply flotation tire suitable for hay harvesters/balers, implement machinery and trailers both on and off the road. It is particularly recommended on muddy grounds and whenever traction and high flotation are essential for good soil tillage.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)															
	Rec.	Alt.										↓															
22.5" 400/55 - 22.5	AG 11.75	12.25; 13.00; AG 13.00	405	1020	445	3084	STD	14	TL	150 A8/146 B	138 A8/134 B	bar	3.00	3.20	3.50												
												km/h															
												10 FR	4285	4450	4690												
												20 FR	3855	4005	4220												
												30 FR	3425	3560	3750												
												40 FR	3060	3180	3350												
												50 FR	2755	2860	3000												
												10 DW	3015	3135	3305												
												20 DW	2715	2820	2975												
												30 DW	2415	2510	2645												
												40 DW	2155	2240	2360												
												50 DW	1940	2015	2120												
												400/55 - 22.5	AG 11.75	12.25; 13.00; AG 13.00	405	1020	445	3084	STD	16	TL	152 A8/148 B	140 A8/136 B	bar	3.60	3.80	4.00
																								km/h			
10 FR	4675	4825	4970																								
20 FR	4210	4340	4475																								
30 FR	3740	3860	3975																								
40 FR	3340	3445	3550																								
50 FR	3005	3100	3150																								
10 DW	3290	3395	3500																								
20 DW	2960	3055	3150																								
30 DW	2630	2715	2800																								
40 DW	2350	2425	2500																								
50 DW	2115	2185	2240																								
500/45 - 22.5	AG 16.00	-	500	1045	471	3167	STD	12	TL	148 A8/144 B	136 A8/132 B													bar	2.30	2.50	2.70
																								km/h			
												10 FR	4020	4215	4410												
												20 FR	3615	3795	3970												
												30 FR	3215	3370	3530												
												40 FR	2870	3010	3150												
												50 FR	2585	2710	2800												
												10 DW	2855	2995	3135												
												20 DW	2570	2695	2820												
												30 DW	2285	2395	2510												
												40 DW	2040	2140	2240												
												50 DW	1835	1925	2000												
												500/45 - 22.5	AG 16.00	-	500	1045	471	3167	STD	16	TL	154 A8/150 B	142 A8/138 B	bar	3.20	3.40	3.60
																								km/h			
10 FR	4900	5075	5250																								
20 FR	4410	4570	4725																								
30 FR	3920	4060	4200																								
40 FR	3500	3625	3750																								
50 FR	3150	3265	3350																								
10 DW	3465	3590	3710																								
20 DW	3120	3230	3340																								
30 DW	2770	2875	2970																								
40 DW	2475	2565	2650																								
50 DW	2230	2310	2360																								

STD: Standard

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
FLOTATION



FLOTATION 648

FLOTATION 648 is particularly suitable for field and road transport as well as for spreading operations. Some sizes are designed for hay harvesters/balers. The special tread design allows for carrying very high loads at low pressure, guaranteeing at the same time reduced soil compaction and preventing damage to crops. FLOTATION 648 is also available as "HD" version for best cut and chip resistance and as "high speed" version to optimize transfer times.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)			
	Rec.	Alt.										↓			
17" 500/50 - 17	AG 16.00	-	510	945	416	2750	STD	10	TL	140 A8/136 B	128 A8/124 B	bar	1.50	1.70	2.00
												km/h			
												10 FR	2960	3185	3500
												20 FR	2665	2865	3150
												30 FR	2370	2550	2800
												40 FR	2115	2275	2500
												50 FR	1905	2050	2240
												10 DW	2130	2290	2520
												20 DW	1915	2060	2270
												30 DW	1700	1830	2015
												40 DW	1520	1635	1800
												50 DW	1370	1470	1600
												500/50 - 17	AG 16.00	-	510
km/h															
10 FR	3950	4160	4550												
20 FR	3555	3740	4095												
30 FR	3160	3325	3640												
40 FR	2820	2970	3250												
50 FR	2540	2675	2900												
10 DW	2795	2940	3220												
20 DW	2515	2645	2900												
30 DW	2235	2350	2575												
40 DW	1995	2100	2300												
50 DW	1795	1890	2060												
500/50 - 17	AG 16.00	-	510	945	416	2750	STD	16	TL	152 A8/148 B	139 A8/135 B				
												km/h			
												10 FR	4790	4880	4970
												20 FR	4310	4390	4475
												30 FR	3830	3905	3975
												40 FR	3420	3485	3550
												50 FR	3080	3135	3150
												10 DW	3275	3340	3400
												20 DW	2950	3005	3060
												30 DW	2620	2670	2720
												40 DW	2340	2385	2430
												50 DW	2105	2145	2180
												500/50 - 17	AG 16.00	-	510
km/h															
10 FR	5605	5690	5775												
20 FR	5045	5120	5200												
30 FR	4485	4555	4620												
40 FR	4005	4065	4125												
50 FR	3605	3660	3750												
10 DW	3940	3995	4060												
20 DW	3545	3595	3655												
30 DW	3155	3200	3250												
40 DW	2815	2855	2900												
50 DW	2535	2570	2575												

STD: Standard



MAIN APPLICATION:
FLOTATION



FLOTATION 648

FLOTATION 648 is particularly suitable for field and road transport as well as for spreading operations. Some sizes are designed for hay harvesters/balers. The special tread design allows for carrying very high loads at low pressure, guaranteeing at the same time reduced soil compaction and preventing damage to crops. FLOTATION 648 is also available as "HD" version for best cut and chip resistance and as "high speed" version to optimize transfer times.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)				
	Rec.	Alt.										↓				
20" 500/55 - 20	16.00	-	508	1058	458	3153	STD	12	TL	150 A8/146 B	138 A8/134 B	bar	2.00	2.20	2.40	
												km/h				
												10 FR	4215	4460	4690	
												20 FR	3795	4015	4220	
												30 FR	3370	3565	3750	
												40 FR	3010	3185	3350	
												50 FR	2710	2865	3000	
												10 DW	2970	3145	3305	
												20 DW	2670	2830	2975	
												30 DW	2375	2515	2645	
												40 DW	2120	2245	2360	
												50 DW	1910	2020	2120	
22.5" 350/65 - 22.5	AG 11.75	-	358	1030	451	3069	STD	18	TL	151 A8/147 B	139 A8/135 B	bar	2.00	3.00	4.00	5.00
												km/h				
												10 FR	2830	3585	4240	4830
												20 FR	2545	3225	3820	4345
												30 FR	2260	2865	3395	3865
												40 FR	2020	2560	3030	3450
												50 FR	1820	2305	2725	3075
												10 DW	1990	2520	2990	3400
												20 DW	1790	2270	2690	3060
												30 DW	1590	2015	2390	2720
												40 DW	1420	1800	2135	2430
												50 DW	1280	1620	1920	2180
385/65 - 22.5 (400/65 - 22.5)	AG 11.75	-	400	1070	475	3233	STD	16	TL	156 A8/152 B	144 A8/140 B	bar	1.50	2.50	3.50	
												km/h				
												10 FR	3410	4600	5600	
												20 FR	3070	4140	5040	
												30 FR	2725	3680	4480	
												40 FR	2435	3285	4000	
												50 FR	2190	2955	3550	
												10 DW	2385	3220	3920	
												20 DW	2150	2900	3530	
												30 DW	1910	2575	3135	
												40 DW	1705	2300	2800	
												50 DW	1535	2070	2500	
385/65 - 22.5 (400/65 - 22.5)	AG 11.75	-	400	1070	475	3233	STD	18	TL	160 A8/ 156 B	148 A8/144 B	bar	3.80	4.00	4.30	
												km/h				
												10 FR	5860	6040	6300	
												20 FR	5275	5435	5670	
												30 FR	4685	4835	5040	
												40 FR	4185	4315	4500	
												50 FR	3765	3885	4000	
												10 DW	4100	4230	4410	
												20 DW	3690	3805	3970	
												30 DW	3280	3380	3530	
												40 DW	2930	3020	3150	
												50 DW	2635	2720	2800	

STD: Standard

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
FLOTATION



FLOTATION 648

FLOTATION 648 is particularly suitable for field and road transport as well as for spreading operations. Some sizes are designed for hay harvesters/balers. The special tread design allows for carrying very high loads at low pressure, guaranteeing at the same time reduced soil compaction and preventing damage to crops. FLOTATION 648 is also available as "HD" version for best cut and chip resistance and as "high speed" version to optimize transfer times.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)			
	Rec.	Alt.										↓			
22.5" 385/65 - 22.5 (400/65 - 22.5)	AG 11.75	-	400	1070	475	3233	STD	22	TL	167 A8/163 B	155 A8/151 B	bar	5.30	5.60	5.90
												km/h			
												10 FR	7170	7400	7630
												20 FR	6450	6660	6865
												30 FR	5735	5920	6105
												40 FR	5120	5285	5450
												50 FR	4610	4755	4875
												10 DW	5095	5265	5425
												20 DW	4585	4740	4885
												30 DW	4075	4210	4340
												40 DW	3640	3760	3875
												50 DW	3275	3385	3450
												400/60 - 22.5 (385/65 - 22.5)	AG 11.75	-	400
km/h															
10 FR	3410	4600	5600												
20 FR	3070	4140	5040												
30 FR	2725	3680	4480												
40 FR	2435	3285	4000												
50 FR	2190	2955	3550												
10 DW	2385	3220	3920												
20 DW	2150	2900	3530												
30 DW	1910	2575	3135												
40 DW	1705	2300	2800												
50 DW	1535	2070	2500												
400/60 - 22.5 (385/65 - 22.5)	AG 11.75	-	400	1070	475	3233	STD	18	TL	160 A8/ 156 B	148 A8/144 B				
												km/h			
												10 FR	5860	6040	6300
												20 FR	5275	5435	5670
												30 FR	4685	4835	5040
												40 FR	4185	4315	4500
												50 FR	3765	3885	4000
												10 DW	4100	4230	4410
												20 DW	3690	3805	3970
												30 DW	3280	3380	3530
												40 DW	2930	3020	3150
												50 DW	2635	2720	2800

STD: Standard



MAIN APPLICATION:
FLOTATION



FLOTATION 648

FLOTATION 648 is particularly suitable for field and road transport as well as for spreading operations. Some sizes are designed for hay harvesters/balers. The special tread design allows for carrying very high loads at low pressure, guaranteeing at the same time reduced soil compaction and preventing damage to crops. FLOTATION 648 is also available as "HD" version for best cut and chip resistance and as "high speed" version to optimize transfer times.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)			
	Rec.	Alt.										bar	km/h	km/h	
22.5" 400/60 - 22.5 (385/65 - 22.5)	AG 11.75	-	400	1070	475	3233	STD	22	TL	167 A8/163 B	155 A8/151 B	bar	5.30	5.60	5.90
												km/h			
												10 FR	7170	7400	7630
												20 FR	6450	6660	6865
												30 FR	5735	5920	6105
												40 FR	5120	5285	5450
												50 FR	4610	4755	4875
												10 DW	5095	5265	5425
												20 DW	4585	4740	4885
												30 DW	4075	4210	4340
												40 DW	3640	3760	3875
												50 DW	3275	3385	3450
												500/50 - 22.5	AG 16.00	-	500
km/h															
10 FR	3970	4695	4970												
20 FR	3570	4225	4475												
30 FR	3175	3760	3975												
40 FR	2835	3355	3550												
50 FR	2550	3020	3150												
10 DW	2800	3310	3500												
20 DW	2520	2980	3150												
30 DW	2240	2650	2800												
40 DW	2000	2365	2500												
50 DW	1800	2130	2240												
500/50 - 22.5	AG 16.00	-	500	1070	475	3200	STD	16	TL	158 A8/155 B	146 A8/142 B				
												km/h			
												10 FR	5475	5710	5950
												20 FR	4925	5140	5355
												30 FR	4380	4570	4760
												40 FR	3910	4080	4250
												50 FR	3520	3670	3875
												10 DW	3865	4030	4200
												20 DW	3480	3630	3780
												30 DW	3090	3225	3360
												40 DW	3760	2880	3000
												50 DW	2485	2590	2650

STD: Standard



MAIN APPLICATION:
FLOTATION



FLOTATION 648

FLOTATION 648 is particularly suitable for field and road transport as well as for spreading operations. Some sizes are designed for hay harvesters/balers. The special tread design allows for carrying very high loads at low pressure, guaranteeing at the same time reduced soil compaction and preventing damage to crops. FLOTATION 648 is also available as "HD" version for best cut and chip resistance and as "high speed" version to optimize transfer times.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)			
	Rec.	Alt.										↓			
22.5" 500/50 - 22.5	AG 16.00	-	500	1070	475	3200	STD	20	TL	163 A8/159 B	151 A8/147 B	bar	3.40	3.60	3.80
												km/h			
												10 FR	6400	6615	6825
												20 FR	5760	5955	6145
												30 FR	5120	5290	5460
												40 FR	4570	4725	4875
												50 FR	4115	4255	4375
												10 DW	4530	4685	4830
												20 DW	4075	4215	4345
												30 DW	3625	3745	3865
												40 DW	3235	3345	3450
												50 DW	2910	3010	3075
500/60 - 22.5	AG 16.00	15.00; 17.00	500	1170	510	3489	STD	12	TL	157 A8/154 B	145 A8/142 B	bar	1.50	2.00	2.40
												km/h			
												10 FR	4390	5195	5775
												20 FR	3950	4675	5200
												30 FR	3510	4155	4620
												40 FR	3135	3710	4125
												50 FR	2820	3340	3750
												10 DW	3085	3645	4060
												20 DW	2780	3280	3655
												30 DW	2470	2920	3250
												40 DW	2205	2605	2900
												50 DW	1985	2345	2650
500/60 - 22.5	AG 16.00	15.00 ; 17.00	500	1170	510	3489	STD	16	TL	163 A8/159 B	151 A8/148 B	bar	2.80	3.00	3.20
												km/h			
												10 FR	6315	6575	6825
												20 FR	5685	5915	6145
												30 FR	5050	5260	5460
												40 FR	4510	4695	4875
												50 FR	4060	4225	4375
												10 DW	4465	4650	4830
												20 DW	4020	4185	4345
												30 DW	3575	3720	3865
												40 DW	3190	3320	3450
												50 DW	2870	2990	3150

STD: Standard



**MAIN APPLICATION:
FLOTATION**



FLOTATION 648

FLOTATION 648 is particularly suitable for field and road transport as well as for spreading operations. Some sizes are designed for hay harvesters/balers. The special tread design allows for carrying very high loads at low pressure, guaranteeing at the same time reduced soil compaction and preventing damage to crops. FLOTATION 648 is also available as "HD" version for best cut and chip resistance and as "high speed" version to optimize transfer times.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)			
	Rec.	Alt.										↓			
22.5" 500/60 - 22.5	AG 16.00	15.00 ; 17.00	500	1170	510	3489	STD	18	TL	165 A8/161 B	153 A8/149 B	bar	3.40	3.50	3.60
												km/h			
												10 FR	6970	7090	7210
												20 FR	6275	6380	6940
												30 FR	5580	5675	5770
												40 FR	4980	5065	5150
												50 FR	4480	4560	4625
												10 DW	4940	5025	5110
												20 DW	4450	4525	4600
												30 DW	3955	4020	4090
												40 DW	3530	3590	3650
												50 DW	3175	3230	3250
												550/45 - 22.5	AG 16.00	-	550
km/h															
10 FR	5600	5865	6125												
20 FR	5040	5280	5515												
30 FR	4480	4695	4900												
40 FR	4000	4190	4375												
50 FR	3600	3770	4000												
10 DW	3935	4125	4305												
20 DW	3540	3710	3875												
30 DW	3145	3300	3445												
40 DW	2810	2945	3075												
50 DW	2530	2650	2800												
550/45 - 22.5	AG 16.00	-	550	1070	475	3203	STD	20	TL	166 A8/162 B	154 A8/150 B				
												km/h			
												10 FR	6270	6860	7420
												20 FR	5645	6175	6680
												30 FR	5020	5490	5935
												40 FR	4480	4900	5300
												50 FR	4030	4410	4750
												10 DW	4440	4860	5250
												20 DW	3995	4370	4725
												30 DW	3550	3885	4200
												40 DW	3170	3470	3750
												50 DW	2855	3125	3350

STD: Standard



MAIN APPLICATION:
FLOTATION



FLOTATION 648

FLOTATION 648 is particularly suitable for field and road transport as well as for spreading operations. Some sizes are designed for hay harvesters/balers. The special tread design allows for carrying very high loads at low pressure, guaranteeing at the same time reduced soil compaction and preventing damage to crops. FLOTATION 648 is also available as "HD" version for best cut and chip resistance and as "high speed" version to optimize transfer times.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)			
	Rec.	Alt.										↓			
22.5" 550/60 - 22.5	AG 16.00	-	550	1240	540	3725	STD	12	TL	160 A8/156 B	148 A8/144 B	bar	1.50	1.80	2.10
												km/h			
												10 FR	5175	5755	6300
												20 FR	4655	5180	5670
												30 FR	4140	4605	5040
												40 FR	3695	4110	4500
												50 FR	3325	3700	4000
												10 DW	3620	4030	4410
												20 DW	3255	3630	3970
												30 DW	2895	3225	3530
												40 DW	2585	2880	3150
												50 DW	2325	2590	2800
												550/60 - 22.5	AG 16.00	-	550
km/h															
10 FR	7820	7975	8120												
20 FR	7035	7175	7310												
30 FR	6255	6380	6495												
40 FR	5585	5695	5800												
50 FR	5025	5125	5150												
10 DW	5390	5495	5600												
20 DW	4850	4945	5040												
30 DW	4310	4395	4480												
40 DW	3850	3925	4000												
50 DW	3465	3535	3550												
550/60 - 22.5	AG 16.00	-	550	1240	540	3725	STD	20	TL	171 A8/167 B	158 A8/154 B				
												km/h			
												10 FR	8315	8465	8610
												20 FR	7485	7615	7750
												30 FR	6655	6770	6890
												40 FR	5940	6045	6150
												50 FR	5345	5440	5450
												10 DW	5745	5850	5950
												20 DW	5170	5265	5355
												30 DW	4600	4680	4760
												40 DW	4105	4180	4250
												50 DW	3625	3685	3750
												550/60 - 22.5	AG 16.00	-	550
km/h															
10 FR	8315	8465	8610												
20 FR	7485	7615	7750												
30 FR	6655	6770	6890												
40 FR	5940	6045	6150												
50 FR	5345	5440	5450												
10 DW	5745	5850	5950												
20 DW	5170	5265	5355												
30 DW	4600	4680	4760												
40 DW	4105	4180	4250												
50 DW	3625	3685	3750												

STD: Standard
DB: Dual Bead



MAIN APPLICATION:
FLOTATION



FLOTATION 648

FLOTATION 648 is particularly suitable for field and road transport as well as for spreading operations. Some sizes are designed for hay harvesters/balers. The special tread design allows for carrying very high loads at low pressure, guaranteeing at the same time reduced soil compaction and preventing damage to crops. FLOTATION 648 is also available as "HD" version for best cut and chip resistance and as "high speed" version to optimize transfer times.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)			
	Rec.	Alt.										↓			
22.5" 600/50 - 22.5	AG 20.00	-	600	1170	510	3501	STD	12	TL	159 A8/156 B	147 A8/144 B	bar	1.50	1.70	2.00
												km/h			
												10 FR	5175	5570	6125
												20 FR	4655	5015	5515
												30 FR	4140	4460	4900
												40 FR	3695	3980	4375
												50 FR	3325	3580	4000
												10 DW	3640	3915	4305
												20 DW	3275	3520	3875
												30 DW	2910	3130	3445
												40 DW	2600	2795	3075
												50 DW	2340	2515	2800
												600/50 - 22.5	AG 20.00	-	600
km/h															
10 FR	6540	6880	7210												
20 FR	5885	6195	6490												
30 FR	5230	5505	5770												
40 FR	4670	4915	5150												
50 FR	4205	4425	4625												
10 DW	4635	4880	5110												
20 DW	4170	4390	4600												
30 DW	3705	3905	4090												
40 DW	3310	3485	3650												
50 DW	2980	3135	3250												
600/50 - 22.5	AG 20.00	-	600	1170	510	3501	STD	18	TL	167 A8/163 B	155 A8/151 B				
												km/h			
												10 FR	7315	7475	7630
												20 FR	6585	6730	6865
												30 FR	5850	5980	6105
												40 FR	5225	5340	5450
												50 FR	4705	4805	4875
												10 DW	5200	5315	5425
												20 DW	4680	4780	4885
												30 DW	4160	4250	4340
												40 DW	3715	3795	3875
												50 DW	3345	3415	3450
												600/50 - 22.5	AG 20.00	-	600
km/h															
10 FR	7820	7975	8120												
20 FR	7035	7175	7310												
30 FR	6255	6380	6495												
40 FR	5585	5695	5800												
50 FR	5025	5125	5150												
10 DW	5390	5495	5600												
20 DW	4850	4945	5040												
30 DW	4310	4395	4480												
40 DW	3850	3925	4000												
50 DW	3465	3535	3550												

STD: Standard
DB: Dual Bead



MAIN APPLICATION:
FLOTATION



FLOTATION 648

FLOTATION 648 is particularly suitable for field and road transport as well as for spreading operations. Some sizes are designed for hay harvesters/balers. The special tread design allows for carrying very high loads at low pressure, guaranteeing at the same time reduced soil compaction and preventing damage to crops. FLOTATION 648 is also available as "HD" version for best cut and chip resistance and as "high speed" version to optimize transfer times.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)			
	Rec.	Alt.										↓			
22.5" 600/55 - 22.5	AG 20.00	-	600	1230	540	3716	STD	12	TL	164 A8/160 B	151 A8/ 148 B	bar	1.50	1.70	2.00
												km/h			
												10 FR	5915	6365	7000
												20 FR	5325	5725	6300
												30 FR	4730	5090	5600
												40 FR	4225	4545	5000
												50 FR	3805	4090	4500
												10 DW	4080	4390	4830
												20 DW	3675	3950	4345
												30 DW	3265	3510	3865
												40 DW	2915	3135	3450
												50 DW	2625	2820	3150
												600/55 - 22.5	AG 20.00	-	600
km/h															
10 FR	7365	7750	8120												
20 FR	6630	6975	7310												
30 FR	5890	6200	6495												
40 FR	5260	5535	5800												
50 FR	4735	4980	5300												
10 DW	5080	5340	5600												
20 DW	4575	4805	5040												
30 DW	4065	4275	4480												
40 DW	3630	3815	4000												
50 DW	3265	3435	3650												
600/55 - 22.5	AG 20.00	-	600	1230	540	3716	DB	20	TL	173 A8/169 B	160 A8/156 B				
												km/h			
												10 FR	8765	8930	9100
												20 FR	7890	8040	8190
												30 FR	7010	7145	7280
												40 FR	6260	6380	6500
												50 FR	5635	5740	5800
												10 DW	6070	6180	6300
												20 DW	5460	5565	5670
												30 DW	4855	4945	5040
												40 DW	4335	4415	4500
												50 DW	3900	3975	4000
												700/40 - 22.5	AG 24.00	-	700
km/h															
10 FR	5850	6085	6300												
20 FR	5265	5475	5670												
30 FR	4680	4865	5040												
40 FR	4180	4345	4500												
50 FR	3760	3910	4125												
10 DW	4100	4255	4410												
20 DW	3690	3830	3970												
30 DW	3280	3405	3530												
40 DW	2930	3040	3150												
50 DW	2635	2735	2800												

STD: Standard
DB: Dual Bead



MAIN APPLICATION:
FLOTATION



FLOTATION 648

FLOTATION 648 is particularly suitable for field and road transport as well as for spreading operations. Some sizes are designed for hay harvesters/balers. The special tread design allows for carrying very high loads at low pressure, guaranteeing at the same time reduced soil compaction and preventing damage to crops. FLOTATION 648 is also available as "HD" version for best cut and chip resistance and as "high speed" version to optimize transfer times.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)			
	Rec.	Alt.										↓			
22.5" 700/40 - 22.5	AG 24.00	-	700	1170	510	3537	STD	16	TL	166 A8/ 162 B	154 A8/150 B	bar	1.80	2.00	2.20
												km/h			
												10 FR	6600	7020	7420
												20 FR	5940	6320	6680
												30 FR	5280	5615	5935
												40 FR	4715	5015	5300
												50 FR	4245	4515	4750
												10 DW	4670	4965	5250
												20 DW	4200	4465	4725
												30 DW	3735	3970	4200
												40 DW	3335	3545	3750
												50 DW	3000	3190	3350
												700/40 - 22.5	AG 24.00	-	700
km/h															
10 FR	8415	8765	9100												
20 FR	7575	7890	8190												
30 FR	6730	7010	7280												
40 FR	6010	6260	6500												
50 FR	5410	5635	5800												
10 DW	5825	6070	6300												
20 DW	5240	5460	5670												
30 DW	4660	4855	5040												
40 DW	4160	4335	4500												
50 DW	3745	3900	4000												
700/50 - 22.5	24.00	-	700	1270	550	3775	STD	12	TL	168 A8/164 B	156 A8/153 B				
												km/h			
												10 FR	7050	7315	7840
												20 FR	6345	6585	7055
												30 FR	5640	5850	6270
												40 FR	5035	5225	5600
												50 FR	4530	4705	5000
												10 DW	5035	5230	5600
												20 DW	4530	4705	5040
												30 DW	4025	4185	4480
												40 DW	3595	3735	4000
												50 DW	3235	3360	3650

STD: Standard
HD: Heavy Duty



MAIN APPLICATION:
FLOTATION



FLOTATION 648

FLOTATION 648 is particularly suitable for field and road transport as well as for spreading operations. Some sizes are designed for hay harvesters/balers. The special tread design allows for carrying very high loads at low pressure, guaranteeing at the same time reduced soil compaction and preventing damage to crops. FLOTATION 648 is also available as "HD" version for best cut and chip resistance and as "high speed" version to optimize transfer times.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)				
	Rec.	Alt.										↓				
22.5" 700/50 - 22.5	24.00	-	700	1270	550	3775	STD	16	TL	174 A8/170 B	162 A8/158 B	bar	2.00	2.20	2.40	
												km/h				
	10 FR	8430	8910	9380												
	20 FR	7585	8020	8440												
	30 FR	6740	7130	7505												
	40 FR	6020	6365	6700												
	50 FR	5420	5730	6000												
	10 DW	5980	6320	6650												
	20 DW	5380	5690	5985												
	30 DW	4780	5055	5320												
	40 DW	4270	4515	4750												
	50 DW	3845	4065	4250												
	700/50 - 22.5	24.00	-	700	1270	550	3775	HS	16	TL	170 B/166 E	158 B/154 E	bar	2.00	2.20	2.40
													km/h			
10 FR		8430	8910	9380												
20 FR		7585	8020	8440												
30 FR		6740	7130	7505												
40 FR		6020	6365	6700												
50 FR		5420	5730	6000												
70 FR		4755	5030	5300												
10 DW		5980	6320	6650												
20 DW		5380	5690	5985												
30 DW		4780	5055	5320												
40 DW		4270	4515	4750												
50 DW		3845	4065	4250												
70 DW		3375	3565	3750												
26.5" 600/55 - 26.5	AG 20.00	-	600	1354	581	4017	STD	12	TL	165 A8/161 B	153 A8/149 B	bar	1.50	1.80	2.00	
												km/h				
	10 FR	6090	6775	7210												
	20 FR	5480	6100	6490												
	30 FR	4870	5420	5770												
	40 FR	4350	4840	5150												
	50 FR	3915	4355	4625												
	10 DW	4320	4800	5110												
	20 DW	3885	4320	4600												
	30 DW	3455	3840	4090												
	40 DW	3085	3430	3650												
	50 DW	2775	3085	3250												
	600/55 - 26.5	AG 20.00	-	600	1354	581	4017	STD	16	TL	170 A8/167 B	159 A8/156 B	bar	2.20	2.40	2.60
													km/h			
10 FR		7615	8015	8400												
20 FR		6855	7215	7560												
30 FR		6095	6410	6720												
40 FR		5440	5725	6000												
50 FR		4895	5155	5450												
10 DW		5560	5845	6125												
20 DW		5000	5260	5515												
30 DW		4445	4675	4900												
40 DW		3970	4175	4375												
50 DW		3575	3760	4000												

STD: Standard
HS: High Speed



MAIN APPLICATION:
FLOTATION



FLOTATION 648

FLOTATION 648 is particularly suitable for field and road transport as well as for spreading operations. Some sizes are designed for hay harvesters/balers. The special tread design allows for carrying very high loads at low pressure, guaranteeing at the same time reduced soil compaction and preventing damage to crops. FLOTATION 648 is also available as "HD" version for best cut and chip resistance and as "high speed" version to optimize transfer times.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)			
	Rec.	Alt.										bar	km/h	km/h	km/h
26.5" 600/55 - 26.5	AG 20.00	-	600	1354	581	4017	STD	18	TL	172 A6/169 B	160 A8/157 B	bar	2.70	2.80	2.90
												km/h			
												10 FR	8455	8640	8820
												20 FR	7610	7775	7940
												30 FR	6765	6910	7055
												40 FR	6040	6170	6300
												50 FR	5435	5555	5800
												10 DW	6040	6175	6300
												20 DW	5435	5555	5670
												30 DW	4835	4940	5040
												40 DW	4315	4410	4500
												50 DW	3885	3970	4125
												700/50 - 26.5	24.00	-	700
km/h															
10 FR	7300	7580	8120												
20 FR	6570	6825	7310												
30 FR	5840	6065	6495												
40 FR	5215	5415	5800												
50 FR	4695	4875	5150												
10 DW	5195	5390	5775												
20 DW	4675	4850	5200												
30 DW	4155	4310	4620												
40 DW	3710	3850	4125												
50 DW	3340	3465	3750												
700/50 - 26.5	24.00	-	700	1354	581	4017	STD	16	TL	174 A8/170 B	162 A8/158 B				
												km/h			
												10 FR	8430	8910	9380
												20 FR	7585	8020	8440
												30 FR	6740	7130	7505
												40 FR	6020	6365	6700
												50 FR	5420	5730	6000
												10 DW	5980	6320	6650
												20 DW	5380	5690	5985
												30 DW	4780	5055	5320
												40 DW	4270	4515	4750
												50 DW	3845	4065	4250
												800/45 - 26.5	AG 28.00	-	800
km/h															
10 FR	7805	8105	8400												
20 FR	7025	7295	7560												
30 FR	6245	6485	6720												
40 FR	5575	5790	6000												
50 FR	5020	5210	5450												
10 DW	5530	5740	5950												
20 DW	4975	5165	5355												
30 DW	4425	4590	4760												
40 DW	3950	4100	4250												
50 DW	3555	3690	3875												

STD: Standard

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
FLOTATION



FLOTATION 648

FLOTATION 648 is particularly suitable for field and road transport as well as for spreading operations. Some sizes are designed for hay harvesters/balers. The special tread design allows for carrying very high loads at low pressure, guaranteeing at the same time reduced soil compaction and preventing damage to crops. FLOTATION 648 is also available as "HD" version for best cut and chip resistance and as "high speed" version to optimize transfer times.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)														
	Rec.	Alt.										↓														
26.5" 800/45 - 26.5	AG 28.00	-	800	1354	581	4017	STD	16	TL	177 A8/173 B	164 A8/160 B	bar														
												km/h	1.80	2.00	2.20											
												10 FR	9085	9665	10220											
												20 FR	8175	8700	9200											
												30 FR	7270	7735	8175											
												40 FR	6490	6905	7300											
												50 FR	5840	6215	6500											
												10 DW	6225	6620	7000											
												20 DW	5600	5960	6300											
												30 DW	4980	5300	5600											
												40 DW	4445	4730	5000											
												50 DW	4000	4225	4500											
												800/45 - 26.5	AG 28.00	-	800	1354	581	4017	STD	20	TL	183 A8/180 B	170 A8/167 B	bar		
																								km/h	2.60	2.70
10 FR	11730	11990	12250																							
20 FR	10560	10790	11025																							
30 FR	9385	9595	9800																							
40 FR	8380	8565	8750																							
50 FR	7540	7710	8000																							
10 DW	8045	8225	8400																							
20 DW	7240	7405	7560																							
30 DW	6435	6580	6720																							
40 DW	5745	5875	6000																							
50 DW	5170	5290	5450																							
30.5" 650/65 - 30.5	AG 20.00	-	650	1650	710	4935	STD	12	TL	174 A8/170 B	162 A8/158 B													bar		
																								km/h	1.50	1.60
												10 FR	8715	9050	9380											
												20 FR	7845	8145	8440											
												30 FR	6970	7240	7505											
												40 FR	6225	6465	6700											
												50 FR	5605	5820	6000											
												10 DW	6180	6420	6650											
												20 DW	5565	5775	5985											
												30 DW	4945	5135	5320											
												40 DW	4415	4585	4750											
												50 DW	3975	4125	4250											
												650/65 - 30.5	AG 20.00	-	650	1650	710	4935	STD	16	TL	179 A8/175 B	167 A8/163 B	bar		
																								km/h	1.80	2.00
10 FR	9645	10260	10850																							
20 FR	8680	9235	9765																							
30 FR	7715	8210	8680																							
40 FR	6890	7330	7750																							
50 FR	6200	6595	6900																							
10 DW	6785	7215	7630																							
20 DW	6105	6495	6865																							
30 DW	5425	5775	6105																							
40 DW	4845	5155	5450																							
50 DW	4360	4640	4875																							

STD: Standard



MAIN APPLICATION:
FLOTATION



FLOTATION 648

FLOTATION 648 is particularly suitable for field and road transport as well as for spreading operations. Some sizes are designed for hay harvesters/balers. The special tread design allows for carrying very high loads at low pressure, guaranteeing at the same time reduced soil compaction and preventing damage to crops. FLOTATION 648 is also available as "HD" version for best cut and chip resistance and as "high speed" version to optimize transfer times.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)															
	Rec.	Alt.										↓															
30.5" 650/65 - 30.5	AG 20.00	-	650	1650	710	4935	HD	16	TL	179 A8/175 B	167 A8/163 B	bar	1.80	2.00	2.20												
												km/h															
												10 FR	9645	10260	10850												
												20 FR	8680	9235	9765												
												30 FR	7715	8210	8680												
												40 FR	6890	7330	7750												
												50 FR	6200	6595	6900												
												10 DW	6785	7215	7630												
												20 DW	6105	6495	6865												
												30 DW	5425	5775	6105												
												40 DW	4845	5155	5450												
												50 DW	4360	4640	4875												
												650/65 - 30.5	AG 20.00	-	650	1650	710	4935	HD	18	TL	181 A8/178 B	169 A8/165 B	bar	2.30	2.40	2.50
																								km/h			
10 FR	10995	11275	11550																								
20 FR	9895	10150	10395																								
30 FR	8800	9020	9240																								
40 FR	7855	8055	8250																								
50 FR	7070	7250	7500																								
10 DW	7735	7930	8120																								
20 DW	6960	7140	7310																								
30 DW	6190	6345	6495																								
40 DW	5525	5665	5800																								
50 DW	4975	5100	5150																								
750/60 - 30.5	AG 24.00	-	750	1650	710	4935	STD	12	TL	176 A8/172 B	164 A8/160 B													bar	1.50	1.60	1.70
																								km/h			
												10 FR	9240	9595	9940												
												20 FR	8315	8635	8945												
												30 FR	7390	7680	7950												
												40 FR	6600	6855	7100												
												50 FR	5940	6170	6300												
												10 DW	6505	6755	7000												
												20 DW	5855	6080	6300												
												30 DW	5200	5405	5600												
												40 DW	4645	4825	5000												
												50 DW	4180	4345	4500												
												750/60 - 30.5	AG 24.00	-	750	1650	710	4935	STD	16	TL	182 A8/179 B	170 A8/167 B	bar	1.80	2.00	2.20
																								km/h			
10 FR	10585	11255	11900																								
20 FR	9525	10130	10710																								
30 FR	8465	9005	9520																								
40 FR	7560	8040	8500																								
50 FR	6805	7235	7750																								
10 DW	7470	7945	8400																								
20 DW	6720	7150	7560																								
30 DW	5975	6355	6720																								
40 DW	5335	5675	6000																								
50 DW	4800	5110	5450																								

STD: Standard
HD: Heavy Duty



MAIN APPLICATION:
FLOTATION



FLOTATION 648

FLOTATION 648 is particularly suitable for field and road transport as well as for spreading operations. Some sizes are designed for hay harvesters/balers. The special tread design allows for carrying very high loads at low pressure, guaranteeing at the same time reduced soil compaction and preventing damage to crops. FLOTATION 648 is also available as "HD" version for best cut and chip resistance and as "high speed" version to optimize transfer times.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)			
	Rec.	Alt.										↓			
30.5" 850/50 - 30.5	AG 28.00	-	850	1650	710	4935	STD	12	TL	180 A8/176 B	168 A8/164 B	bar	1.10	1.30	1.50
												km/h			
												10 FR	9345	10305	11200
												20 FR	8410	9275	10080
												30 FR	7475	8245	8960
												40 FR	6675	7360	8000
												50 FR	6010	6625	7100
												10 DW	6540	7210	7840
												20 DW	5885	6490	7055
												30 DW	5230	5770	6270
												40 DW	4670	5150	5600
												50 DW	4205	4635	5000
												850/50 - 30.5	AG 28.00	-	850
km/h															
10 FR	11830	12580	13300												
20 FR	10645	11320	11970												
30 FR	9465	10065	10640												
40 FR	8450	8985	9500												
50 FR	7605	8085	8500												
10 DW	8345	8870	9380												
20 DW	7510	7980	8440												
30 DW	6675	7095	7505												
40 DW	5960	6335	6700												
50 DW	5365	5700	6000												
850/50 - 30.5	AG 28.00	-	850	1650	710	4935	HD	16	TL	186 A8/182 B	174 A8/170 B				
												km/h			
												10 FR	11830	12580	13300
												20 FR	10645	11320	11970
												30 FR	9465	10065	10640
												40 FR	8450	8985	9500
												50 FR	7605	8085	8500
												10 DW	8345	8870	9380
												20 DW	7510	7980	8440
												30 DW	6675	7095	7505
												40 DW	5960	6335	6700
												50 DW	5365	5700	6000
												850/50 - 30.5	AG 28.00	-	850
km/h															
10 FR	13735	14075	14420												
20 FR	12360	12670	12980												
30 FR	10985	11260	11535												
40 FR	9810	10055	10300												
50 FR	8830	9050	9250												
10 DW	9465	9700	9940												
20 DW	8520	8730	8945												
30 DW	7570	7760	7950												
40 DW	6760	6930	7100												
50 DW	6085	6235	6500												

STD: Standard
HD: Heavy Duty



MAIN APPLICATION:
FLOTATION



FLOTATION 648 T

FLOTATION 648 T is particularly suitable for field and road transport as well as for hay harvesting. Its tread design allows for carrying very high loads at low pressure and ensures outstanding self-cleaning properties. In line with BKT's commitment to provide products supporting the farming business, FLOTATION 648 T maximizes your yield and takes care of the land.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)			
	Rec.	Alt.										↓			
22.5" 550/45 - 22.5	AG 16.00	-	550	1070	475	3203	STD	16	TL	159 A8/156 B	147 A8/144 B	bar	2.40	2.60	2.80
												km/h			
												10 FR	5600	5865	6125
												20 FR	5040	5280	5515
												30 FR	4480	4695	4900
												40 FR	4000	4190	4375
												50 FR	3600	3770	4000
												10 DW	3935	4125	4305
												20 DW	3540	3710	3875
												30 DW	3145	3300	3445
												40 DW	2810	2945	3075
												50 DW	2530	2650	2800
												550/45 - 22.5	AG 16.00	-	550
km/h															
10 FR	6270	6860	7420												
20 FR	5645	6175	6680												
30 FR	5020	5490	5935												
40 FR	4480	4900	5300												
50 FR	4030	4410	4750												
10 DW	4440	4860	5250												
20 DW	3995	4370	4725												
30 DW	3550	3885	4200												
40 DW	3170	3470	3750												
50 DW	2855	3125	3350												

STD: Standard



MAIN APPLICATION:
FLOTATION



FLOTATION TR 675

FLOTATION TR 675 is best suited for soil tillage operations and transport. It fits trailers, compact dumpers and implement machinery. FLOTATION TR 675 has been engineered to provide outstanding traction remaining gentle on the ground to prevent crop damages.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)															
	Rec.	Alt.										↓															
22.5" 500/60 - 22.5	AG 16.00	15.00; 17.00	500	1181	534	3505	STD	12	TL	157 A8/154 B	145 A8/142 B	bar	1.50	2.00	2.40												
												km/h															
												10 FR	4390	5195	5775												
												20 FR	3950	4675	5200												
												30 FR	3510	4155	4620												
												40 FR	3135	3710	4125												
												50 FR	2820	3340	3750												
												10 DW	3085	3645	4060												
												20 DW	2780	3280	3655												
												30 DW	2470	2920	3250												
												40 DW	2205	2605	2900												
												50 DW	1985	2345	2650												
												500/60 - 22.5	AG 16.00	15.00; 17.00	500	1181	534	3505	STD	16	TL	163 A8/159 B	151 A8/ 148 B	bar	2.80	3.00	3.20
																								km/h			
10 FR	6315	6575	6825																								
20 FR	5685	5915	6145																								
30 FR	5050	5260	5460																								
40 FR	4510	4695	4875																								
50 FR	4060	4225	4375																								
10 DW	4465	4650	4830																								
20 DW	4020	4185	4345																								
30 DW	3575	3720	3865																								
40 DW	3190	3320	3450																								
50 DW	2870	2990	3150																								
500/60 - 22.5	AG 16.00	15.00; 17.00	500	1181	534	3505	DB	20	TL	168 A8/164 B	155 A8/151 B													bar	3.70	3.80	4.00
																								km/h			
												10 FR	7425	7545	7840												
												20 FR	6685	6790	7055												
												30 FR	5940	6035	6270												
												40 FR	5305	5390	5600												
												50 FR	4775	4850	5000												
												10 DW	5255	5340	5425												
												20 DW	4730	4805	4885												
												30 DW	4205	4275	4340												
												40 DW	3755	3815	3875												
												50 DW	3380	3435	3450												
												550/45 - 22.5	AG 16.00	-	543	1070	-	-	STD	20	TL	166 A8/162 B	154 A8/150 B	bar	3.00	3.50	4.00
																								km/h			
10 FR	6270	6860	7420																								
20 FR	5645	6175	6680																								
30 FR	5020	5490	5935																								
40 FR	4480	4900	5300																								
50 FR	4030	4410	4750																								
10 DW	4440	4860	5250																								
20 DW	3995	4370	4725																								
30 DW	3550	3885	4200																								
40 DW	3170	3470	3750																								
50 DW	2855	3125	3350																								

STD: Standard
DB: Dual Bead



MAIN APPLICATION:
FLOTATION



FLOTATION TR 675

FLOTATION TR 675 is best suited for soil tillage operations and transport. It fits trailers, compact dumpers and implement machinery. FLOTATION TR 675 has been engineered to provide outstanding traction remaining gentle on the ground to prevent crop damages.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)			
	Rec.	Alt.										↓			
22.5" 550/60 - 22.5	AG 16.00	-	550	1260	547	3640	STD	12	TL	160 A8/156 B	148 A8/144 B	bar	1.50	1.80	2.10
												km/h			
												10 FR	5175	5755	6300
												20 FR	4655	5180	5670
												30 FR	4140	4605	5040
												40 FR	3695	4110	4500
												50 FR	3325	3700	4000
												10 DW	3620	4030	4410
												20 DW	3255	3630	3970
												30 DW	2895	3225	3530
												40 DW	2585	2880	3150
												50 DW	2325	2590	2800
												550/60 - 22.5	AG 16.00	-	550
km/h															
10 FR	6970	7310	7630												
20 FR	6275	6575	6865												
30 FR	5580	5845	6105												
40 FR	4980	5220	5450												
50 FR	4480	4700	4875												
10 DW	4795	5025	5250												
20 DW	4315	4525	4725												
30 DW	3835	4020	4200												
40 DW	3425	3590	3750												
50 DW	3085	3230	3350												

STD: Standard



**MAIN APPLICATION:
FLOTATION**



FLOTATION TR 678

FLOTATION TR 678 has been specially designed for trailers and agricultural implements both on- and off the road. This tire allows for carrying very heavy loads at low pressure ensuring reduced soil compaction at the same time. It provides excellent traction and outstanding self-cleaning properties. FLOTATION TR 678 size 600/40 - 22.5 as dual bead HD version, and size 650/45 - 22.5 all versions are also suitable for excavators.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.											bar	km/h	
15.5"	8.0	-	275	750	357	2250	STD	-	TL	115 A8	-	-	bar	2.40	
													km/h	40	
													40	1215	
280/60 - 15.5	8.0	-	275	750	357	2250	STD	-	TL	128 A8	-	-	bar	4.70	
													km/h	40	
													40	1800	
22.5"	AG 20.00	-	615	1085	483	3264	DB	20	TL	-	169 A8	157 A8	bar	4.10	
													km/h	40 FR	
													40 DW	5800	
	600/40 - 22.5	AG 20.00	-	615	1085	483	3264	DB HD	20	TL	169 A8	-	-	bar	6.00
														km/h	40
														40	5800
	650/45 - 22.5	20.0	-	650	1150	502	3302	STD	-	TL	160 D	-	-	bar	4.00
														km/h	50
														50	4875
	650/45 - 22.5	20.0	-	650	1150	502	3302	STD	20	TL	166 B	-	-	bar	4.50
														km/h	50
														50	5300
650/45 - 22.5	20.0	-	650	1150	502	3302	SB	20	TL	166 B	-	-	bar	4.50	
													km/h	50	
													50	5300	

STD: Standard
 DB: Dual Bead
 DB HD: Dual Bead Heavy Duty
 SB: Steel Belted



MAIN APPLICATION:
FLOTATION



FLOTATION RIB 774

FLOTATION RIB 774 is suitable in all free-rolling applications and ideal for trailers and implement machinery. It has been designed to provide best handling comfort optimizing the timing of operations as well as farmers' productivity.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)			
	Rec.	Alt.										↓			
22.5" 550/60 - 22.5	AG 16.00	-	550	1240	540	3725	STD	12	TL	160 A8/156 B	148 A8/144 B	bar	1.50	1.80	2.10
												km/h			
												10 FR	5175	5755	6300
												20 FR	4655	5180	5670
												30 FR	4140	4605	5040
												40 FR	3695	4110	4500
												50 FR	3325	3700	4000
												10 DW	3620	4030	4410
												20 DW	3255	3630	3970
												30 DW	2895	3225	3530
												40 DW	2585	2880	3150
												50 DW	2325	2590	2800
												550/60 - 22.5	AG 16.00	-	550
km/h															
10 FR	6970	7310	7630												
20 FR	6275	6575	6865												
30 FR	5580	5845	6105												
40 FR	4980	5220	5450												
50 FR	4480	4700	4875												
10 DW	4795	5025	5250												
20 DW	4315	4525	4725												
30 DW	3835	4020	4200												
40 DW	3425	3590	3750												
50 DW	3085	3230	3350												
600/55 - 22.5	AG 20.00	-	600	1230	540	3716	STD	12	TL	164 A8/160 B	151 A8/ 148 B				
												km/h			
												10 FR	5915	6365	7000
												20 FR	5325	5725	6300
												30 FR	4730	5090	5600
												40 FR	4225	4545	5000
												50 FR	3805	4090	4500
												10 DW	4080	4390	4830
												20 DW	3675	3950	4345
												30 DW	3265	3510	3865
												40 DW	2915	3135	3450
												50 DW	2625	2820	3150
												600/55 - 22.5	AG 20.00	-	600
km/h															
10 FR	7365	7750	8120												
20 FR	6630	6975	7310												
30 FR	5890	6200	6495												
40 FR	5260	5535	5800												
50 FR	4735	4980	5300												
10 DW	5080	5340	5600												
20 DW	4575	4805	5040												
30 DW	4065	4275	4480												
40 DW	3630	3815	4000												
50 DW	3265	3435	3650												

STD: Standard

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
FORESTRY



FORESTECH (LS-2)

FORESTECH is a BKT bias steel-belted tire, suitable for forestry applications with forwarders. It provides excellent traction even in heavy-duty service. The strong bead and shoulder area ensure high puncture resistance as well as a longer tire life-cycle. As a result, you can deal with the most difficult operating conditions in a forest without concern.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									↓	
26.5" 600/55 - 26.5	AG 20.00	-	610	1335	618	4032	SB	20	TL	165 A8/172 A2	bar	5.00
											km/h	
											40	5150
											30	5510
											10	6300
710/45 - 26.5	AG 24.00	-	710	1340	620	4047	SB	20	TL	168 A8/175 A2	bar	5.00
											km/h	
											40	5600
											30	5990
											10	6900
750/55 - 26.5	DW 23 B	DW 25 B	755	1485	680	4467	SB	20	TL	177 A8/184 A2	bar	5.00
											km/h	
											40	7300
											30	7810
											10	9000

SB: Steel Belted



**MAIN APPLICATION:
FORESTRY**



FS 216 (LS-2)

FS 216 has a robust lug design with optimum angle and wider width to enhance traction performance for loggers and skidders. It provides excellent cut and chip resistance under the most critical operating conditions and ensures maximum protection against possible damages at any time.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									bar	km/h	10
26" 18.4 - 26	DW 16 A	-	467	1476	682	4433	AB	10	TT	-	bar	2.10	1.70
											km/h	3600	-
											10	-	2575
18.4 - 26	DW 16 A	-	467	1476	682	4433	SB	10	TT	-	bar	2.10	1.70
											km/h	3600	-
											30	-	2575
23.1 - 26	DW 20 A; DW 20 B	-	587	1615	726	4780	AB	10	TT	-	bar	1.70	1.40
											km/h	4540	-
											30	-	3250
23.1 - 26	DW 20 A; DW 20 B	-	587	1615	726	4780	SB	10	TT	-	bar	1.70	1.40
											km/h	4540	-
											30	-	3250
23.1 - 26	DW 20 A; DW 20 B	-	587	1615	726	4780	AB	12	TT	-	bar	2.10	1.70
											km/h	5260	-
											30	-	3750
23.1 - 26	DW 20 A; DW 20 B	-	587	1615	726	4780	SB	12	TT	-	bar	2.10	1.70
											km/h	5260	-
											30	-	3750
23.1 - 26	DW 20 A; DW 20 B	-	587	1615	726	4780	AB	14	TT	-	bar	2.40	2.10
											km/h	5760	-
											30	-	4125
23.1 - 26	DW 20 A; DW 20 B	-	587	1615	726	4780	SB	14	TT	-	bar	2.40	2.10
											km/h	5760	-
											30	-	4125
23.1 - 26	DW 20 A; DW 20 B	-	587	1615	726	4780	AB	16	TT	-	bar	2.80	2.40
											km/h	6300	-
											30	-	4500

AB: Aramid Belted
SB: Steel Belted



MAIN APPLICATION:
FORESTRY



FS 216 (LS-2)

FS 216 has a robust lug design with optimum angle and wider width to enhance traction performance for loggers and skidders. It provides excellent cut and chip resistance under the most critical operating conditions and ensures maximum protection against possible damages at any time.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)				
	Rec.	Alt.									↓				
26"	23.1 - 26	DW 20 A;	-	587	1615	726	4780	SB	16	TT	-	bar	2.80	2.40	
		DW 20 B										km/h	10	6300	-
	23.1 - 26	-	587	1615	726	4780	SB	16	TL	-	bar	2.80	2.40		
											km/h	10	6300	-	
											30	-	4500		
28L - 26	-	720	1660	742	4912	SB	14	TL	-	bar	2.10	1.70			
										km/h	10	5940	-		
										30	-	4250			
28L - 26	-	720	1660	742	4912	SB	18	TL	-	bar	2.80	2.40			
										km/h	10	7100	-		
										30	-	5150			
28L - 26	-	720	1660	742	4912	SB	20	TL	-	bar	2.80	2.40			
										km/h	10	7300	-		
										30	-	5150			
30"	18.4 - 30	DW 16 A	-	467	1577	724	4736	AB	10	TT	-	bar	2.10	1.70	
												km/h	10	3820	-
												30	-	2725	
	18.4 - 30	-	467	1577	724	4736	SB	10	TT	-	bar	2.10	1.70		
											km/h	10	3820	-	
18.4 - 30	-	467	1577	724	4736	SB	14	TT	-	bar	2.80	2.40			
										km/h	10	4750	-		
										30	-	3350			
32"	24. 5 - 32	DH 21	DH 21 B	622	1831	836	5456	SB	16	TL	-	bar	2.40	2.10	
												km/h	10	7000	-
												30	-	5000	

AB: Aramid Belted
SB: Steel Belted



**MAIN APPLICATION:
FORESTRY**



FS 216 (LS-2)

FS 216 has a robust lug design with optimum angle and wider width to enhance traction performance for loggers and skidders. It provides excellent cut and chip resistance under the most critical operating conditions and ensures maximum protection against possible damages at any time.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)			
	Rec.	Alt.									bar	km/h	10	30
32"	30.5L - 32	DH 27	DH 27 B	775	1847	833	5466	AB	16	TL	-	bar	2.10	1.70
												km/h	7450	-
												10	-	5300
	30.5L - 32	DH 27	DH 27 B	775	1847	833	5466	SB	16	TL	-	bar	2.10	1.70
												km/h	7450	-
												10	-	5300
	30.5L - 32	DH 27	DH 27 B	775	1847	833	5466	SB	20	TL	-	bar	2.40	2.10
												km/h	8400	-
												10	-	6000
	30.5L - 32	DH 27	DH 27 B	775	1847	833	5466	SB	32	TL	-	bar	3.5	3.8
												km/h	-	11500
												10	8000	-
DH 35.5L - 32	DH 31	DH 31 H	907	2011	912	5992	SB	20	TL	-	bar	1.70	2.10	
											km/h	-	10200	
											10	7300	-	
DH 35.5L - 32	DH 31	DH 31 H	907	2011	912	5992	SB	30	TL	-	bar	3.1	3.5	
											km/h	-	13950	
											10	10300	-	
34"	18.4 - 34	DW 16 A	-	467	1679	768	5042	AB	10	TT	-	bar	2.10	1.70
												km/h	4060	-
												10	-	2900
	18.4 - 34	DW 16 A	-	467	1679	768	5042	SB	10	TT	-	bar	2.10	1.70
												km/h	4060	-
												10	-	2900
	18.4 - 34	DW 16 A	-	467	1679	768	5042	AB	14	TL	-	bar	2.80	2.40
												km/h	4875	-
												10	-	3550
	18.4 - 34	DW 16 A	-	467	1679	768	5042	SB	14	TL	-	bar	2.80	2.40
												km/h	4875	-
												10	-	3550

AB: Aramid Belted
SB: Steel Belted



**MAIN APPLICATION:
FORESTRY**



F 240

F 240 is a forestry tire designed for logging applications. Its tread pattern provides excellent traction, self-cleaning properties in addition to good steering. The superior tread compound ensures extraordinary cut-and-wear resistance resulting in a longer service life. F 240 shows a large contact area for better stability.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
15.5" 18 - 15.5	13.00	-	450	990	-	-	STD	14	TT	-	3.50	4185
400 - 15.5	13.00	-	405	865	-	-	STD	12	TT	-	3.80	3150

STD: Standard



TR 678 (LS-2)

TR 678 has been specially designed for forestry applications. Its robust lug design provides excellent traction and self-cleaning. The strong casing structure stands for high load capacity whereas its steel belts protect the tire from punctures and damages. TR 678 features a cut-resistant tread compound providing excellent cut-and-chip resistance even on difficult terrains under extreme conditions.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									↓	
											bar	km/h
34" 600/65 - 34	DW 20 B	-	610	1644	758	4916	SB	14	TL	164 A2/160 A6	2.40	4500
600/65 - 34	DW 20 B	-	610	1644	758	4916	SB	16	TL	166 A2 / 162 A6	2.60	4750
											5300	
600/65 - 34	DW 20 B	-	610	1644	758	4916	SB	20	TL	170 A2 / 166 A6	3.20	5300
											6000	
700/55 - 34	DW 24 B	-	700	1640	757	4890	SB	14	TL	168 A2/163 A6	2.40	4875
											5600	

SB: Steel Belted



MAIN APPLICATION:
MULTIUSE



MULTIMAX MP 513 (R-1)

MULTIMAX MP 513 has been designed by BKT for multi-purpose vehicles in municipality/maintenance applications. Thanks to the strong steel-belted nylon casing, MULTIMAX MP 513 allows to carry heavy loads at high speeds. Its reinforced bead ensures a longer service life and extra mileage to enhance productivity.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)						
		Rec.	Alt.							↓						
17" 425/55 R 17	134 G	13	13.00	421	900	399	2645	-	STD	bar	1.6	2.0	2.5	3.0	3.5	
										km/h						
										90	1080	1280	1550	1830	2120	
										65	1175	1390	1685	1990	2305	
										40	1245	1475	1785	2105	2440	
18" 365/70 R 18	133 G	11	11 SDC; 12; 12 SDC	360	969	448	2933	-	STD	bar	1.6	2.0	2.5	3.0	3.5	3.75
										km/h						
										90	1080	1280	1520	1760	2000	2060
										65	1170	1380	1650	1910	2170	2240
										40	1250	1470	1750	2020	2300	2370
20" 375/70 R 20	136 G	12	W 10; DW 10; 11; 11 SDC; W 11; DW 11; 12 SDC	377	1034	472	3121	-	STD	bar	1.6	2.0	2.5	3.0	3.5	
										km/h						
										90	1210	1435	1705	1975	2240	
										65	1315	1560	1855	2145	2435	
										40	1395	1655	1965	2275	2580	
405/70 R 20	136 G	13	13 SDC; 12 SDC	407	1076	493	3253	-	STD	bar	1.6	2.0	2.5	3.0	3.5	
										km/h						
										90	1340	1580	1820	2040	2240	
										65	1455	1715	1975	2215	2435	
										40	1545	1820	2095	2350	2580	
425/75 R 20	148 G	13	13 SDC; 11 SDC; 12 SDC; 11; 12	421	1146	521	3479	-	STD	bar	1.6	2.0	2.5	3.0	3.5	4.0
										km/h						
										90	1540	1810	2150	2490	2820	3150
										65	1675	1965	2335	2705	3060	3420
										40	1775	2085	2475	2865	3245	3625
24" 495/70 R 24	155 G	W 16 L	DW 15 L; DW 16 L; W 15 L	499	1304	588	3974	-	STD	bar	1.6	2.0	2.5	3.0	3.5	
										km/h						
										90	1980	2340	2840	3250	3875	
										65	2150	2540	3085	3530	4205	
										40	2280	2695	3270	3740	4460	

STD: Standard



MAIN APPLICATION:
MULTIUSE



MULTIMAX MP 522

MULTIMAX MP 522 is the BKT multi-purpose tire developed for manifold agro-industrial applications. It is suitable for all digging and loading operations on vehicles such as telehandlers, compact loaders and backhoe loaders. Stability and high load capacity are its strengths as well as outstanding puncture resistance.

Multimax MP 522 is the right response for all agro-industrial heavy-duty needs.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)																																																																																																	
		Rec.	Alt.																																																																																																								
18" 280/80 R 18	132 A8/B	9; 9 SDC	-	282	907	421	2727	350	STD	<table border="1"> <thead> <tr> <th>bar</th> <th>1.6</th> <th>2.0</th> <th>2.4</th> <th>2.8</th> <th>3.2</th> <th>3.5</th> <th>4.0</th> <th>4.2</th> <th>4.4</th> </tr> </thead> <tbody> <tr> <td>km/h</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>50</td> <td>960</td><td>1140</td><td>1300</td><td>1480</td><td>1660</td><td>1780</td><td>2000</td><td>-</td><td>-</td><td></td> </tr> <tr> <td>40</td> <td>960</td><td>1140</td><td>1300</td><td>1480</td><td>1660</td><td>1780</td><td>2000</td><td>-</td><td>-</td><td></td> </tr> <tr> <td>30</td> <td>1030</td><td>1220</td><td>1395</td><td>1585</td><td>1780</td><td>1905</td><td>2140</td><td>-</td><td>-</td><td></td> </tr> <tr> <td>25</td> <td>1070</td><td>1270</td><td>1445</td><td>1645</td><td>1845</td><td>1980</td><td>2220</td><td>-</td><td>-</td><td></td> </tr> <tr> <td>10 Cyc.</td> <td>1170</td><td>1440</td><td>1695</td><td>1950</td><td>2220</td><td>2415</td><td>2730</td><td>2880</td><td>3000</td><td></td> </tr> <tr> <td>Static</td> <td>1795</td><td>2210</td><td>2600</td><td>2990</td><td>3405</td><td>3705</td><td>4190</td><td>4420</td><td>4600</td><td></td> </tr> </tbody> </table>										bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4	km/h											50	960	1140	1300	1480	1660	1780	2000	-	-		40	960	1140	1300	1480	1660	1780	2000	-	-		30	1030	1220	1395	1585	1780	1905	2140	-	-		25	1070	1270	1445	1645	1845	1980	2220	-	-		10 Cyc.	1170	1440	1695	1950	2220	2415	2730	2880	3000		Static	1795	2210	2600	2990	3405	3705	4190	4420	4600		
										bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4																																																																																								
										km/h																																																																																																	
										50	960	1140	1300	1480	1660	1780	2000	-	-																																																																																								
										40	960	1140	1300	1480	1660	1780	2000	-	-																																																																																								
										30	1030	1220	1395	1585	1780	1905	2140	-	-																																																																																								
										25	1070	1270	1445	1645	1845	1980	2220	-	-																																																																																								
										10 Cyc.	1170	1440	1695	1950	2220	2415	2730	2880	3000																																																																																								
Static	1795	2210	2600	2990	3405	3705	4190	4420	4600																																																																																																		
340/80 R 18 (12.5/80 R 18)	143 A8/B	11; 11 SDC; W 11	W 10; 12; 12 SDC	343	1001	458	3002	475	STD	<table border="1"> <thead> <tr> <th>bar</th> <th>1.6</th> <th>2.0</th> <th>2.4</th> <th>2.8</th> <th>3.2</th> <th>3.5</th> <th>4.0</th> <th>4.2</th> <th>4.4</th> </tr> </thead> <tbody> <tr> <td>km/h</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>50</td> <td>1310</td><td>1555</td><td>1775</td><td>2020</td><td>2265</td><td>2430</td><td>2725</td><td>-</td><td>-</td><td></td> </tr> <tr> <td>40</td> <td>1310</td><td>1555</td><td>1775</td><td>2020</td><td>2265</td><td>2430</td><td>2725</td><td>-</td><td>-</td><td></td> </tr> <tr> <td>30</td> <td>1405</td><td>1665</td><td>1900</td><td>2165</td><td>2425</td><td>2600</td><td>2920</td><td>-</td><td>-</td><td></td> </tr> <tr> <td>25</td> <td>1455</td><td>1725</td><td>1970</td><td>2240</td><td>2515</td><td>2695</td><td>3025</td><td>-</td><td>-</td><td></td> </tr> <tr> <td>10 Cyc.</td> <td>1600</td><td>1965</td><td>2315</td><td>2660</td><td>3030</td><td>3295</td><td>3725</td><td>3930</td><td>4090</td><td></td> </tr> <tr> <td>Static</td> <td>2450</td><td>3010</td><td>3545</td><td>4080</td><td>4640</td><td>5050</td><td>5710</td><td>6020</td><td>6270</td><td></td> </tr> </tbody> </table>										bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4	km/h											50	1310	1555	1775	2020	2265	2430	2725	-	-		40	1310	1555	1775	2020	2265	2430	2725	-	-		30	1405	1665	1900	2165	2425	2600	2920	-	-		25	1455	1725	1970	2240	2515	2695	3025	-	-		10 Cyc.	1600	1965	2315	2660	3030	3295	3725	3930	4090		Static	2450	3010	3545	4080	4640	5050	5710	6020	6270		
										bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4																																																																																								
										km/h																																																																																																	
										50	1310	1555	1775	2020	2265	2430	2725	-	-																																																																																								
										40	1310	1555	1775	2020	2265	2430	2725	-	-																																																																																								
										30	1405	1665	1900	2165	2425	2600	2920	-	-																																																																																								
										25	1455	1725	1970	2240	2515	2695	3025	-	-																																																																																								
										10 Cyc.	1600	1965	2315	2660	3030	3295	3725	3930	4090																																																																																								
Static	2450	3010	3545	4080	4640	5050	5710	6020	6270																																																																																																		
20" 340/80 R 20	144 A8/B	11	W10; 11 SDC; W11; 12; 12 SDC	343	1052	481	3212	500	STD	<table border="1"> <thead> <tr> <th>bar</th> <th>1.6</th> <th>2.0</th> <th>2.4</th> <th>2.8</th> <th>3.2</th> <th>3.5</th> <th>4.0</th> <th>4.2</th> <th>4.4</th> </tr> </thead> <tbody> <tr> <td>km/h</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>50</td> <td>1345</td><td>1600</td><td>1820</td><td>2075</td><td>2325</td><td>2495</td><td>2800</td><td>-</td><td>-</td><td></td> </tr> <tr> <td>40</td> <td>1345</td><td>1600</td><td>1820</td><td>2075</td><td>2325</td><td>2495</td><td>2800</td><td>-</td><td>-</td><td></td> </tr> <tr> <td>30</td> <td>1440</td><td>1710</td><td>1950</td><td>2220</td><td>2490</td><td>2670</td><td>3000</td><td>-</td><td>-</td><td></td> </tr> <tr> <td>25</td> <td>1495</td><td>1775</td><td>2025</td><td>2305</td><td>2585</td><td>2770</td><td>3110</td><td>-</td><td>-</td><td></td> </tr> <tr> <td>10 Cyc.</td> <td>1640</td><td>2020</td><td>2375</td><td>2730</td><td>3110</td><td>3385</td><td>3825</td><td>4035</td><td>4200</td><td></td> </tr> <tr> <td>Static</td> <td>2515</td><td>3095</td><td>3640</td><td>4190</td><td>4770</td><td>5185</td><td>5865</td><td>6185</td><td>6440</td><td></td> </tr> </tbody> </table>										bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4	km/h											50	1345	1600	1820	2075	2325	2495	2800	-	-		40	1345	1600	1820	2075	2325	2495	2800	-	-		30	1440	1710	1950	2220	2490	2670	3000	-	-		25	1495	1775	2025	2305	2585	2770	3110	-	-		10 Cyc.	1640	2020	2375	2730	3110	3385	3825	4035	4200		Static	2515	3095	3640	4190	4770	5185	5865	6185	6440		
										bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4																																																																																								
										km/h																																																																																																	
										50	1345	1600	1820	2075	2325	2495	2800	-	-																																																																																								
										40	1345	1600	1820	2075	2325	2495	2800	-	-																																																																																								
										30	1440	1710	1950	2220	2490	2670	3000	-	-																																																																																								
										25	1495	1775	2025	2305	2585	2770	3110	-	-																																																																																								
										10 Cyc.	1640	2020	2375	2730	3110	3385	3825	4035	4200																																																																																								
Static	2515	3095	3640	4190	4770	5185	5865	6185	6440																																																																																																		
380/75 R 20 (14.5 R 20)	148 A8/B	W 12	W 11; 11; 12	384	1074	483	3251	500	STD	<table border="1"> <thead> <tr> <th>bar</th> <th>1.6</th> <th>2.0</th> <th>2.4</th> <th>2.8</th> <th>3.2</th> <th>3.6</th> <th>3.8</th> <th>4.0</th> <th>4.2</th> <th>4.4</th> </tr> </thead> <tbody> <tr> <td>km/h</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>50</td> <td>1500</td><td>1770</td><td>2040</td><td>2305</td><td>2575</td><td>2860</td><td>3005</td><td>3150</td><td>-</td><td>-</td> </tr> <tr> <td>40</td> <td>1500</td><td>1770</td><td>2040</td><td>2305</td><td>2575</td><td>2860</td><td>3005</td><td>3150</td><td>-</td><td>-</td> </tr> <tr> <td>30</td> <td>1610</td><td>1900</td><td>2195</td><td>2490</td><td>2780</td><td>3075</td><td>3220</td><td>3370</td><td>-</td><td>-</td> </tr> <tr> <td>25</td> <td>1670</td><td>1975</td><td>2280</td><td>2585</td><td>2890</td><td>3195</td><td>3350</td><td>3500</td><td>-</td><td>-</td> </tr> <tr> <td>10 Cyc.</td> <td>1850</td><td>2260</td><td>2670</td><td>3080</td><td>3490</td><td>3900</td><td>4110</td><td>4315</td><td>4520</td><td>4730</td> </tr> <tr> <td>Static</td> <td>2840</td><td>3470</td><td>4100</td><td>4730</td><td>5360</td><td>5990</td><td>6305</td><td>6620</td><td>6935</td><td>7250</td> </tr> </tbody> </table>										bar	1.6	2.0	2.4	2.8	3.2	3.6	3.8	4.0	4.2	4.4	km/h											50	1500	1770	2040	2305	2575	2860	3005	3150	-	-	40	1500	1770	2040	2305	2575	2860	3005	3150	-	-	30	1610	1900	2195	2490	2780	3075	3220	3370	-	-	25	1670	1975	2280	2585	2890	3195	3350	3500	-	-	10 Cyc.	1850	2260	2670	3080	3490	3900	4110	4315	4520	4730	Static	2840	3470	4100	4730	5360	5990	6305	6620	6935	7250
										bar	1.6	2.0	2.4	2.8	3.2	3.6	3.8	4.0	4.2	4.4																																																																																							
										km/h																																																																																																	
										50	1500	1770	2040	2305	2575	2860	3005	3150	-	-																																																																																							
										40	1500	1770	2040	2305	2575	2860	3005	3150	-	-																																																																																							
										30	1610	1900	2195	2490	2780	3075	3220	3370	-	-																																																																																							
										25	1670	1975	2280	2585	2890	3195	3350	3500	-	-																																																																																							
										10 Cyc.	1850	2260	2670	3080	3490	3900	4110	4315	4520	4730																																																																																							
Static	2840	3470	4100	4730	5360	5990	6305	6620	6935	7250																																																																																																	
400/70 R 20 (16.0/70 R 20)	149 A8/B	13	12 SDC; 13 SDC; 14	404	1068	476	3199	525	STD	<table border="1"> <thead> <tr> <th>bar</th> <th>1.6</th> <th>2.0</th> <th>2.4</th> <th>2.8</th> <th>3.2</th> <th>3.5</th> <th>4.0</th> <th>4.2</th> <th>4.4</th> </tr> </thead> <tbody> <tr> <td>km/h</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>50</td> <td>1560</td><td>1855</td><td>2115</td><td>2405</td><td>2700</td><td>2895</td><td>3250</td><td>-</td><td>-</td><td></td> </tr> <tr> <td>40</td> <td>1560</td><td>1855</td><td>2115</td><td>2405</td><td>2700</td><td>2895</td><td>3250</td><td>-</td><td>-</td><td></td> </tr> <tr> <td>30</td> <td>1675</td><td>1985</td><td>2265</td><td>2580</td><td>2890</td><td>3100</td><td>3480</td><td>-</td><td>-</td><td></td> </tr> <tr> <td>25</td> <td>1735</td><td>2060</td><td>2350</td><td>2675</td><td>3000</td><td>3215</td><td>3610</td><td>-</td><td>-</td><td></td> </tr> <tr> <td>10 Cyc.</td> <td>1905</td><td>2340</td><td>2755</td><td>3170</td><td>3610</td><td>3925</td><td>4440</td><td>4680</td><td>4875</td><td></td> </tr> <tr> <td>Static</td> <td>2920</td><td>3590</td><td>4225</td><td>4860</td><td>5535</td><td>6020</td><td>6805</td><td>7180</td><td>7475</td><td></td> </tr> </tbody> </table>										bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4	km/h											50	1560	1855	2115	2405	2700	2895	3250	-	-		40	1560	1855	2115	2405	2700	2895	3250	-	-		30	1675	1985	2265	2580	2890	3100	3480	-	-		25	1735	2060	2350	2675	3000	3215	3610	-	-		10 Cyc.	1905	2340	2755	3170	3610	3925	4440	4680	4875		Static	2920	3590	4225	4860	5535	6020	6805	7180	7475		
										bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4																																																																																								
										km/h																																																																																																	
										50	1560	1855	2115	2405	2700	2895	3250	-	-																																																																																								
										40	1560	1855	2115	2405	2700	2895	3250	-	-																																																																																								
										30	1675	1985	2265	2580	2890	3100	3480	-	-																																																																																								
										25	1735	2060	2350	2675	3000	3215	3610	-	-																																																																																								
										10 Cyc.	1905	2340	2755	3170	3610	3925	4440	4680	4875																																																																																								
Static	2920	3590	4225	4860	5535	6020	6805	7180	7475																																																																																																		

STD: Standard



MAIN APPLICATION:
MULTIUSE



MULTIMAX MP 522

MULTIMAX MP 522 is the BKT multi-purpose tire developed for manifold agro-industrial applications. It is suitable for all digging and loading operations on vehicles such as telehandlers, compact loaders and backhoe loaders. Stability and high load capacity are its strengths as well as outstanding puncture resistance.

Multimax MP 522 is the right response for all agro-industrial heavy-duty needs.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)																						
		Rec.	Alt.							↓																						
24" 400/70 R 24	152 A8/B	13	DW 12; 13 SD; DW 13; DW 13 L; DW 14 L	404	1170	533	3527	575	STD	bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4													
										km/h	1705	2025	2310	2630	2950	3160	3550	-	-													
										50	1705	2025	2310	2630	2950	3160	3550	-	-													
										40	1705	2025	2310	2630	2950	3160	3550	-	-													
										30	1825	2170	2470	2815	3155	3385	3800	-	-													
										25	1895	2250	2565	2920	3275	3515	3945	-	-													
										10 Cyc.	2080	2560	3010	3465	3945	4290	4850	5115	5325													
										Static	3185	3920	4615	5310	6045	6575	7435	7840	8165													
400/80 R 24	162 A8/B	DW 13	DW 12; DW 13 L; DW 14 L	404	1250	553	3778	600	STD	bar	1.6	2.0	2.4	2.8	3.2	3.4	3.6	4.0	4.4	4.6	4.8	5.0	5.2	5.4								
										km/h	1855	2185	2565	2900	3230	3350	3520	3895	4220	4435	4540	4750	-	-								
										50	1855	2185	2565	2900	3230	3350	3520	3895	4220	4435	4540	4750	-	-								
										40	1855	2185	2565	2900	3230	3350	3520	3895	4220	4435	4540	4750	-	-								
										30	1985	2340	2750	3105	3460	3590	3770	4170	4515	4745	4860	5085	-	-								
										25	2060	2430	2850	3220	3590	3725	3910	4330	4690	4925	5040	5275	-	-								
										10 Cyc.	2280	2785	3280	3850	4350	4600	4845	5280	5845	6090	6330	6655	6810	7125								
										Static	3500	4270	5030	5900	6670	7050	7430	8100	8960	9340	9710	10205	10445	10925								
440/80 R 24	161 A8/B	DW 14 L	DW 13; DW 13 L; DW 15 L	441	1314	586	3956	625	STD	bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4													
										km/h	2220	2640	3010	3425	3840	4120	4625	-	-													
										50	2220	2640	3010	3425	3840	4120	4625	-	-													
										40	2220	2640	3010	3425	3840	4120	4625	-	-													
										30	2380	2825	3220	3665	4110	4410	4950	-	-													
										25	2465	2930	3340	3800	4265	4575	5135	-	-													
										10 Cyc.	2710	3335	3925	4515	5140	5590	6320	6665	6940													
										Static	4150	5110	6015	6920	7875	8570	9685	10215	10640													
460/70 R 24 (17.5L R 24)	159 A8/B	DW 15 L	DW 14 L; DW 16 L	465	1250	568	3766	600	STD	bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4													
										km/h	2100	2495	2845	3240	3635	3895	4375	-	-													
										50	2100	2495	2845	3240	3635	3895	4375	-	-													
										40	2100	2495	2845	3240	3635	3895	4375	-	-													
										30	2250	2675	3050	3470	3890	4170	4685	-	-													
										25	2335	2775	3160	3600	4035	4330	4860	-	-													
										10 Cyc.	2565	3155	3710	4270	4860	5285	5975	6305	6565													
										Static	3930	4835	5690	6545	7450	8105	9160	9665	10065													
500/70 R 24 (19.5L R 24)	164 A8/B	DW 16 L	DW 15 L; DW 18 L	503	1310	595	3890	625	STD	bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4													
										km/h	2400	2850	3250	3700	4150	4450	5000	-	-													
										50	2400	2850	3250	3700	4150	4450	5000	-	-													
										40	2400	2850	3250	3700	4150	4450	5000	-	-													
										30	2570	3050	3480	3960	4445	4765	5350	-	-													
										25	2665	3165	3610	4110	4610	4940	5550	-	-													
										10 Cyc.	2925	3600	4240	4875	5550	6040	6825	7200	7500													
										Static	4485	5520	6500	7475	8510	9260	10465	11040	11500													

STD: Standard



MAIN APPLICATION:
MULTIUSE



MULTIMAX MP 522

MULTIMAX MP 522 is the BKT multi-purpose tire developed for manifold agro-industrial applications. It is suitable for all digging and loading operations on vehicles such as telehandlers, compact loaders and backhoe loaders. Stability and high load capacity are its strengths as well as outstanding puncture resistance.

Multimax MP 522 is the right response for all agro-industrial heavy-duty needs.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)																																																																																																										
		Rec.	Alt.																																																																																																																	
24" 540/70 R 24	168 A8/B	DW 16 L	DW 18 L	530	1366	611	4133	650	STD	<table border="1"> <thead> <tr> <th>bar</th> <th>1.6</th> <th>2.0</th> <th>2.4</th> <th>2.8</th> <th>3.2</th> <th>3.5</th> <th>4.0</th> <th>4.2</th> <th>4.4</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>km/h</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>50</td> <td>2690</td><td>3195</td><td>3640</td><td>4145</td><td>4650</td><td>4985</td><td>5600</td><td>-</td><td>-</td><td></td><td></td> </tr> <tr> <td>40</td> <td>2690</td><td>3195</td><td>3640</td><td>4145</td><td>4650</td><td>4985</td><td>5600</td><td>-</td><td>-</td><td></td><td></td> </tr> <tr> <td>30</td> <td>2880</td><td>3420</td><td>3900</td><td>4440</td><td>4980</td><td>5340</td><td>5995</td><td>-</td><td>-</td><td></td><td></td> </tr> <tr> <td>25</td> <td>2990</td><td>3550</td><td>4045</td><td>4605</td><td>5165</td><td>5540</td><td>6220</td><td>-</td><td>-</td><td></td><td></td> </tr> <tr> <td>10 Cyc.</td> <td>3280</td><td>4035</td><td>4750</td><td>5460</td><td>6220</td><td>6765</td><td>7645</td><td>8065</td><td>8400</td><td></td><td></td> </tr> <tr> <td>Static</td> <td>5025</td><td>6185</td><td>7280</td><td>8375</td><td>9535</td><td>10370</td><td>11725</td><td>12365</td><td>12880</td><td></td><td></td> </tr> </tbody> </table>										bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4			km/h													50	2690	3195	3640	4145	4650	4985	5600	-	-			40	2690	3195	3640	4145	4650	4985	5600	-	-			30	2880	3420	3900	4440	4980	5340	5995	-	-			25	2990	3550	4045	4605	5165	5540	6220	-	-			10 Cyc.	3280	4035	4750	5460	6220	6765	7645	8065	8400			Static	5025	6185	7280	8375	9535	10370	11725	12365	12880		
										bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4																																																																																																	
										km/h																																																																																																										
										50	2690	3195	3640	4145	4650	4985	5600	-	-																																																																																																	
										40	2690	3195	3640	4145	4650	4985	5600	-	-																																																																																																	
										30	2880	3420	3900	4440	4980	5340	5995	-	-																																																																																																	
										25	2990	3550	4045	4605	5165	5540	6220	-	-																																																																																																	
										10 Cyc.	3280	4035	4750	5460	6220	6765	7645	8065	8400																																																																																																	
Static	5025	6185	7280	8375	9535	10370	11725	12365	12880																																																																																																											
26" 480/80 R 26	160 A8/B	DW 15 L	DW 16 L	479	1428	638	4287	675	STD	<table border="1"> <thead> <tr> <th>bar</th> <th>1.6</th> <th>2.0</th> <th>2.2</th> <th>2.4</th> <th>2.6</th> <th>2.8</th> <th>3.0</th> <th>3.2</th> <th>3.4</th> <th>3.6</th> </tr> </thead> <tbody> <tr> <td>km/h</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>50</td> <td>2610</td><td>3060</td><td>3330</td><td>3555</td><td>3780</td><td>4005</td><td>4275</td><td>4500</td><td>-</td><td>-</td> </tr> <tr> <td>40</td> <td>2610</td><td>3060</td><td>3330</td><td>3555</td><td>3780</td><td>4005</td><td>4275</td><td>4500</td><td>-</td><td>-</td> </tr> <tr> <td>30</td> <td>2795</td><td>3275</td><td>3565</td><td>3805</td><td>4045</td><td>4290</td><td>4575</td><td>4815</td><td>-</td><td>-</td> </tr> <tr> <td>25</td> <td>2900</td><td>3400</td><td>3700</td><td>3950</td><td>4200</td><td>4450</td><td>4750</td><td>4995</td><td>-</td><td>-</td> </tr> <tr> <td>10 Cyc.</td> <td>3175</td><td>3915</td><td>4255</td><td>4590</td><td>4995</td><td>5335</td><td>5670</td><td>6075</td><td>6415</td><td>6750</td> </tr> <tr> <td>Static</td> <td>4865</td><td>6005</td><td>6525</td><td>7040</td><td>7660</td><td>8180</td><td>8695</td><td>9315</td><td>9835</td><td>10350</td> </tr> </tbody> </table>										bar	1.6	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6	km/h												50	2610	3060	3330	3555	3780	4005	4275	4500	-	-	40	2610	3060	3330	3555	3780	4005	4275	4500	-	-	30	2795	3275	3565	3805	4045	4290	4575	4815	-	-	25	2900	3400	3700	3950	4200	4450	4750	4995	-	-	10 Cyc.	3175	3915	4255	4590	4995	5335	5670	6075	6415	6750	Static	4865	6005	6525	7040	7660	8180	8695	9315	9835	10350								
										bar	1.6	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6																																																																																																
										km/h																																																																																																										
										50	2610	3060	3330	3555	3780	4005	4275	4500	-	-																																																																																																
										40	2610	3060	3330	3555	3780	4005	4275	4500	-	-																																																																																																
										30	2795	3275	3565	3805	4045	4290	4575	4815	-	-																																																																																																
										25	2900	3400	3700	3950	4200	4450	4750	4995	-	-																																																																																																
										10 Cyc.	3175	3915	4255	4590	4995	5335	5670	6075	6415	6750																																																																																																
Static	4865	6005	6525	7040	7660	8180	8695	9315	9835	10350																																																																																																										
28" 440/80 R 28	156 A8/B	DW 14 L	DW 13; DW 13 L; DW 15 L	441	1415	643	4278	675	STD	<table border="1"> <thead> <tr> <th>bar</th> <th>1.6</th> <th>2.0</th> <th>2.2</th> <th>2.4</th> <th>2.6</th> <th>2.8</th> <th>3.0</th> <th>3.2</th> <th>3.4</th> <th>3.6</th> </tr> </thead> <tbody> <tr> <td>km/h</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>50</td> <td>2300</td><td>2725</td><td>2940</td><td>3150</td><td>3360</td><td>3575</td><td>3790</td><td>4000</td><td>-</td><td>-</td> </tr> <tr> <td>40</td> <td>2300</td><td>2725</td><td>2940</td><td>3150</td><td>3360</td><td>3575</td><td>3790</td><td>4000</td><td>-</td><td>-</td> </tr> <tr> <td>30</td> <td>2480</td><td>2930</td><td>3155</td><td>3380</td><td>3605</td><td>3830</td><td>4055</td><td>4280</td><td>-</td><td>-</td> </tr> <tr> <td>25</td> <td>2570</td><td>3040</td><td>3270</td><td>3505</td><td>3740</td><td>3970</td><td>4205</td><td>4440</td><td>-</td><td>-</td> </tr> <tr> <td>10 Cyc.</td> <td>2840</td><td>3470</td><td>3790</td><td>4105</td><td>4420</td><td>4735</td><td>5050</td><td>5370</td><td>5685</td><td>6000</td> </tr> <tr> <td>Static</td> <td>4360</td><td>5330</td><td>5810</td><td>6295</td><td>6780</td><td>7265</td><td>7750</td><td>8230</td><td>8715</td><td>9200</td> </tr> </tbody> </table>										bar	1.6	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6	km/h												50	2300	2725	2940	3150	3360	3575	3790	4000	-	-	40	2300	2725	2940	3150	3360	3575	3790	4000	-	-	30	2480	2930	3155	3380	3605	3830	4055	4280	-	-	25	2570	3040	3270	3505	3740	3970	4205	4440	-	-	10 Cyc.	2840	3470	3790	4105	4420	4735	5050	5370	5685	6000	Static	4360	5330	5810	6295	6780	7265	7750	8230	8715	9200								
										bar	1.6	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6																																																																																																
										km/h																																																																																																										
										50	2300	2725	2940	3150	3360	3575	3790	4000	-	-																																																																																																
										40	2300	2725	2940	3150	3360	3575	3790	4000	-	-																																																																																																
										30	2480	2930	3155	3380	3605	3830	4055	4280	-	-																																																																																																
										25	2570	3040	3270	3505	3740	3970	4205	4440	-	-																																																																																																
										10 Cyc.	2840	3470	3790	4105	4420	4735	5050	5370	5685	6000																																																																																																
Static	4360	5330	5810	6295	6780	7265	7750	8230	8715	9200																																																																																																										

STD: Standard



MAIN APPLICATION:
MULTIUSE



MULTIMAX MP 527

MULTIMAX MP 527 is a multi-purpose radial tire designed for telehandlers in industrial applications. The tire shows an aggressive tread design providing excellent traction under any service condition. The strong sidewall ensures outstanding stability in lift mode. MULTIMAX MP 527 also features a strong puncture-resistant casing and is made of a special cut-and-chip-resistant compound providing extraordinary durability and a long service life.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)																																																																																																																																																	
		Rec.	Alt.																																																																																																																																																								
18" 340/80 R 18	143 A8/B	11; 11 SDC; W 11	W 10; 12; 12 SDC	343	1001	455	2944	475	STD	<table border="1"> <thead> <tr> <th>bar</th> <th>1.6</th> <th>2.0</th> <th>2.4</th> <th>2.8</th> <th>3.2</th> <th>3.5</th> <th>4.0</th> <th>4.2</th> <th>4.4</th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>km/h</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>50</td> <td>1310</td><td>1555</td><td>1775</td><td>2020</td><td>2265</td><td>2430</td><td>2725</td><td>-</td><td>-</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>40</td> <td>1310</td><td>1555</td><td>1775</td><td>2020</td><td>2265</td><td>2430</td><td>2725</td><td>-</td><td>-</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>30</td> <td>1405</td><td>1665</td><td>1900</td><td>2165</td><td>2425</td><td>2600</td><td>2920</td><td>-</td><td>-</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>25</td> <td>1455</td><td>1725</td><td>1970</td><td>2240</td><td>2515</td><td>2695</td><td>3025</td><td>-</td><td>-</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>10 Cyc.</td> <td>1600</td><td>1965</td><td>2315</td><td>2660</td><td>3030</td><td>3295</td><td>3725</td><td>3930</td><td>4090</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>Static</td> <td>2450</td><td>3010</td><td>3545</td><td>4080</td><td>4640</td><td>5050</td><td>5710</td><td>6020</td><td>6270</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> </tbody> </table>											bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4							km/h																	50	1310	1555	1775	2020	2265	2430	2725	-	-								40	1310	1555	1775	2020	2265	2430	2725	-	-								30	1405	1665	1900	2165	2425	2600	2920	-	-								25	1455	1725	1970	2240	2515	2695	3025	-	-								10 Cyc.	1600	1965	2315	2660	3030	3295	3725	3930	4090								Static	2450	3010	3545	4080	4640	5050	5710	6020	6270							
										bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4																																																																																																																																								
										km/h																																																																																																																																																	
										50	1310	1555	1775	2020	2265	2430	2725	-	-																																																																																																																																								
										40	1310	1555	1775	2020	2265	2430	2725	-	-																																																																																																																																								
										30	1405	1665	1900	2165	2425	2600	2920	-	-																																																																																																																																								
										25	1455	1725	1970	2240	2515	2695	3025	-	-																																																																																																																																								
										10 Cyc.	1600	1965	2315	2660	3030	3295	3725	3930	4090																																																																																																																																								
Static	2450	3010	3545	4080	4640	5050	5710	6020	6270																																																																																																																																																		
20" 340/80 R 20	144 A8/B	11	W10; 11 SDC; W11; 12; 12 SDC	343	1052	-	-	500	STD	<table border="1"> <thead> <tr> <th>bar</th> <th>1.6</th> <th>2.0</th> <th>2.4</th> <th>2.8</th> <th>3.2</th> <th>3.5</th> <th>4.0</th> <th>4.2</th> <th>4.4</th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>km/h</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>50</td> <td>1345</td><td>1600</td><td>1820</td><td>2075</td><td>2325</td><td>2495</td><td>2800</td><td>-</td><td>-</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>40</td> <td>1345</td><td>1600</td><td>1820</td><td>2075</td><td>2325</td><td>2495</td><td>2800</td><td>-</td><td>-</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>30</td> <td>1440</td><td>1710</td><td>1950</td><td>2220</td><td>2490</td><td>2670</td><td>3000</td><td>-</td><td>-</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>25</td> <td>1495</td><td>1775</td><td>2025</td><td>2305</td><td>2585</td><td>2770</td><td>3110</td><td>-</td><td>-</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>10 Cyc.</td> <td>1640</td><td>2020</td><td>2375</td><td>2730</td><td>3110</td><td>3385</td><td>3825</td><td>4035</td><td>4200</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>Static</td> <td>2515</td><td>3095</td><td>3640</td><td>4190</td><td>4770</td><td>5185</td><td>5865</td><td>6185</td><td>6440</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> </tbody> </table>											bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4							km/h																	50	1345	1600	1820	2075	2325	2495	2800	-	-								40	1345	1600	1820	2075	2325	2495	2800	-	-								30	1440	1710	1950	2220	2490	2670	3000	-	-								25	1495	1775	2025	2305	2585	2770	3110	-	-								10 Cyc.	1640	2020	2375	2730	3110	3385	3825	4035	4200								Static	2515	3095	3640	4190	4770	5185	5865	6185	6440							
										bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4																																																																																																																																								
										km/h																																																																																																																																																	
										50	1345	1600	1820	2075	2325	2495	2800	-	-																																																																																																																																								
										40	1345	1600	1820	2075	2325	2495	2800	-	-																																																																																																																																								
										30	1440	1710	1950	2220	2490	2670	3000	-	-																																																																																																																																								
										25	1495	1775	2025	2305	2585	2770	3110	-	-																																																																																																																																								
										10 Cyc.	1640	2020	2375	2730	3110	3385	3825	4035	4200																																																																																																																																								
Static	2515	3095	3640	4190	4770	5185	5865	6185	6440																																																																																																																																																		
400/70 R 20 (16.0/70 R 20)	149 A8/B	13	12 SDC; 13 SDC; 14	404	1068	494	3282	525	STD	<table border="1"> <thead> <tr> <th>bar</th> <th>1.6</th> <th>2.0</th> <th>2.4</th> <th>2.8</th> <th>3.2</th> <th>3.5</th> <th>4.0</th> <th>4.2</th> <th>4.4</th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>km/h</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>50</td> <td>1560</td><td>1855</td><td>2115</td><td>2405</td><td>2700</td><td>2895</td><td>3250</td><td>-</td><td>-</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>40</td> <td>1560</td><td>1855</td><td>2115</td><td>2405</td><td>2700</td><td>2895</td><td>3250</td><td>-</td><td>-</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>30</td> <td>1675</td><td>1985</td><td>2265</td><td>2580</td><td>2890</td><td>3100</td><td>3480</td><td>-</td><td>-</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>25</td> <td>1735</td><td>2060</td><td>2350</td><td>2675</td><td>3000</td><td>3215</td><td>3610</td><td>-</td><td>-</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>10 Cyc.</td> <td>1905</td><td>2340</td><td>2755</td><td>3170</td><td>3610</td><td>3925</td><td>4440</td><td>4680</td><td>4875</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>Static</td> <td>2920</td><td>3590</td><td>4225</td><td>4860</td><td>5535</td><td>6020</td><td>6805</td><td>7180</td><td>7475</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> </tbody> </table>											bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4							km/h																	50	1560	1855	2115	2405	2700	2895	3250	-	-								40	1560	1855	2115	2405	2700	2895	3250	-	-								30	1675	1985	2265	2580	2890	3100	3480	-	-								25	1735	2060	2350	2675	3000	3215	3610	-	-								10 Cyc.	1905	2340	2755	3170	3610	3925	4440	4680	4875								Static	2920	3590	4225	4860	5535	6020	6805	7180	7475							
										bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4																																																																																																																																								
										km/h																																																																																																																																																	
										50	1560	1855	2115	2405	2700	2895	3250	-	-																																																																																																																																								
										40	1560	1855	2115	2405	2700	2895	3250	-	-																																																																																																																																								
										30	1675	1985	2265	2580	2890	3100	3480	-	-																																																																																																																																								
										25	1735	2060	2350	2675	3000	3215	3610	-	-																																																																																																																																								
										10 Cyc.	1905	2340	2755	3170	3610	3925	4440	4680	4875																																																																																																																																								
Static	2920	3590	4225	4860	5535	6020	6805	7180	7475																																																																																																																																																		
24" 400/70 R 24	152 A8/B	13	DW 12; DW 13; DW 13 L; 13 SDC; DW 14 L	404	1170	-	-	575	STD	<table border="1"> <thead> <tr> <th>bar</th> <th>1.6</th> <th>2.0</th> <th>2.4</th> <th>2.8</th> <th>3.2</th> <th>3.5</th> <th>4.0</th> <th>4.2</th> <th>4.4</th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>km/h</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>50</td> <td>1705</td><td>2025</td><td>2310</td><td>2630</td><td>2950</td><td>3160</td><td>3550</td><td>-</td><td>-</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>40</td> <td>1705</td><td>2025</td><td>2310</td><td>2630</td><td>2950</td><td>3160</td><td>3550</td><td>-</td><td>-</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>30</td> <td>1825</td><td>2170</td><td>2470</td><td>2815</td><td>3155</td><td>3385</td><td>3800</td><td>-</td><td>-</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>25</td> <td>1895</td><td>2250</td><td>2565</td><td>2920</td><td>3275</td><td>3515</td><td>3945</td><td>-</td><td>-</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>10 Cyc.</td> <td>2080</td><td>2560</td><td>3010</td><td>3465</td><td>3945</td><td>4290</td><td>4850</td><td>5115</td><td>5325</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>Static</td> <td>3185</td><td>3920</td><td>4615</td><td>5310</td><td>6045</td><td>6575</td><td>7435</td><td>7840</td><td>8165</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> </tbody> </table>											bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4							km/h																	50	1705	2025	2310	2630	2950	3160	3550	-	-								40	1705	2025	2310	2630	2950	3160	3550	-	-								30	1825	2170	2470	2815	3155	3385	3800	-	-								25	1895	2250	2565	2920	3275	3515	3945	-	-								10 Cyc.	2080	2560	3010	3465	3945	4290	4850	5115	5325								Static	3185	3920	4615	5310	6045	6575	7435	7840	8165							
										bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4																																																																																																																																								
										km/h																																																																																																																																																	
										50	1705	2025	2310	2630	2950	3160	3550	-	-																																																																																																																																								
										40	1705	2025	2310	2630	2950	3160	3550	-	-																																																																																																																																								
										30	1825	2170	2470	2815	3155	3385	3800	-	-																																																																																																																																								
										25	1895	2250	2565	2920	3275	3515	3945	-	-																																																																																																																																								
										10 Cyc.	2080	2560	3010	3465	3945	4290	4850	5115	5325																																																																																																																																								
Static	3185	3920	4615	5310	6045	6575	7435	7840	8165																																																																																																																																																		
400/80 R 24	162 A8/B	DW 13	DW 12; DW 13 L; DW 14 L	404	1250	578	3834	600	STD	<table border="1"> <thead> <tr> <th>bar</th> <th>1.6</th> <th>2.0</th> <th>2.4</th> <th>2.8</th> <th>3.2</th> <th>3.5</th> <th>4.0</th> <th>4.2</th> <th>4.4</th> <th>4.6</th> <th>4.8</th> <th>5.0</th> <th>5.2</th> <th>5.4</th> </tr> </thead> <tbody> <tr> <td>km/h</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>50</td> <td>1855</td><td>2185</td><td>2565</td><td>2900</td><td>3230</td><td>3350</td><td>3520</td><td>3895</td><td>4220</td><td>4435</td><td>4540</td><td>4750</td><td>-</td><td>-</td> </tr> <tr> <td>40</td> <td>1855</td><td>2185</td><td>2565</td><td>2900</td><td>3230</td><td>3350</td><td>3520</td><td>3895</td><td>4220</td><td>4435</td><td>4540</td><td>4750</td><td>-</td><td>-</td> </tr> <tr> <td>30</td> <td>1985</td><td>2340</td><td>2750</td><td>3105</td><td>3460</td><td>3590</td><td>3770</td><td>4170</td><td>4515</td><td>4745</td><td>4860</td><td>5085</td><td>-</td><td>-</td> </tr> <tr> <td>25</td> <td>2060</td><td>2430</td><td>2850</td><td>3220</td><td>3590</td><td>3725</td><td>3910</td><td>4330</td><td>4690</td><td>4925</td><td>5040</td><td>5275</td><td>-</td><td>-</td> </tr> <tr> <td>10 Cyc.</td> <td>2280</td><td>2785</td><td>3280</td><td>3850</td><td>4350</td><td>4600</td><td>4845</td><td>5280</td><td>5845</td><td>6090</td><td>6330</td><td>6655</td><td>6810</td><td>7125</td> </tr> <tr> <td>Static</td> <td>3500</td><td>4270</td><td>5030</td><td>5900</td><td>6670</td><td>7050</td><td>7430</td><td>8100</td><td>8960</td><td>9340</td><td>9710</td><td>10205</td><td>10445</td><td>10925</td> </tr> </tbody> </table>											bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4	4.6	4.8	5.0	5.2	5.4	km/h															50	1855	2185	2565	2900	3230	3350	3520	3895	4220	4435	4540	4750	-	-	40	1855	2185	2565	2900	3230	3350	3520	3895	4220	4435	4540	4750	-	-	30	1985	2340	2750	3105	3460	3590	3770	4170	4515	4745	4860	5085	-	-	25	2060	2430	2850	3220	3590	3725	3910	4330	4690	4925	5040	5275	-	-	10 Cyc.	2280	2785	3280	3850	4350	4600	4845	5280	5845	6090	6330	6655	6810	7125	Static	3500	4270	5030	5900	6670	7050	7430	8100	8960	9340	9710	10205	10445	10925															
										bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4	4.6	4.8	5.0	5.2	5.4																																																																																																																																			
										km/h																																																																																																																																																	
										50	1855	2185	2565	2900	3230	3350	3520	3895	4220	4435	4540	4750	-	-																																																																																																																																			
										40	1855	2185	2565	2900	3230	3350	3520	3895	4220	4435	4540	4750	-	-																																																																																																																																			
										30	1985	2340	2750	3105	3460	3590	3770	4170	4515	4745	4860	5085	-	-																																																																																																																																			
										25	2060	2430	2850	3220	3590	3725	3910	4330	4690	4925	5040	5275	-	-																																																																																																																																			
										10 Cyc.	2280	2785	3280	3850	4350	4600	4845	5280	5845	6090	6330	6655	6810	7125																																																																																																																																			
Static	3500	4270	5030	5900	6670	7050	7430	8100	8960	9340	9710	10205	10445	10925																																																																																																																																													

STD: Standard



MAIN APPLICATION:
MULTIUSE



MULTIMAX MP 527

MULTIMAX MP 527 is a multi-purpose radial tire designed for telehandlers in industrial applications. The tire shows an aggressive tread design providing excellent traction under any service condition. The strong sidewall ensures outstanding stability in lift mode. MULTIMAX MP 527 also features a strong puncture-resistant casing and is made of a special cut-and-chip-resistant compound providing extraordinary durability and a long service life.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)																																																																																																									
		Rec.	Alt.																																																																																																																
24" 440/80 R 24	161 A8/B	DW 14 L	DW 13; DW 13 L; DW 15 L	441	1314	601	3985	625	STD	<table border="1"> <thead> <tr> <th>bar</th> <th>1.6</th> <th>2.0</th> <th>2.4</th> <th>2.8</th> <th>3.2</th> <th>3.5</th> <th>4.0</th> <th>4.2</th> <th>4.4</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>km/h</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>50</td> <td>2220</td><td>2640</td><td>3010</td><td>3425</td><td>3840</td><td>4120</td><td>4625</td><td>-</td><td>-</td><td></td><td></td> </tr> <tr> <td>40</td> <td>2220</td><td>2640</td><td>3010</td><td>3425</td><td>3840</td><td>4120</td><td>4625</td><td>-</td><td>-</td><td></td><td></td> </tr> <tr> <td>30</td> <td>2380</td><td>2825</td><td>3220</td><td>3665</td><td>4110</td><td>4410</td><td>4950</td><td>-</td><td>-</td><td></td><td></td> </tr> <tr> <td>25</td> <td>2465</td><td>2930</td><td>3340</td><td>3800</td><td>4265</td><td>4575</td><td>5135</td><td>-</td><td>-</td><td></td><td></td> </tr> <tr> <td>10 Cyc.</td> <td>2710</td><td>3335</td><td>3925</td><td>4515</td><td>5140</td><td>5590</td><td>6320</td><td>6665</td><td>6940</td><td></td><td></td> </tr> <tr> <td>Static</td> <td>4150</td><td>5110</td><td>6015</td><td>6920</td><td>7875</td><td>8570</td><td>9685</td><td>10215</td><td>10640</td><td></td><td></td> </tr> </tbody> </table>										bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4			km/h												50	2220	2640	3010	3425	3840	4120	4625	-	-			40	2220	2640	3010	3425	3840	4120	4625	-	-			30	2380	2825	3220	3665	4110	4410	4950	-	-			25	2465	2930	3340	3800	4265	4575	5135	-	-			10 Cyc.	2710	3335	3925	4515	5140	5590	6320	6665	6940			Static	4150	5110	6015	6920	7875	8570	9685	10215	10640		
										bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4																																																																																																
										km/h																																																																																																									
										50	2220	2640	3010	3425	3840	4120	4625	-	-																																																																																																
										40	2220	2640	3010	3425	3840	4120	4625	-	-																																																																																																
										30	2380	2825	3220	3665	4110	4410	4950	-	-																																																																																																
										25	2465	2930	3340	3800	4265	4575	5135	-	-																																																																																																
										10 Cyc.	2710	3335	3925	4515	5140	5590	6320	6665	6940																																																																																																
										Static	4150	5110	6015	6920	7875	8570	9685	10215	10640																																																																																																
										460/70 R 24 (17.5L R 24)	159 A8/B	DW 15 L	DW 14 L; DW 16 L	465	1254	574	3801	600	STD	<table border="1"> <thead> <tr> <th>bar</th> <th>1.6</th> <th>2.0</th> <th>2.4</th> <th>2.8</th> <th>3.2</th> <th>3.5</th> <th>4.0</th> <th>4.2</th> <th>4.4</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>km/h</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>50</td> <td>2100</td><td>2495</td><td>2845</td><td>3240</td><td>3635</td><td>3895</td><td>4375</td><td>-</td><td>-</td><td></td><td></td> </tr> <tr> <td>40</td> <td>2100</td><td>2495</td><td>2845</td><td>3240</td><td>3635</td><td>3895</td><td>4375</td><td>-</td><td>-</td><td></td><td></td> </tr> <tr> <td>30</td> <td>2250</td><td>2675</td><td>3050</td><td>3470</td><td>3890</td><td>4170</td><td>4685</td><td>-</td><td>-</td><td></td><td></td> </tr> <tr> <td>25</td> <td>2335</td><td>2775</td><td>3160</td><td>3600</td><td>4035</td><td>4330</td><td>4860</td><td>-</td><td>-</td><td></td><td></td> </tr> <tr> <td>10 Cyc.</td> <td>2565</td><td>3155</td><td>3710</td><td>4270</td><td>4860</td><td>5285</td><td>5975</td><td>6305</td><td>6565</td><td></td><td></td> </tr> <tr> <td>Static</td> <td>3930</td><td>4835</td><td>5690</td><td>6545</td><td>7450</td><td>8105</td><td>9160</td><td>9665</td><td>10065</td><td></td><td></td> </tr> </tbody> </table>										bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4			km/h												50	2100	2495	2845	3240	3635	3895	4375	-	-			40	2100	2495	2845	3240	3635	3895	4375	-	-			30	2250	2675	3050	3470	3890	4170	4685	-	-			25	2335	2775	3160	3600	4035	4330	4860	-	-			10 Cyc.	2565	3155	3710	4270	4860	5285	5975	6305	6565			Static	3930
bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4																																																																																																										
km/h																																																																																																																			
50	2100	2495	2845	3240	3635	3895	4375	-	-																																																																																																										
40	2100	2495	2845	3240	3635	3895	4375	-	-																																																																																																										
30	2250	2675	3050	3470	3890	4170	4685	-	-																																																																																																										
25	2335	2775	3160	3600	4035	4330	4860	-	-																																																																																																										
10 Cyc.	2565	3155	3710	4270	4860	5285	5975	6305	6565																																																																																																										
Static	3930	4835	5690	6545	7450	8105	9160	9665	10065																																																																																																										
500/70 R 24	164 A8/B	DW 16 L	DW 15 L; DW 18 L	503	1310	597	4019	625	STD											<table border="1"> <thead> <tr> <th>bar</th> <th>1.6</th> <th>2.0</th> <th>2.4</th> <th>2.8</th> <th>3.2</th> <th>3.5</th> <th>4.0</th> <th>4.2</th> <th>4.4</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>km/h</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>50</td> <td>2400</td><td>2850</td><td>3250</td><td>3700</td><td>4150</td><td>4450</td><td>5000</td><td>-</td><td>-</td><td></td><td></td> </tr> <tr> <td>40</td> <td>2400</td><td>2850</td><td>3250</td><td>3700</td><td>4150</td><td>4450</td><td>5000</td><td>-</td><td>-</td><td></td><td></td> </tr> <tr> <td>30</td> <td>2570</td><td>3050</td><td>3480</td><td>3960</td><td>4445</td><td>4765</td><td>5350</td><td>-</td><td>-</td><td></td><td></td> </tr> <tr> <td>25</td> <td>2665</td><td>3165</td><td>3610</td><td>4110</td><td>4610</td><td>4940</td><td>5550</td><td>-</td><td>-</td><td></td><td></td> </tr> <tr> <td>10 Cyc.</td> <td>2925</td><td>3600</td><td>4240</td><td>4875</td><td>5550</td><td>6040</td><td>6825</td><td>7200</td><td>7500</td><td></td><td></td> </tr> <tr> <td>Static</td> <td>4485</td><td>5520</td><td>6500</td><td>7475</td><td>8510</td><td>9260</td><td>10465</td><td>11040</td><td>11500</td><td></td><td></td> </tr> </tbody> </table>										bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4			km/h												50	2400	2850	3250	3700	4150	4450	5000	-	-			40	2400	2850	3250	3700	4150	4450	5000	-	-			30	2570	3050	3480	3960	4445	4765	5350	-	-			25	2665	3165	3610	4110	4610	4940	5550	-	-			10 Cyc.	2925	3600	4240	4875	5550	6040	6825	7200	7500			Static	4485
										bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4																																																																																																
										km/h																																																																																																									
										50	2400	2850	3250	3700	4150	4450	5000	-	-																																																																																																
										40	2400	2850	3250	3700	4150	4450	5000	-	-																																																																																																
										30	2570	3050	3480	3960	4445	4765	5350	-	-																																																																																																
										25	2665	3165	3610	4110	4610	4940	5550	-	-																																																																																																
										10 Cyc.	2925	3600	4240	4875	5550	6040	6825	7200	7500																																																																																																
										Static	4485	5520	6500	7475	8510	9260	10465	11040	11500																																																																																																
										28" 440/80 R 28	156 A8/B	DW 14 L	DW 13; DW 13 L; DW 15 L	441	1415	648	4270	675	STD	<table border="1"> <thead> <tr> <th>bar</th> <th>1.6</th> <th>2.0</th> <th>2.2</th> <th>2.4</th> <th>2.6</th> <th>2.8</th> <th>3.0</th> <th>3.2</th> <th>3.4</th> <th>3.6</th> </tr> </thead> <tbody> <tr> <td>km/h</td> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td> </tr> <tr> <td>50</td> <td>2300</td><td>2725</td><td>2940</td><td>3150</td><td>3360</td><td>3575</td><td>3790</td><td>4000</td><td>-</td><td>-</td> </tr> <tr> <td>40</td> <td>2300</td><td>2725</td><td>2940</td><td>3150</td><td>3360</td><td>3575</td><td>3790</td><td>4000</td><td>-</td><td>-</td> </tr> <tr> <td>30</td> <td>2480</td><td>2930</td><td>3155</td><td>3380</td><td>3605</td><td>3830</td><td>4055</td><td>4280</td><td>-</td><td>-</td> </tr> <tr> <td>25</td> <td>2570</td><td>3040</td><td>3270</td><td>3505</td><td>3740</td><td>3970</td><td>4205</td><td>4440</td><td>-</td><td>-</td> </tr> <tr> <td>10 Cyc.</td> <td>2840</td><td>3470</td><td>3790</td><td>4105</td><td>4420</td><td>4735</td><td>5050</td><td>5370</td><td>5685</td><td>6000</td> </tr> <tr> <td>Static</td> <td>4360</td><td>5330</td><td>5810</td><td>6295</td><td>6780</td><td>7265</td><td>7750</td><td>8230</td><td>8715</td><td>9200</td> </tr> </tbody> </table>										bar	1.6	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6	km/h											50	2300	2725	2940	3150	3360	3575	3790	4000	-	-	40	2300	2725	2940	3150	3360	3575	3790	4000	-	-	30	2480	2930	3155	3380	3605	3830	4055	4280	-	-	25	2570	3040	3270	3505	3740	3970	4205	4440	-	-	10 Cyc.	2840	3470	3790	4105	4420	4735	5050	5370	5685	6000	Static	4360	5330	5810	6295	6780	7265	7750	8230
bar	1.6	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4											3.6																																																																																															
km/h																																																																																																																			
50	2300	2725	2940	3150	3360	3575	3790	4000	-											-																																																																																															
40	2300	2725	2940	3150	3360	3575	3790	4000	-											-																																																																																															
30	2480	2930	3155	3380	3605	3830	4055	4280	-											-																																																																																															
25	2570	3040	3270	3505	3740	3970	4205	4440	-											-																																																																																															
10 Cyc.	2840	3470	3790	4105	4420	4735	5050	5370	5685											6000																																																																																															
Static	4360	5330	5810	6295	6780	7265	7750	8230	8715											9200																																																																																															

STD: Standard



MAIN APPLICATION:
MULTIUSE



MULTIMAX MP 540

MULTIMAX MP 540 has been designed by BKT for multi-purpose vehicles in municipality/maintenance applications. Thanks to the strong steel-belted nylon casing, MULTIMAX MP 540 allows to carry heavy loads at high speeds.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)							
		Rec.	Alt.							↓							
											bar	4.0	4.5	5.0	5.5	6.0	6.5
20"											km/h						
335/80 R 20	149 K	11	-	340	1044	492	3258	-	STD		110	2205	2420	2635	2845	3050	3250
											100	2205	2420	2635	2845	3050	3250
											90	2250	2470	2685	2900	3110	3315
											80	2290	2520	2740	2955	3170	3380
											70	2360	2595	2820	3045	3265	3480

STD: Standard



MAIN APPLICATION:
MULTIUSE



RT 747 AGRO INDUSTRIAL

RT 747 AGRO INDUSTRIAL is a radial agro-industrial tire suitable for backhoe loaders, compact loaders and telehandlers. Its extra wide lugs provide excellent grip and great stability in lift operations. RT 747 AGRO INDUSTRIAL is the right answer to all general farming operations that need outstanding versatility.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)							
		Rec.	Alt.							↓							
24" 460/70 R 24 (17.5L R 24)	152 A8/149 B	DW 15 L	DW 14 L; DW 16 L	465	1254	556	3840	575	STD	bar	1.2	1.6	2.0	2.4	2.8	3.2	
										km/h	50	1530	1885	2210	2570	2985	3250
										40	1670	2060	2415	2805	3160	3550	
										30	1785	2205	2585	3000	3380	3800	
										25	1850	2285	2680	3115	3505	3940	
										10 Cyc	2505	3090	3620	4205	4740	5325	
										Static	3505	4325	5070	5890	6635	7455	
										bar	1.2	1.6	2.0	2.4	2.8	3.0	
500/70 R 24 (19.5L R 24)	157 A8/154 B	DW 16 L	DW 15 L; DW 18 L	485	1320	585	3949	625	STD	bar	1.2	1.6	2.0	2.4	2.8	3.0	
										km/h	50	1765	2175	2550	2965	3340	3750
										40	1940	2395	2805	3260	3670	4125	
										30	2075	2560	3000	3490	3930	4415	
										25	2155	2655	3115	3620	4075	4580	
										10 Cyc	2910	3590	4210	4890	5510	6190	
										Static	4075	5025	5890	6845	7710	8665	

STD: Standard



MAIN APPLICATION:
MULTIUSE



CON STAR

CON STAR is particularly suitable for backhoe loaders, compact loaders and telehandlers in digging and loading applications. It features high load capacity along with excellent vertical and horizontal stability. CON STAR has been made of a cut-and-chip-resistant compound contributing to an extended tire life-cycle.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									bar	km/h
18" 340/80 - 18 (12.5/80 - 18)	11	12; 11 SDC; 12 SDC; W 10; W 11	350	1015	460	3075	IND	-	TL	143 A8	4.00	2725
20" 340/80 - 20 (12.5/80 - 20)	11	12; 11 SDC; 12 SDC; W 10; W 11	350	1065	491	3272	IND	-	TL	144 A8	4.00	2800
380/75 - 20 (14.5 - 20)	W 12	W 11; 12 SDC; 12; W 13; 13 SDC; 13	385	1080	500	3273	IND	-	TL	148 A8	4.00	3150
400/70 - 20 (16.0/70 - 20)	13	12 SDC; 13 SDC; 14	405	1080	501	3303	IND	-	TL	156 A8	5.00	4000
400/70 - 20 (16.0/70 - 20)	13	12 SDC; 13 SDC; 14	405	1080	501	3303	IND	16	TL	149 A8	4.00	3250
24" 400/70 - 24 (16.0/70 - 24)	13	DW 12; 13 SDC; DW 13; DW 13 L; DW 14 L	395	1175	-	-	IND	-	TL	158 A8	5.00	4250
400/80 - 24 (15.5/80 - 24)	DW 13	DW 1; DW 13 L; DW 14 L	405	1250	570	3781	IND	20	TL	162 A8	5.00	4750
440/80 - 24 (17.0/80 - 24)	DW 14 L	DW 13; DW 13 L; DW 15 L	455	1315	610	3986	IND	22	TL	168 A8	5.00	5600
460/70 - 24 (17.5L - 24)	DW 15 L	DW 14 L; DW 16 L	460	1250	-	-	IND	-	TL	159 A8	4.00	4375
500/70 - 24 (19.5L - 24)	DW 16 L	DW 15 L; DW 18 L	505	1300	579	3926	IND	-	TL	164 A8	4.00	5000
26" 480/80 - 26 (18.4 - 26)	DW 15 L	DW 16 L	490	1410	643	4272	IND	-	TL	160 A8	3.20	4500
28" 440/80 - 28 (16.9 - 28)	DW 14 L	DW 13; DW 13 L; DW 15 L	450	1420	632	4299	IND	-	TL	156 A8	3.20	4000

IND: Industrial



MAIN APPLICATION:
MULTIUSE



AT 603

AT 603 is a bias agro-industrial tire for backhoe loaders, compact loaders and compact dumpers in digging and loading applications. AT 603 has been engineered to ensure great traction on drive wheels providing the best performance on and off the road. The AT 603 "special" version offers improved cut and chip resistance while the "HD" version is ideal for heavy-duty service.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.											↓	
18" 10.5/80 - 18	W 9	W 8; 9	274	907	405	2657	STD	10	TL	-	131 A8	119 A8	bar	3.70
													km/h	
													10 FR	2730
													25 FR	2320
													30 FR	2185
													40 FR	1950
													10 DW	1905
													25 DW	1620
													30 DW	1525
													40 DW	1360
10.5/80 - 18	W 9	W 8; 9	274	907	405	2657	HD	10	TL	-	131 A8	119 A8	bar	3.70
													km/h	
													10 FR	2730
													25 FR	2320
													30 FR	2185
													40 FR	1950
													10 DW	1905
													25 DW	1620
													30 DW	1525
													40 DW	1360
10.5/80 - 18	W 9	W 8; 9	274	907	405	2657	SPL	10	TL	-	131 A8	119 A8	bar	3.70
													km/h	
													10 FR	2730
													25 FR	2320
													30 FR	2185
													40 FR	1950
													10 DW	1905
													25 DW	1620
													30 DW	1525
													40 DW	1360

HD: Heavy Duty
SPL: Special
STD: Standard



MAIN APPLICATION:
MULTIUSE



AT 603

AT 603 is a bias agro-industrial tire for backhoe loaders, compact loaders and compact dumpers in digging and loading applications. AT 603 has been engineered to ensure great traction on drive wheels providing the best performance on and off the road. The AT 603 "special" version offers improved cut and chip resistance while the "HD" version is ideal for heavy-duty service.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.											↓	
18" 12.5/80 - 18	W 9	11	308	987	438	2892	STD	12	TL	-	142 A8	129 A8	bar	3.70
													km/h	
													10 FR	3710
													25 FR	3155
													30 FR	2970
													40 FR	2650
													10 DW	2590
													25 DW	2200
													30 DW	2070
													40 DW	1850
12.5/80 - 18	W 9	11	308	987	438	2892	SPL	12	TL	-	142 A8	129 A8	bar	3.70
													km/h	
													10 FR	3710
													25 FR	3155
													30 FR	2970
													40 FR	2650
													10 DW	2590
													25 DW	2200
													30 DW	2070
													40 DW	1850

SPL: Special
STD: Standard



MAIN APPLICATION:
MULTIUSE



AT 603

AT 603 is a bias agro-industrial tire for backhoe loaders, compact loaders and compact dumpers in digging and loading applications. AT 603 has been engineered to ensure great traction on drive wheels providing the best performance on and off the road. The AT 603 "special" version offers improved cut and chip resistance while the "HD" version is ideal for heavy-duty service.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.											↓	
18" 12.5/80 - 18	W 9	11	308	987	438	2892	SPL	12	TL	-	142 A8	129 A8	bar	3.70
													km/h	
													10 FR	3710
													25 FR	3155
													30 FR	2970
													40 FR	2650
													10 DW	2590
													25 DW	2200
													30 DW	2070
													40 DW	1850
12.5/80 - 18	W 9	11	308	987	438	2892	STD	16	TL	-	148 A8	135 A8	bar	4.90
													km/h	
													10 FR	4410
													25 FR	3750
													30 FR	3530
													40 FR	3150
													10 DW	3050
													25 DW	2595
													30 DW	2440
													40 DW	2180
12.5/80 - 18	W 9	11	308	987	438	2892	STD	18	TL	-	150 A8	138 A8	bar	5.50
													km/h	
													10 FR	4690
													25 FR	3985
													30 FR	3750
													40 FR	3350
													10 DW	3305
													25 DW	2810
													30 DW	2645
													40 DW	2360

SPL: Special
STD: Standard



**MAIN APPLICATION:
MULTIUSE**



AT 621 (R-4)

AT 621 is suitable for backhoe loaders and compact loaders in all farming digging and loading operations. The AT 621 tire features an extra deep tread which ensures great cut resistance and higher durability. AT 621 is available in several versions to meet the most differing user requirements.



TRACTION CUT RESISTANT DURABILITY

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.											bar	km/h
15" 33 X 12.5 - 15	10.00 F SDC	-	318	851	385	2493	STD	8	TT	-	-	-	bar	3.25
													km/h	2130
													10	
16" 9.00 - 16	6.50 H	6.00 G	260	925	-	-	IND	16	TT	137 A6	-	-	bar	7.25
													km/h	2300
													30	
12.5/70 - 16	10 LB	-	315	855	385	2584	STD	8	TL	-	-	-	bar	2.60
													km/h	1645
													10	
18" 12.5/80 - 18	W 9	11.0	308	987	438	2892	STD	12	TT	-	142 A8	129 A8	bar	3.70
													km/h	
													10 FR	3710
													25 FR	3155
													30 FR	2970
													40 FR	2650
													10 DW	2590
													25 DW	2200
													30 DW	2070
40 DW	1850													
12.5/80 - 18	W 9	11.0	308	987	438	2892	STD	12	TL	-	142 A8	129 A8	bar	3.70
													km/h	
													10 FR	3710
													25 FR	3155
													30 FR	2970
													40 FR	2650
													10 DW	2590
													25 DW	2200
													30 DW	2070
40 DW	1850													

STD: Standard
IND: Industrial



MAIN APPLICATION:
MULTIUSE



AT 621 (R-4)

AT 621 is suitable for backhoe loaders and compact loaders in all farming digging and loading operations. The AT 621 tire features an extra deep tread which ensures great cut resistance and higher durability. AT 621 is available in several versions to meet the most differing user requirements.



TRACTION CUT RESISTANT DURABILITY

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.											↓	
12.5/80 - 18	W 9	11	308	987	438	2892	SPL	12	TL	-	142 A8	129 A8	bar	3.70
													km/h	
													10 FR	3710
													25 FR	3155
													30 FR	2970
													40 FR	2650
													10 DW	2590
													25 DW	2200
													30 DW	2070
													40 DW	1850
12.5/80 - 18	W 9	11.0	308	987	438	2892	STD	16	TT	-	148 A8	135 A8	bar	4.90
													km/h	
													10 FR	4410
													25 FR	3750
													30 FR	3530
													40 FR	3150
													10 DW	3050
													25 DW	2595
													30 DW	2440
													40 DW	2180
12.5/80 - 18	W 9	11.0	308	987	465	2928	IND HD	16	TL	-	148 A8	135 A8	bar	4.90
													km/h	
													10 FR	4410
													25 FR	3750
													30 FR	3530
													40 FR	3150
													10 DW	3050
													25 DW	2595
													30 DW	2440
													40 DW	2180

STD: Standard
SPL: Special
IND HD: Industrial Heavy Duty



MAIN APPLICATION:
MULTIUSE



AT 621 (R-4)

AT 621 is suitable for backhoe loaders and compact loaders in all farming digging and loading operations. The AT 621 tire features an extra deep tread which ensures great cut resistance and higher durability. AT 621 is available in several versions to meet the most differing user requirements.



TRACTION

CUT RESISTANT

DURABILITY

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.											bar	km/h
18" 15.5/60 - 18	W 13	-	400	950	428	2871	STD	10	TL	-	-	-	bar	2.60
													km/h	2400
													10	2400
15.5/70 - 18 (400/70 - 18)	W 13	-	400	1030	474	3111	STD	10	TL	-	-	-	bar	2.60
													km/h	2700
													10	2700
20" 17.5/65 - 20	W 14 L	-	450	1090	490	3294	STD	10	TL	-	-	-	bar	2.40
													km/h	3195
													10	3195
42 X 17 - 20	14.00TG SDC	-	432	1073	480	3198	STD	10	TT	-	-	-	bar	3.00
													km/h	3690
													10	3690
400/70 - 20	13	12 SDC; 13 SDC; 14	405	1090	-	-	STD	-	TL	149 A8	-	-	bar	4.00
													km/h	3250
													40	3250
24" 16.9 - 24	DW 15 L	DW 14 L	450	1302	582	3776	IND	12	TL	149 A8	-	-	bar	2.60
													km/h	3250
													40	3250
17.5L - 24	DW 15 L	DW 14 L	450	1255	563	3640	STD	8	TL	139 A8	-	-	bar	1.70
													km/h	2430
													40	2430
19.5L - 24	DW 16 L	-	482	1305	587	3936	STD	12	TL	151 A8	-	-	bar	2.30
													km/h	3450
													40	3450
26" 18.4 - 26	DW 16 L	DW 15 L	480	1425	636	4133	STD	12	TL	156 A8	-	-	bar	2.50
													km/h	4000
													40	4000
28" 16.9 - 28	DW 15 L	DW 14 L	450	1410	645	4247	IND	12	TT	152 A8	-	-	bar	2.60
													km/h	3550
													40	3550
16.9 - 28	DW 15 L	DW 14 L	450	1410	645	4247	IND	12	TL	152 A8	-	-	bar	2.60
													km/h	3550
													40	3550
30" 16.9 - 30	DW 15 L	DW 14 L	450	1460	670	4398	IND	12	TL	153 A8	-	-	bar	2.60
													km/h	3650
													40	3650

STD: Standard
IND: Industrial



MAIN APPLICATION:
MULTIUSE



MP 567

MP 567 is an agro-industrial tire suitable for field and road transport, municipality/maintenance operations as well as soil tillage applications depending on the tire size. The MP 567 tire provides good traction in all the weather conditions as well as excellent self-cleaning properties.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									bar	km/h	
15"	11.5/80 - 15	8 LB	290	875	-	-	STD	12	TL	-	bar	4.10	
											30	2440	
											40	2180	
15.3"	10.0/75 - 15.3	9.0	258	774	355	2310	STD	10	TL	-	bar	3.90	
											30	1735	
											40	1550	
	10.0/75 - 15.3	9.0	258	774	355	2310	STD	12	TL	-	bar	4.70	
											30	1905	
											40	1700	
	10.0/75 - 15.3	9.0	258	774	355	2310	STD	14	TL	-	bar	5.50	
											30	2130	
											40	1900	
	10.0/75 - 15.3	9.0	258	774	355	2310	STD	18	TL	-	bar	7.10	
											30	2440	
											40	2180	
11.5/80 - 15.3	9.0	292	868	393	2578	STD	10	TL	-	bar	3.40		
										30	2185		
										40	1950		
11.5/80 - 15.3	9.0	292	868	393	2578	STD	14	TL	-	bar	4.75		
										30	2720		
										40	2430		
11.5/80 - 15.3	9.0	292	868	393	2578	STD	18	TL	-	bar	6.00		
										30	3050		
										40	2725		
18"	10.5 - 18	9	270	905	415	2700	STD	10	TT	-	bar	3.75	
											90	1700	
											40	1955	
	10.5 - 18	9	9 SDC	270	905	415	2700	STD	10	TL	-	bar	3.75
												90	1700
												40	1955
	10.5 - 18	9	9 SDC	270	905	415	2700	STD	12	TL	-	bar	4.50
												90	1900
												40	2190
	12.5 - 18	11	12 SDC	325	990	450	2940	STD	10	TT	-	bar	3.00
												90	1800
												40	2070

STD: Standard



**MAIN APPLICATION:
MULTIUSE**



MP 567

MP 567 is an agro-industrial tire suitable for field and road transport, municipality/maintenance operations as well as soil tillage applications depending on the tire size. The MP 567 tire provides good traction in all the weather conditions as well as excellent self-cleaning properties.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									bar	km/h
18"												
12.5 - 18	11	12 SDC	325	990	450	2940	STD	10	TL	-	bar	3.00
											km/h	1800
											40	2070
12.5 - 18	11	12 SDC	325	990	450	2940	STD	12	TT	-	bar	3.50
											km/h	1950
											40	2245
12.5 - 18	11	12 SDC	325	990	450	2940	STD	12	TL	-	bar	3.50
											km/h	1950
											40	2245
12.5 - 18	11	12 SDC	325	990	450	2940	STD	16	TL	-	bar	4.50
											km/h	2250
											40	2585
19.5"												
18 - 19.5	14.00	-	460	1104	498	3280	STD	14	TL	-	bar	4.75
											km/h	3925
											40	4150
18 - 19.5	14.00	-	460	1104	498	3280	STD	16	TL	-	bar	6.00
											km/h	4500
											40	4700
18 - 19.5	14.00	-	460	1104	498	3280	STD	18	TL	-	bar	7.25
											km/h	5150
											40	5460
20"												
10.5 - 20	9	9 SDC	270	955	445	2880	STD	10	TT	-	bar	3.75
											km/h	1800
											40	2070
10.5 - 20	9	9 SDC	270	955	445	2880	STD	10	TL	-	bar	3.75
											km/h	1800
											40	2070
12.5 - 20	11.0	12 SDC	325	1040	475	3090	STD	10	TT	-	bar	3.00
											km/h	1850
											40	2130

STD: Standard



**MAIN APPLICATION:
MULTIUSE**



MP 567

MP 567 is an agro-industrial tire suitable for field and road transport, municipality/maintenance operations as well as soil tillage applications depending on the tire size. The MP 567 tire provides good traction in all the weather conditions as well as excellent self-cleaning properties.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									↓	↓	
20" 12.5 - 20	11.0	12 SDC	325	1040	475	3090	STD	10	TL	-	bar	3.00	
											km/h	90	1850
											40	2130	
12.5 - 20	11.0	12 SDC	325	1040	475	3090	STD	12	TT	-	bar	3.50	
											km/h	90	2000
											40	2300	
12.5 - 20	11.0	12 SDC	325	1040	475	3090	STD	12	TL	-	bar	3.50	
											km/h	90	2000
											40	2300	
14.5 - 20	11	12 SDC	360	1116	495	3315	STD	10	TL	-	bar	2.50	
											km/h	90	2000
											40	2300	
14.5 - 20	11	12 SDC	360	1116	495	3315	STD	12	TL	-	bar	3.00	
											km/h	90	2240
											40	2580	
14.5 - 20	11	12 SDC	360	1116	495	3315	STD	14	TL	-	bar	3.50	
											km/h	90	2430
											40	2790	
14.5 - 20	11	12 SDC	360	1116	495	3315	STD	16	TL	-	bar	4.00	
											km/h	90	2575
											40	2960	
14.5 - 20	11	12 SDC	360	1116	495	3315	STD	18	TL	-	bar	4.50	
											km/h	90	2725
											40	3135	
16.0/70 - 20 (405/70 - 20)	13 SDC	12	405	1128	490	3350	STD	14	TL	-	bar	3.50	
											km/h	90	2900
											40	3340	
16.0/70 - 20 (405/70 - 20)	13 SDC	12	405	1128	490	3350	STD	14	TT	-	bar	3.50	
											km/h	90	2900
											40	3340	

STD: Standard



MAIN APPLICATION:
MULTIUSE



MP 570

MP 570 is a road-oriented and agro-industrial tire, which is suitable for excavators and compact loaders. This tire provides good traction as well as excellent self-cleaning properties in all operating conditions.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									bar	km/h
18" 12.5 - 18	11	12 SDC	308	990	450	2950	STD	10	TL	-	bar	3.00
											80	1930
											50	2000
12.5 - 18	11	12 SDC	308	990	450	2950	STD	12	TL	-	bar	3.50
											80	2030
											50	2180
20" 12.5 - 20	11	12 SDC	335	1050	480	3130	STD	10	TL	-	bar	3.00
											80	1850
											50	2065
12.5 - 20	11	12 SDC	325	1040	475	3090	STD	12	TL	-	bar	3.50
											80	2060
											50	2300
14.5 - 20	11	12 SDC	360	1116	505	3325	STD	12	TL	-	bar	3.00
											65	2430
											50	2500

STD: Standard



MAIN APPLICATION:
MULTIUSE



MP 585

MP 585 is a road-oriented and agro-industrial tire, which is suitable for multi-purpose vehicles in municipality/maintenance applications. This tire is specially engineered with a tread pattern that offers maximum stability in the most difficult working conditions.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									↓	
20" 6.50 - 20	5.50 F	4.00 E; 5.00 F	200	875	-	-	STD	10	TT	-	bar	5.50
											km/h	50
10.5 - 20	9	9 SDC	273	970	455	2890	STD	10	TL	-	bar	3.75
											km/h	90
12.5 - 20	11	12 SDC	335	1050	480	3130	STD	12	TL	-	bar	3.50
											km/h	90
											50	2240

STD: Standard



MAIN APPLICATION:
MULTIUSE



MP 590

MP 590 is an agro-industrial tire suitable for loading operations with compact loaders, telehandlers and forklifts. This tire provides good traction and excellent stability as well as high load capacity to enhance productivity.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									↓	
22.5" 18 - 22.5 (445/65 - 22.5)	14.0	-	465	1190	530	3534	STD	16	TL	-	bar	5.50
											km/h	4875
											30 DW	5450
18 - 22.5 (445/65 - 22.5)	14.0	-	480	1190	530	3534	STD	20	TL	-	bar	7.50
											km/h	5800
											30 DW	6500

STD: Standard



MAIN APPLICATION:
MULTIUSE



MP 600

MP 600 is a road-oriented and agro-industrial tire, suitable for loading operations with compact loaders and telehandlers. This tire provides good traction and excellent stability along with an extended product life-cycle.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									↓		
18"	10.5 - 18	9	9 SDC	272	920	420	2740	STD	10	TL	-	bar	3.75
												km/h	1950
												40 DW	1900
	12.5 - 18	11	12 SDC	308	990	450	2950	STD	10	TL	-	bar	3.00
												km/h	2060
												40 DW	2000
	12.5 - 18	11	12 SDC	308	990	450	2950	STD	12	TL	-	bar	3.50
												km/h	2300
												40 DW	2240
20"	400/70 - 20 (16.0/70 - 20)	13 SDC	12	405	1085	-	-	STD	14	TL	-	bar	4.00
												km/h	3550
												40 DW	3250
												50 DW	3250
24"	400/70 - 24 (16.0/70 - 24)	13 SDC	12	405	1185	545	3530	STD	10	TL	-	bar	2.50
												km/h	2975
												40 DW	2900
	400/70 - 24 (16.0/70 - 24)	13 SDC	12	405	1185	545	3530	STD	14	TL	-	bar	3.50
												km/h	3650
												40 DW	3550
	400/70 - 24 (16.0/70 - 24)	13 SDC	12	405	1185	545	3530	SPL	14	TL	-	bar	3.50
												km/h	3650
												40 DW	3550
	400/70 - 24 (16.0/70 - 24)	33.5	12	405	1185	545	3530	STD	18	TL	-	bar	4.50
												km/h	4250
												40 DW	4125

STD: Standard
SPL: Special



**MAIN APPLICATION:
MULTIUSE**



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.										bar	↓
15.3" 10.0/75 - 15.3	9.00	-	264	780	345	2285	STD	8	TT	119 A8	106 A8	bar	3.10
												km/h	
												30 FR	1525
												40 FR	1360
												30 DW	1065
												40 DW	950
10.0/75 - 15.3	9.00	-	264	780	345	2285	STD	8	TL	119 A8	106 A8	bar	3.10
												km/h	
												30 FR	1525
												40 FR	1360
												30 DW	1065
												40 DW	950
10.0/75 - 15.3	9.00	-	264	780	345	2285	IND	8	TL	119 A8	106 A8	bar	3.10
												km/h	
												30 FR	1525
												40 FR	1360
												30 DW	1065
												40 DW	950
10.0/75 - 15.3	9.00	-	264	780	345	2285	STD	10	TL	123 A8	111 A8	bar	3.90
												km/h	
												30 FR	1735
												40 FR	1550
												30 DW	1220
												40 DW	1090
10.0/75 - 15.3	9.00	-	264	780	345	2285	STD	14	TL	130 A8	118 A8	bar	5.50
												km/h	
												30 FR	2130
												40 FR	1900
												30 DW	1480
												40 DW	1320
10.0/75 - 15.3	9.00	-	264	780	345	2285	STD	18	TT	135 A8	122 A8	bar	7.10
												km/h	
												30 FR	2440
												40 FR	2180
												30 DW	1680
												40 DW	1500

STD: Standard
IND: Industrial



**MAIN APPLICATION:
MULTIUSE**



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.										↓	
15.3" 10.0/75 - 15.3	9.00	-	264	780	345	2285	STD	18	TL	135 A8	122 A8	bar	7.10
												km/h	
												30 FR	2440
												40 FR	2180
												30 DW	1680
												40 DW	1500
11.5/80 - 15.3	9.00	-	290	867	380	2540	STD	8	TT	126 A8	114 A8	bar	2.70
												km/h	
												30 FR	1905
												40 FR	1700
												30 DW	1320
												40 DW	1180
11.5/80 - 15.3	9.00	-	290	867	380	2540	STD	8	TL	126 A8	114 A8	bar	2.70
												km/h	
												30 FR	1905
												40 FR	1700
												30 DW	1320
												40 DW	1180
11.5/80 - 15.3	9.00	-	290	867	380	2540	STD	10	TL	131 A8	119 A8	bar	3.40
												km/h	
												30 FR	2185
												40 FR	1950
												30 DW	1525
												40 DW	1360
11.5/80 - 15.3	9.00	-	290	867	380	2540	STD	12	TT	135 A8	123 A8	bar	4.10
												km/h	
												30 FR	2440
												40 FR	2180
												30 DW	1735
												40 DW	1550

STD: Standard



**MAIN APPLICATION:
MULTIUSE**



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.										bar	↓
15.3" 11.5/80 - 15.3	9.00	-	290	867	380	2540	STD	12	TL	135 A8	123 A8	bar	4.10
												km/h	
												30 FR	2440
												40 FR	2180
												30 DW	1735
												40 DW	1550
11.5/80 - 15.3	9.00	-	290	867	380	2540	STD	14	TT	139 A8	126 A8	bar	4.80
												km/h	
												30 FR	2720
												40 FR	2430
												30 DW	1905
												40 DW	1700
11.5/80 - 15.3	9.00	-	290	867	380	2540	STD	14	TL	139 A8	126 A8	bar	4.80
												km/h	
												30 FR	2720
												40 FR	2430
												30 DW	1905
												40 DW	1700
27 X 10 - 15.3	9.00	-	260	695	317	2071	STD	8	TT	107 A8	95 A8	bar	3.10
												km/h	
												30 FR	1090
												40 FR	975
												30 DW	775
												40 DW	690
27 X 10 - 15.3	9.00	-	260	695	317	2071	STD	8	TL	107 A8	95 A8	bar	3.10
												km/h	
												30 FR	1090
												40 FR	975
												30 DW	775
												40 DW	690
16" 6.00 - 16	4.00 E	4.50 E; 4½ K	164	735	343	2190	STD	6	TT	95 A8	83 A8	bar	2.80
												km/h	
												30 FR	775
												40 FR	690
												30 DW	545
												40 DW	485

STD: Standard



**MAIN APPLICATION:
MULTIUSE**



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.										↓	
16" 7.50 - 16	5.50 F	4.50 E; 5.00 F; 4.00 E; 5 K; 6 LB; 6.00 F	209	803	372	2393	STD	6	TT	104 A8	92 A8	bar	2.30
												km/h	
												30 FR	1010
												40 FR	900
												30 DW	705
												40 DW	630
7.50 - 16	5.50 F	4.50 E; 5.00 F; 4.00 E; 5 K; 6 LB; 6.00 F	209	803	372	2393	STD	8	TT	112 A8	99 A8	bar	3.20
												km/h	
												30 FR	1255
												40 FR	1120
												30 DW	870
												40 DW	775
7.50 - 16	5.50 F	4.50 E; 5.00 F; 4.00 E; 5 K; 6 LB; 6.00 F	209	803	372	2393	STD	8	TL	112 A8	99 A8	bar	3.20
												km/h	
												30 FR	1255
												40 FR	1120
												30 DW	870
												40 DW	775
7.50 - 16	5.50 F	4.50 E; 5.00 F; 4.00 E; 5 K; 6 LB; 6.00 F	209	803	372	2393	HD	8	TT	112 A8	99 A8	bar	3.20
												km/h	
												30 FR	1255
												40 FR	1120
												30 DW	870
												40 DW	775
9.0/70 - 16	W 7	-	222	760	355	2285	STD	10	TL	119 A8	106 A8	bar	4.40
												km/h	
												30 FR	1525
												40 FR	1360
												30 DW	1065
												40 DW	950
270/75 - 16 (10.0/75 - 16)	9.00	-	250	810	-	-	STD	-	TL	123 A8	111 A8	bar	3.90
												km/h	
												30 FR	1735
												40 FR	1550
												30 DW	1220
												40 DW	1090

STD: Standard
HD: Heavy Duty



**MAIN APPLICATION:
MULTIUSE**



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.										↓	
17" 15.0/55 - 17	13.00	13	380	890	395	2608	STD	10	TL	134 A8	122 A8	bar	2.60
												km/h	
												30 FR	2375
												40 FR	2120
												30 DW	1680
												40 DW	1500
15.0/55 - 17	13.00	13	380	890	395	2608	STD	14	TL	141 A8	129 A8	bar	3.60
												km/h	
												30 FR	2885
												40 FR	2575
												30 DW	2070
												40 DW	1850
19.0/45 - 17	16.00	-	465	865	389	2578	STD	14	TL	144 A8	131 A8	bar	2.80
												km/h	
												30 FR	3135
												40 FR	2800
												30 DW	2185
												40 DW	1950
420/55 - 17	13.00	-	430	910	407	2712	STD	14	TL	142 A8	129 A8	bar	3.00
												km/h	
												30 FR	2970
												40 FR	2650
												30 DW	2070
												40 DW	1850
420/55 - 17	13.00	-	430	910	407	2712	STD	16	TL	145 A8	133 A8	bar	3.50
												km/h	
												30 FR	3250
												40 FR	2900
												30 DW	2305
												40 DW	2060

STD: Standard



MAIN APPLICATION:
MULTIUSE



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.										↓	
18" 7.50 - 18	5.50 F	4.50 E; 6.00 F; 5.00 F	209	854	407	2649	STD	6	TT	106 A8	94 A8	bar	2.30
												km/h	
												30 FR	1065
												40 FR	950
												30 DW	750
												40 DW	670
7.50 - 18	5.50 F	4.50 E; 6.00 F; 5.00 F	209	854	407	2649	STD	8	TT	114 A8	101 A8	bar	3.10
												km/h	
												30 FR	1320
												40 FR	1180
												30 DW	925
												40 DW	825
10.5/80 - 18	W 9	9; W 8	274	907	405	2657	STD	10	TL	131 A8	119 A8	bar	3.70
												km/h	
												30 FR	2185
												40 FR	1950
												30 DW	1525
												40 DW	1360
12.5/80 - 18	W 9	9; 11	308	987	438	2892	STD	12	TL	142 A8	129 A8	bar	3.70
												km/h	
												30 FR	2970
												40 FR	2650
												30 DW	2070
												40 DW	1850
12.5/80 - 18	W 9	9; 11	308	987	438	2892	SPL	12	TL	142 A8	129 A8	bar	3.70
												km/h	
												30 FR	2970
												40 FR	2650
												30 DW	2070
												40 DW	1850
12.5/80 - 18	W 9	9; 11	308	987	438	2892	STD	16	TL	148 A8	135 A8	bar	4.90
												km/h	
												30 FR	3530
												40 FR	3150
												30 DW	2440
												40 DW	2180

STD: Standard
SPL: Special



**MAIN APPLICATION:
MULTIUSE**



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.										bar	↓
18" 12.5/80 - 18	W 9	9; 11	308	987	438	2892	STD	18	TL	150 A8	138 A8	bar	5.50
												km/h	
												30 FR	3750
												40 FR	3350
												30 DW	2645
												40 DW	2360
20" 7.50 - 20	5.50 F	4.50 E; 6.00 F; 5.00 F	209	904	422	2695	STD	8	TT	116 A8	103 A8	bar	3.20
												km/h	
												30 FR	1400
												40 FR	1250
												30 DW	980
												40 DW	875
16.0/70 - 20	13	12 SDC; 14; 13 SDC	408	1097	487	3214	STD	10	TL	147 A8	135 A8	bar	2.50
												km/h	
												30 FR	3445
												40 FR	3075
												30 DW	2440
												40 DW	2180
16.0/70 - 20	13	12 SDC; 14; 13 SDC	408	1097	487	3214	STD	12	TL	151 A8	139 A8	bar	3.00
												km/h	
												30 FR	3865
												40 FR	3450
												30 DW	2720
												40 DW	2430
16.0/70 - 20	13	12 SDC; 14; 13 SDC	408	1097	487	3214	STD	14	TL	154 A8	142 A8	bar	3.50
												km/h	
												30 FR	4200
												40 FR	3750
												30 DW	2970
												40 DW	2650
16.0/70 - 20	13	12 SDC; 14; 13 SDC	408	1097	487	3214	STD	16	TL	156 A8	144 A8	bar	4.00
												km/h	
												30 FR	4480
												40 FR	4000
												30 DW	3135
												40 DW	2800
400/70 - 20	13	12 SDC; 14; 13 SDC	408	1097	487	3214	IND	-	TL	-	-	bar	4.00
												km/h	
												30	3380
												40	3250

STD: Standard
IND: Industrial



**MAIN APPLICATION:
MULTIUSE**



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.										bar	kg
24" 15.5/80 - 24	W 12	W 13; W 14 L	384	1262	566	3655	STD	10	TL	154 A8	142 A8	bar	2.50
												km/h	
												30 FR	4200
												40 FR	3750
												30 DW	2970
												40 DW	2650
15.5/80 - 24	W 12	W 13; W 14 L	384	1262	566	3655	STD	12	TL	157 A8	145 A8	bar	3.00
												km/h	
												30 FR	4620
												40 FR	4125
												30 DW	3250
												40 DW	2900
15.5/80 - 24	W 12	W 13; W 14 L	384	1262	566	3655	STD	14	TL	160 A8	148 A8	bar	3.50
												km/h	
												30 FR	5040
												40 FR	4500
												30 DW	3530
												40 DW	3150
15.5/80 - 24	W 12	W 13; W 14 L	384	1262	566	3655	SPL	14	TL	160 A8	148 A8	bar	3.50
												km/h	
												30 FR	5040
												40 FR	4500
												30 DW	3530
												40 DW	3150
15.5/80 - 24	W 12	W 13; W 14 L	384	1262	566	3655	STD	16	TL	163 A8	151 A8	bar	4.00
												km/h	
												30 FR	5460
												40 FR	4875
												30 DW	3865
												40 DW	3450
16.5/85 - 24	W 13	W 14 L; W 15 L	415	1325	591	3837	STD	10	TL	158 A8	146 A8	bar	2.40
												km/h	
												30 FR	4760
												40 FR	4250
												30 DW	3360
												40 DW	3000

STD: Standard
SPL: Special



**MAIN APPLICATION:
MULTIUSE**



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.										↓	
24" 16.5/85 - 24	W 13	W 14 L; W 15 L	415	1325	591	3837	STD	12	TL	163 A8	151 A8	bar	2.80
												km/h	
												30 FR	5460
												40 FR	4875
												30 DW	3865
												40 DW	3450
16.5/85 - 24	W 13	W 14 L; W 15 L	415	1325	591	3837	STD	16	TT	168 A8	155 A8	bar	3.80
												km/h	
												30 FR	6270
												40 FR	5600
												30 DW	4340
												40 DW	3875
16.5/85 - 24	W 13	W 14 L; W 15 L	415	1325	591	3837	STD	16	TL	168 A8	155 A8	bar	3.80
												km/h	
												30 FR	6270
												40 FR	5600
												30 DW	4340
												40 DW	3875
400/80 - 24	W 13	W 12; W 14 L	394	1262	566	3655	IND	-	TL	-	-	bar	3.80
												km/h	
												30	4160
												40	4000
400/80 - 24	W 13	W 12; W 14 L	394	1262	566	3655	IND	-	TL	-	-	bar	5.00
												km/h	
												30	4940
												40	4750

STD: Standard
IND: Industrial



**MAIN APPLICATION:
FRONT**



TF 8181 (F-2)

TF 8181 is a field and road tire designed for 2WD tractors in soil tillage and transport applications. This tire ensures a high level of handling comfort. The tire is available in different versions to specifically meet end-user requirements in terms of cut and chip resistance and heavy-duty service.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
15" 5.00 - 15	4.00 E	3.00 D; 4 J; 4½ J	142	655	307	1951	STD	4	TT	73 A6	2.80	365
5.00 - 15	4.00 E	3.00 D; 4 J; 4½ J	142	655	307	1951	STD	6	TT	82 A6	3.70	475
16" 4.00 - 16	3.00 D	-	112	630	301	1877	STD	4	TT	69 A6	3.40	325
4.50 - 16	3.00 D	-	122	655	311	1952	STD	4	TT	73 A6	3.10	365
5.00 - 16	4.00 E	3.00 D; 4 J; 4½ J	140	680	322	2025	STD	4	TT	76 A6	2.80	400
5.00 - 16	4.00 E	3.00 D; 4 J; 4½ J	140	680	322	2025	STD	6	TT	84 A6	4.20	500
5.00 - 16	4.00 E	3.00 D; 4 J; 4½ J	140	680	322	2025	SPL	6	TT	84 A6	4.20	500
5.50 - 16	4.00 E	3.50 D; 4.50 E	158	720	340	2145	STD	6	TT	86 A6	3.70	530
5.50 - 16	4.00 E	3.50 D; 4.50 E	158	720	340	2145	SPL	6	TT	86 A6	3.70	530
6.00 - 16	4.50 E	4.00 E; 5 K; 5.00 F	170	745	350	2220	STD	6	TT	88 A6	3.30	560
6.00 - 16	4.50 E	4.00 E; 5 K; 5.00 F	170	745	350	2220	SPL	6	TT	88 A6	3.30	560
6.00 - 16	4.50 E	4.00 E; 5 K; 5.00 F	170	745	350	2220	STD	8	TT	94 A6	4.50	670
6.00 - 16	4.50 E	4.00 E; 5 K; 5.00 F	170	745	350	2220	SPL	8	TT	94 A6	4.50	670
6.50 - 16	4.50 E	4.00 E; 5 K; 5.00 F; 5.50 F	180	770	361	2295	STD	6	TT	91 A6	3.10	615

STD: Standard
SPL: Special



**MAIN APPLICATION:
FRONT**



TF 8181 (F-2)

TF 8181 is a field and road tire designed for 2WD tractors in soil tillage and transport applications. This tire ensures a high level of handling comfort. The tire is available in different versions to specifically meet end-user requirements in terms of cut and chip resistance and heavy-duty service.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.										
16" 6.50 - 16	4.50 E	4.00 E; 5 K; 5.00 F; 5.50 F	180	770	361	2295	HD	8	TT	98 A6	4.20	750
6.50 - 16	4.50 E	4.00 E; 5 K; 5.00 F; 5.50 F	180	770	361	2295	SPL	10	TT	102 A6	5.30	850
7.50 - 16	5.50 F	5.00 F; 5 K; 6.00 F	205	820	383	2445	STD	6	TT	98 A6	2.80	750
7.50 - 16	5.50 F	5.00 F; 5 K; 6.00 F	205	820	383	2445	SPL	6	TT	98 A6	2.80	750
7.50 - 16	5.50 F	5.00 F; 5 K; 6.00 F	205	820	383	2445	STD	8	TT	103 A6	3.70	875
7.50 - 16	5.50 F	5.00 F; 5 K; 6.00 F	205	820	383	2445	SPL	8	TT	103 A6	3.70	875
7.50 - 16	5.50 F	5.00 F; 5 K; 6.00 F	205	820	383	2445	STD	10	TT	109 A6	4.80	1030
7.50 - 16	5.50 F	5.00 F; 5 K; 6.00 F	205	820	383	2445	IMP	14	TT	122 A6	5.50	1500
10.00 - 16	W 8	W 8 L	273	895	411	2667	STD	8	TT	115 A6	2.80	1215
11.00 - 16	W 10 L	W 8; W 8 L	326	980	447	2920	STD	8	TT	118 A6	2.50	1320
18" 7.50 - 18	5.50 F	-	208	875	410	2605	STD	6	TT	101 A6	2.80	825
7.50 - 18	5.50 F	-	208	875	410	2605	STD	8	TT	106 A6	3.70	950
19" 6.00 - 19	4.50 E	4.00 E; 5.00 F	165	814	385	2425	STD	6	TT	93 A6	3.30	650

HD: Heavy Duty
SPL: Special
STD: Standard
IMP: Implement



MAIN APPLICATION:
FRONT



TF 8181 (F-2)

TF 8181 is a field and road tire designed for 2WD tractors in soil tillage and transport applications. This tire ensures a high level of handling comfort. The tire is available in different versions to specifically meet end-user requirements in terms of cut and chip resistance and heavy-duty service.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
20" 6.50 - 20	5.00 F	4.00 E; 5.50 F	180	865	409	2578	STD	6	TT	97 A6	3.10	730
6.50 - 20	5.00 F	4.00 E; 5.50 F	180	865	409	2578	STD	8	TT	101 A6	3.90	825
6.50 - 20	5.00 F	4.00 E; 5.50 F	180	865	409	2578	SPL	8	TT	101 A6	3.90	825
7.50 - 20	5.50 F	5.00 F	205	915	431	2725	STD	6	TT	103 A6	2.80	875
7.50 - 20	5.50 F	5.00 F	205	915	431	2725	HD	6	TT	103 A6	2.80	875
7.50 - 20	5.50 F	5.00 F	205	915	431	2725	STD	8	TT	109 A6	3.40	1030
7.50 - 20	5.50 F	5.00 F	205	915	431	2725	HD	8	TT	109 A6	3.40	1030

HD: Heavy Duty
SPL: Special
STD: Standard



MAIN APPLICATION:
FRONT



TF 9090 (F-2)

TF 9090 is a field-oriented tire designed for 2WD tractors in soil tillage operations. Its "special" version ensures extra puncture resistance for tire usage in critical conditions.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
12" 4.00 - 12	3.00 D	2.50 C	112	530	255	1573	STD	4	TT	60 A6	3.40	250
4.00 - 12	3.00 D	2.50 C	112	530	255	1573	STD	6	TT	68 A6	5.10	315
15" 5.00 - 15	4.00 E	3.00 D; 4 J; 4½ J	140	655	307	1951	STD	4	TT	73 A6	2.80	365
5.00 - 15	4.00 E	3.00 D; 4 J; 4½ J	140	655	307	1951	STD	6	TT	82 A6	3.70	475
16" 4.00 - 16	3.00 D	-	112	630	301	1877	STD	4	TT	69 A6	3.40	325
5.50 - 16	4.00 E	3.50 D; 4.50 E	150	710	332	2116	STD	6	TT	86 A6	3.70	530
6.00 - 16	4.50 E	4.00 E; 5 K; 5.00 F	170	735	346	2190	STD	6	TT	88 A6	3.30	560
6.00 - 16	4.50 E	4.00 E; 5 K; 5.00 F	170	735	346	2190	SPL	6	TT	88 A6	3.30	560
6.00 - 16	4.50 E	4.00 E; 5 K; 5.00 F	170	735	346	2190	STD	8	TT	94 A6	4.50	670
6.00 - 16	4.50 E	4.00 E; 5 K; 5.00 F	170	735	346	2190	SPL	8	TT	94 A6	4.50	670
6.50 - 16	4.50 E	4.00 E; 5 K; 5.00 F; 5.50 F	180	765	359	2280	STD	6	TT	91 A6	3.10	615
6.50 - 16	4.50 E	4.00 E; 5 K; 5.00 F; 5.50 F	180	765	359	2280	STD	8	TT	98 A6	4.20	750
7.50 - 16	5.50 F	5.00 F; 5 K; 6.00 F	207	810	379	2414	STD	6	TT	98 A6	2.80	750
7.50 - 16	5.50 F	5.00 F; 5 K; 6.00 F	207	810	379	2414	SPL	6	TT	98 A6	2.80	750

SPL: Special
STD: Standard



MAIN APPLICATION:
FRONT



TF 9090 (F-2)

TF 9090 is a field-oriented tire designed for 2WD tractors in soil tillage operations. Its "special" version ensures extra puncture resistance for tire usage in critical conditions.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
16" 7.50 - 16	5.50 F	5.00 F; 5 K; 6.00 F	207	810	379	2414	STD	8	TT	103 A6	3.70	875
7.50 - 16	5.50 F	5.00 F; 5 K; 6.00 F	207	810	379	2414	SPL	8	TT	103 A6	3.70	875
7.50 - 16	5.50 F	5.00 F; 5 K; 6.00 F	207	810	379	2414	STD	10	TT	109 A6	4.80	1030
9.00 - 16	W 8	6.00 F; W 7; W 8 L	257	855	398	2548	STD	8	TT	111 A6	3.10	1090
9.00 - 16	W 8	6.00 F; W 7; W 8 L	257	855	398	2548	STD	10	TT	116 A6	3.90	1250
9.00 - 16	W 8	6.00 F; W 7; W 8 L	257	855	398	2548	SPL	10	TT	116 A6	3.90	1250
10.00 - 16	W 8	W 8 L	275	900	418	2682	STD	8	TT	115 A6	2.80	1215
10.00 - 16	W 8	W 8 L	275	900	418	2682	SPL	8	TT	115 A6	2.80	1215
10.00 - 16	W 8	W 8 L	275	900	418	2682	STD	10	TT	119 A6	3.40	1360
10.00 - 16	W 8	W 8 L	275	900	418	2682	SPL	10	TT	119 A6	3.40	1360
11.00 - 16	W 10 L	W 8; W 8 L	320	970	448	2890	STD	8	TT	118 A6	2.50	1320
11.00 - 16	W 10 L	W 8; W 8 L	320	970	448	2890	SPL	8	TT	118 A6	2.50	1320
18" 7.50 - 18	5.50 F	-	207	860	404	2562	STD	6	TT	101 A6	2.80	825
7.50 - 18	5.50 F	-	207	860	404	2562	SPL	6	TT	101 A6	2.80	825
7.50 - 18	5.50 F	-	207	860	404	2562	STD	8	TT	106 A6	3.70	950

SPL: Special
STD: Standard



MAIN APPLICATION:
FRONT



TF 9090 (F-2)

TF 9090 is a field-oriented tire designed for 2WD tractors in soil tillage operations. Its "special" version ensures extra puncture resistance for tire usage in critical conditions.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
18" 7.50 - 18	5.50 F	-	207	860	404	2562	SPL	8	TT	106 A6	3.70	950
7.50 - 18	5.50 F	-	207	860	404	2562	STD	10	TT	113 A6	4.75	1150
19" 4.00 - 19	3.00 D	-	115	715	343	2145	STD	4	TT	72 A6	3.40	355
6.00 - 19	4.50 E	4.00 E; 5.00 F	167	815	386	2445	STD	6	TT	93 A6	3.30	650
20" 7.50 - 20	5.50 F	5.00 F	205	915	431	2725	STD	6	TT	103 A6	2.80	875
7.50 - 20	5.50 F	5.00 F	205	915	431	2725	SPL	6	TT	103 A6	2.80	875
7.50 - 20	5.50 F	5.00 F	205	915	431	2725	STD	8	TT	109 A6	3.40	1030
7.50 - 20	5.50 F	5.00 F	205	915	431	2725	SPL	8	TT	109 A6	3.40	1030

SPL: Special
STD: Standard



MAIN APPLICATION:
FRONT



TF 9393 (F-1)

TF 9393 is a F-1 agricultural front tire specifically designed for utility tractors. Its tread shows a wide center part and shoulder ribs. The special tread design provides excellent steering performance on all surfaces. TF 9393 features a strong casing in addition to a particularly stubble-resistant compound to ensure extraordinary durability and a long service life.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
16" 7.50 - 16	5.50 F	5.00 F; 6.00 F	210	810	-	-	STD	8	TT	-	3.70	875

STD: Standard



COMMANDER (F) (F-2)

COMMANDER (F) is a 3-rib pattern tire with shoulder notches providing excellent grip. Its deep tread made of a cut-and-chip-resistant compound ensures a longer tire life. The strong casing along with the hard tread compound makes COMMANDER (F) a tough tire for rough conditions. The flatter tread profile provides a uniform load distribution.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
16" 5.50 - 16	4.00 E	3.50D; 4.50E	155	720	-	-	STD	6	TT	86 A6	3.70	530
6.00 - 16	4.50 E	4.00 E; 5.00 F	170	750	-	-	STD	8	TT	94 A6	4.50	670
6.50 - 16	4.50 E	4.00 E; 5.00 F; 5.50 F	180	780	-	-	STD	8	TT	98 A6	4.20	750
7.50 - 16	5.50 F	5.00 F; 5 K; 6.00 F	205	810	-	-	STD	8	TT	103 A6	3.70	875

STD: Standard



MAIN APPLICATION:
FRONT



COMMANDER TWIN RIB (F-2)

COMMANDER TWIN RIB is a 4-rib pattern tire with shoulder notches providing excellent grip. Its sturdy buttress region offers excellent sidewall protection whereas its wider tread profile ensures good load distribution.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
16" 6.00 - 16	4.50 E	4.00 E; 5.00 F	170	750	-	-	STD	8	TT	94 A6	4.50	670
20" 6.50 - 20	5.50 F	4.00 E; 5.00 F	196	875	-	-	STD	8	TT	101 A6	4.50	825

STD: Standard



COMMANDER 3 RIB (F-2)

COMMANDER 3 RIB is a 3-rib pattern front tire that provides excellent steering performance on loose and cultivated soil due to a wide and deep center rib. The strong casing along with the stubble-resistant compound ensure outstanding puncture resistance. COMMANDER 3 RIB also features superior wear resistance thanks to the optimized load distribution on center and shoulder ribs.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
16" 6.00 - 16	4.50 E	4.00 E; 5.00 F	175	740	-	-	STD	8	TT	94 A6	4.50	670

STD: Standard



MAIN APPLICATION:
FRONT



POWER RIB F2

POWER RIB F2 has been specially designed for 2WD tractors in soil tillage applications. This field-oriented tire is particularly suitable for all operations requiring a high level of handling comfort.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
15" 11L - 15 SL	8 LB	10 LB	279	813	374	2423	STD	8	TL	110 A6	3.00	1060

STD: Standard



PRO RIB F2M (F-2M)

PRO RIB F2M is a field-oriented tire for 2WD tractors in soil tillage applications. It is particularly suitable for all operations requiring a high level of handling. It provides high flotation capability contributing to reduce soil compaction.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 40 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
15" 9.5L - 15 SL	7.00	8 LB	240	780	364	2325	STD	8	TL	102 A8	3.30	850
11L - 15 SL	8 LB	10 LB	280	795	370	2370	STD	8	TL	106 A8	3.00	950
16" 10.00 - 16 SL	8 LB	W 8 L	280	880	409	2620	STD	8	TT	110 A8	3.00	1060
11.00 - 16 SL	10 LB	W 8 L; 8 LB	335	950	440	2830	STD	8	TT	114 A8	2.80	1180
16.1" 14L - 16.1 SL	W 11 C	-	355	980	453	2920	STD	12	TL	127 A8	3.60	1750

STD: Standard



MAIN APPLICATION:
FRONT



RIB F3 (F-3)

RIB F3 is a field-oriented tire designed for 2WD tractors in soil tillage operations. Some sizes are suitable for transport applications using implement machinery and trailers. The RIB F3 tire is the ideal partner for all operations that require a high level of handling. It also ensures significant fuel savings to improve your business productivity.



HANDLING



FUEL ECONOMY

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									↓		
16" 9.00 - 16	W 8	6.00 F; W 7; W 8 L	245	878	387	2573	STD	12	TT	120 A6/ 112 A8	bar	4.70	
											km/h	30	1400
											40	1120	
9.00 - 16	W 8	6.00 F; W 7; W 8 L	245	878	387	2573	HD	12	TT	120 A6/ 112 A8	bar	4.70	
											km/h	30	1400
											40	1120	

HD: Heavy Duty
STD: Standard



MAIN APPLICATION:
FRONT



STEER FARM (F-2)

STEER FARM has been designed for 2WD tractors in soil tillage applications as well as in-the-field and on-the-road transport. This tire features high cut and chip resistance and reduces stone retention making it suitable for all your heavy-duty service operations. STEER FARM has been specifically engineered for agricultural needs and is tested to provide an extended tire life-cycle.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
14" 5.20 - 14	3.50 D	4.00 E	135	625	-	-	STD	6	TT	-	4.50	387
16" 6.00 - 16	4.50 E	4.00 E; 5 K; 5.00 F	170	740	345	2205	STD	8	TT	94 A6	4.50	670
6.50 - 16	4.50 E	4.00 E; 5.00 F; 5.50 F	185	770	-	-	STD	8	TT	98 A6	4.20	750
7.50 - 16	5.50 F	5.00 F; 5 K; 6.00 F	205	805	373	2391	STD	8	TT	103 A6	3.70	875
20" 6.50 - 20	5.50 F	4.00 E; 5.00 F	196	878	-	-	STD	8	TT	101 A6	4.50	825

STD: Standard



**MAIN APPLICATION:
IMPLEMENT**



AW 711

AW 711 is an implement radial tire specially designed for modern farming, and suitable for general purpose applications. Thanks to its special tread compound, the AW 711 has an extended product life-cycle, whether it is used on soft or hard surfaces. The low rolling resistance during on-road travel ensures significant savings in fuel consumption.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)											
		Rec.	Alt.							↓											
16.5" 265/70 R 16.5 (10 R 16.5)	134 A8/B	8.25	-	264	773	-	-	-	SR	bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0		
										km/h	50	680	895	1085	1255	1445	1635	1760	1930	2120	
											40	680	895	1085	1255	1445	1635	1760	1930	2120	
											30	760	1000	1215	1405	1615	1830	1975	2165	2375	
											25	810	1065	1290	1490	1720	1945	2100	2300	2525	
											20	860	1125	1365	1580	1820	2060	2225	2435	2675	
											10	955	1250	1515	1755	2020	2290	2470	2705	2970	
305/70R16.5 (12 R 16.5)	148 A8/B	9.75	-	325	851	-	-	-	SR	bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	5.0	
										km/h	50	945	1230	1515	1735	2020	2300	2460	2710	2965	3150
											40	945	1230	1515	1735	2020	2300	2460	2710	2965	3150
											30	1060	1380	1695	1945	2260	2580	2755	3040	3320	3530
											25	1125	1465	1800	2065	2400	2740	2925	3225	3525	3750
											20	1195	1550	1910	2185	2545	2900	3100	3415	3735	3970
											10	1325	1720	2120	2430	2825	3220	3440	3795	4150	4410
340/60 R 16.5	145 A8/B	11	-	324	820	368	2476	390	SR	bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	5.0	
										km/h	50	870	1135	1395	1595	1860	2120	2265	2495	2730	2900
											40	870	1135	1395	1595	1860	2120	2265	2495	2730	2900
											30	975	1270	1560	1790	2080	2375	2535	2795	3055	3250
											25	1040	1350	1660	1905	2215	2525	2695	2975	3250	3455
											20	1100	1430	1755	2015	2340	2670	2855	3145	3440	3655
											10	1220	1585	1950	2235	2600	2965	3170	3495	3820	4060
380/55 R 16.5	150 A/B	12	11.75	360	830	372	2500	390	SR	bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	5.0	
										km/h	50	1005	1310	1610	1845	2145	2450	2615	2885	3150	3350
											40	1130	1465	1805	2070	2405	2745	2930	3230	3530	3755
											30	1200	1560	1920	2195	2555	2915	3115	3435	3755	3990
											25	1270	1650	2030	2325	2705	3085	3300	3635	3975	4225
											20	1410	1830	2255	2580	3005	3425	3660	4035	4410	4690
											10	1410	1830	2255	2580	3005	3425	3660	4035	4410	4690
395/55 R 16.5	152 A8/B	12	-	394	838	-	-	-	SR	bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	5.0	
										km/h	50	1065	1385	1705	1955	2275	2595	2770	3055	3340	3550
											40	1065	1385	1705	1955	2275	2595	2770	3055	3340	3550
											30	1195	1555	1915	2190	2550	2910	3105	3425	3745	3980
											25	1270	1650	2030	2325	2705	3085	3300	3635	3975	4225
											20	1345	1750	2150	2465	2865	3270	3495	3850	4210	4475
											10	1495	1940	2390	2735	3185	3630	3880	4275	4675	4970

SR: Stubble Resistant



**MAIN APPLICATION:
IMPLEMENT**



AW 711

AW 711 is an implement radial tire specially designed for modern farming, and suitable for general purpose applications. Thanks to its special tread compound, the AW 711 has an extended product life-cycle, whether it is used on soft or hard surfaces. The low rolling resistance during on-road travel ensures significant savings in fuel consumption.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)																				
		Rec.	Alt.																											
17" VF 480/45 R 17	167 A8/B	16.00	-	491	866	363	2606	410	SB	bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	5.0										
										km/h																				
										From 10 to 50 km/h	1585	2020	2455	2780	3220	3655	4035	4415	4855	5450										
18" IF 340/65 R 18	153 A8/B	W 11		330	899	0	0		SR	bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0											
										km/h																				
										From 10 to 50 km/h	1170	1535	1865	2155	2485	2815	3030	3325	3650											
18" 400/60 R 18	159 A8/B	14	13	394	945	419	2807	450	SR	bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	3.8	4.0	5.0	5.5								
										50	1220	1585	1950	2235	2600	2965	3165	3490	3655	3815	4057	4375								
										40	1220	1585	1950	2235	2600	2965	3165	3490	3655	3815	4057	4375								
										30	1365	1775	2185	2500	2910	3320	3550	3910	4095	4275	4545	4900								
										25	1450	1885	2320	2660	3095	3530	3770	4155	4350	4545	4830	5210								
										20	1535	1995	2460	2815	3275	3735	3990	4400	4605	4810	5115	5515								
										10	1705	2220	2730	3125	3640	4150	4435	4885	5115	5340	5680	6125								
18" 440/55 R 18	159 A8/B	14	13	410	945	432	2893	450	SR	bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	5.0										
										50	1315	1710	2100	2410	2800	3195	3415	3765	4115	4375										
										40	1315	1710	2100	2410	2800	3195	3415	3765	4115	4375										
										30	1470	1915	2355	2695	3140	3580	3825	4215	4610	4900										
										25	1565	2035	2505	2870	3335	3805	4065	4485	4900	5210										
										20	1655	2155	2650	3035	3530	4030	4305	4745	5185	5515										
										10	1840	2390	2940	3370	3920	4475	4780	5270	5760	6125										
19.5" 15 R 19.5	139 D	11.75	12.75	389	1019	452	3055	475	SR	bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	5.0	5.5									
										65	660	855	1045	1170	1365	1535	1705	1850	2045	2285	2430									
										50	840	1090	1340	1495	1745	1960	2180	2365	2615	2925	3110									
										40	885	1145	1405	1565	1830	2055	2285	2480	2740	3065	3260									
										25	960	1245	1530	1710	1995	2240	2490	2705	2990	3345	3555									
										20	1335	1730	2125	2370	2765	3110	3455	3755	4150	4640	4935									
										10	1335	1730	2125	2370	2765	3110	3455	3755	4150	4640	4935									

STD: Standard
SB: Steel Belted
SR: Stubble Resistant



**MAIN APPLICATION:
IMPLEMENT**



AW 702

AW 702 has been developed for implement machinery and trailers in soil tillage and transport applications. This heavy-duty tire has been designed by BKT to provide a new level of durability. AW 702 is available in different versions to meet specific end-user needs.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.										bar	km/h
12" 7.00 - 12	4.25	-	185	665	295	1948	STD	6	TL	95 A8	-	bar	2.50
												km/h	775
												30 FR	690
	4.25	-	185	665	295	1948	AB	6	TL	95 A8	-	bar	2.50
												km/h	775
												40 FR	690
10.0/80 - 12	9.00	7.0	264	710	313	2080	STD	8	TL	116 A8	-	bar	3.10
												km/h	1400
												30 FR	1250
	9.00	7.0	264	710	313	2080	STD	10	TL	121 A8	-	bar	3.90
												km/h	1625
												40 FR	1450
9.00	7.0	264	710	313	2080	AB	10	TL	121 A8	-	bar	3.90	
											km/h	1625	
											40 FR	1450	
9.00	7.0	264	710	313	2080	SPL	10	TL	121 A8	-	bar	3.90	
											km/h	1625	
											40 FR	1450	
15.3" 10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	8	TT	119 A8	-	bar	3.10
												km/h	1525
												40 FR	1360
	9.00	-	274	760	343	2227	STD	10	TT	123 A8	-	bar	3.90
												km/h	1735
												40 FR	1550
9.00	-	274	760	343	2227	STD	10	TL	123 A8	-	bar	3.90	
											km/h	1735	
											40 FR	1550	
9.00	-	274	760	343	2227	STD	12	TT	126 A8	-	bar	4.70	
											km/h	1905	
											40 FR	1700	

STD: Standard
AB: Aramid Belted
SPL: Special



**MAIN APPLICATION:
IMPLEMENT**



AW 702

AW 702 has been developed for implement machinery and trailers in soil tillage and transport applications. This heavy-duty tire has been designed by BKT to provide a new level of durability. AW 702 is available in different versions to meet specific end-user needs.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.										↓		
15.3" 10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	12	TL	126 A8	-	bar	4.70	
												km/h	30 FR	1905
												40 FR	1700	
10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	14	TT	130 A8	-	bar	5.50	
												km/h	30 FR	2130
												40 FR	1900	
10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	14	TL	130 A8	-	bar	5.50	
												km/h	30 FR	2130
												40 FR	1900	
10.0/75 - 15.3	9.00	-	274	760	343	2227	SPL	14	TL	130 A8	-	bar	5.50	
												km/h	30 FR	2130
												40 FR	1900	
10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	18	TL	135 A8	-	bar	7.10	
												km/h	30 FR	2440
												40 FR	2180	
10.0/75 - 15.3	9.00	-	274	760	343	2227	HD	18	TL	135 A8	-	bar	7.10	
												km/h	30 FR	2440
												40 FR	2180	
10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	22	TL	137 A8	-	bar	7.10	
												km/h	30 FR	2575
												40 FR	2300	
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	10	TT	131 A8	-	bar	3.40	
												km/h	30 FR	2185
												40 FR	1950	
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	10	TL	131 A8	-	bar	3.40	
												km/h	30 FR	2185
												40 FR	1950	
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	12	TT	135 A8	-	bar	4.10	
												km/h	30 FR	2440
												40 FR	2180	
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	12	TL	135 A8	-	bar	4.10	
												km/h	30 FR	2440
												40 FR	2180	

STD: Standard
SPL: Special
HD: Heavy Duty



**MAIN APPLICATION:
IMPLEMENT**



AW 702

AW 702 has been developed for implement machinery and trailers in soil tillage and transport applications. This heavy-duty tire has been designed by BKT to provide a new level of durability. AW 702 is available in different versions to meet specific end-user needs.



CUT & CHIP RESISTANCE



DURABILITY



HEAVY DUTY SERVICE



FREE ROLLING APPLICATION



HIGH PUNCTURE RESISTANCE

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.										↓	
15.3" 11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	14	TL	139 A8	-	bar	4.75
												km/h	2720
												30 FR	2430
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	14	TT	139 A8	-	bar	4.75
												km/h	2720
												30 FR	2430
11.5/80 - 15.3	9.00	-	297	844	370	2473	AB	14	TL	139 A8	-	bar	4.75
												km/h	2720
												30 FR	2430
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	16	TT	141 A8	-	bar	5.40
												km/h	2885
												30 FR	2575
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	16	TL	141 A8	-	bar	5.40
												km/h	2885
												30 FR	2575
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	18	TT	143 A8	-	bar	5.40
												km/h	3050
												30 FR	2725
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	18	TL	143 A8	-	bar	5.40
												km/h	3050
												30 FR	2725
12.5/80 - 15.3	9.00	-	312	885	387	2593	STD	14	TT	142 A8	-	bar	4.30
												km/h	2970
												30 FR	2650
12.5/80 - 15.3	9.00	-	312	885	387	2593	STD	14	TL	142 A8	-	bar	4.30
												km/h	2970
												30 FR	2650
12.5/80 - 15.3	9.00	-	312	885	387	2593	SPL	14	TT	142 A8	-	bar	4.30
												km/h	2970
												30 FR	2650
12.5/80 - 15.3	9.00	-	312	885	387	2593	STD	16	TT	144 A8	-	bar	4.90
												km/h	3135
												30 FR	2800
12.5/80 - 15.3	9.00	-	312	885	387	2593	SPL	18	TL	146 A8	-	bar	5.50
												km/h	3360
												30 FR	3000

STD: Standard
AB: Aramid Belted
SPL: Special

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



**MAIN APPLICATION:
IMPLEMENT**



AW 702

AW 702 has been developed for implement machinery and trailers in soil tillage and transport applications. This heavy-duty tire has been designed by BKT to provide a new level of durability. AW 702 is available in different versions to meet specific end-user needs.



16"

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.										↓	
6.00 - 16	4.00 E	4.50 E; 4½ K	169	722	337	2150	STD	6	TT	95 A8	-	bar	2.75
												km/h	775
												30 FR	690
6.00 - 16	4.00 E	4.50 E; 4½ K	169	722	337	2150	STD	6	TL	95 A8	-	bar	2.75
												km/h	775
												40 FR	690
6.00 - 16	4.00 E	4.50 E; 4½ K	169	722	337	2150	STD	8	TT	103 A8	-	bar	4.00
												km/h	980
												40 FR	875
10.50 - 16	6.00 T	-	305	975	445	2986	STD	14	TT	-	-	bar	6.90
												km/h	3215
												50	
10.5/65 - 16	W 9	W 8; W 8 L	274	755	343	2112	STD	10	TT	123 A8	-	bar	3.80
												km/h	1735
												40 FR	1550
10.5/65 - 16	W 9	W 8; W 8 L	274	755	343	2112	STD	10	TL	123 A8	-	bar	3.80
												km/h	1735
												40 FR	1550
10.5/65 - 16	W 9	W 8; W 8 L	274	755	343	2112	SPL	10	TL	123 A8	-	bar	3.80
												km/h	1735
												40 FR	1550
10.5/65 - 16	W 9	W 8; W 8 L	274	755	343	2112	STD	14	TT	130 A8	-	bar	5.30
												km/h	2130
												40 FR	1900
10.5/65 - 16	W 9	W 8; W 8 L	274	755	343	2112	STD	14	TL	130 A8	-	bar	5.30
												km/h	2130
												40 FR	1900
10.5/65 - 16	W 9	W 8; W 8 L	274	755	343	2112	IND	14	TL	130 A8	-	bar	5.30
												km/h	2130
												40 FR	1900
13.0/55 - 16	11.0	-	336	770	345	2256	STD	12	TL	130 A8	-	bar	3.60
												km/h	2130
												40 FR	1900

STD: Standard
IND: Industrial
SPL: Special



**MAIN APPLICATION:
IMPLEMENT**



AW 702

AW 702 has been developed for implement machinery and trailers in soil tillage and transport applications. This heavy-duty tire has been designed by BKT to provide a new level of durability. AW 702 is available in different versions to meet specific end-user needs.



CUT & CHIP RESISTANCE



DURABILITY



HEAVY DUTY SERVICE



FREE ROLLING APPLICATION



HIGH PUNCTURE RESISTANCE

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.										bar	km/h	
16"	13.0/55 - 16	11.0	-	336	770	345	2256	STD	14	TL	133 A8	-	bar	4.20
													km/h	2305
													30 FR	2060
	13.0/55 - 16	11.0	-	336	770	345	2256	STD	18	TL	138 A8	-	bar	5.40
													km/h	2645
													30 FR	2360
	13.0/75 - 16	11.0	9; W 9; W 11	340	890	396	2726	STD	10	TL	135 A8	-	bar	3.00
													km/h	2440
													30 FR	2180
18"	10.5/80 - 18	W 9	W 8 ; 9	275	885	395	2593	STD	10	TL	131 A8	-	bar	3.70
													km/h	2185
													30 FR	1950
	10.5/80 - 18	W 9	W 8 ; 9	275	885	395	2593	STD	14	TL	138 A8	-	bar	5.10
													km/h	2645
													30 FR	2360
	12.5/80 - 18	W 9	11	308	965	432	2827	STD	10	TL	139 A8	-	bar	3.10
													km/h	2720
													30 FR	2430
	12.5/80 - 18	W 9	11	308	965	432	2827	STD	12	TL	142 A8	-	bar	3.70
													km/h	2970
													30 FR	2650
	12.5/80 - 18	W 9	11	308	965	432	2827	STD	14	TL	145 A8	-	bar	4.30
													km/h	3250
													30 FR	2900
	12.5/80 - 18	W 9	11	308	965	432	2827	SPL	14	TL	145 A8	-	bar	4.30
													km/h	3250
													30 FR	2900

STD: Standard
SPL: Special



**MAIN APPLICATION:
IMPLEMENT**



AW 702

AW 702 has been developed for implement machinery and trailers in soil tillage and transport applications. This heavy-duty tire has been designed by BKT to provide a new level of durability. AW 702 is available in different versions to meet specific end-user needs.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.										↓		
18" 12.5/80 - 18	W 9	11	308	965	432	2827	STD	16	TL	148 A8	-	bar	4.90	
												km/h	30 FR	3530
												40 FR	3150	
												bar	4.90	
12.5/80 - 18	W 9	11	308	965	432	2827	SPL	16	TL	148 A8	-	bar	4.90	
												km/h	30 FR	3530
												40 FR	3150	
												bar	5.50	
12.5/80 - 18	W 9	11	308	965	432	2827	STD	18	TL	150 A8	-	bar	5.50	
												km/h	30 FR	3750
												40 FR	3350	
												bar	4.30	
13.0/65 - 18	11.0	-	336	890	398	2608	STD	14	TT	141 A8	-	bar	4.30	
												km/h	30 FR	2885
												40 FR	2575	
												bar	4.30	
13.0/65 - 18	11.0	-	336	890	398	2608	STD	14	TL	141 A8	-	bar	4.30	
												km/h	30 FR	2885
												40 FR	2575	
												bar	4.90	
13.0/65 - 18	11.0	-	336	890	398	2608	STD	16	TL	144 A8	-	bar	4.90	
												km/h	30 FR	3135
												40 FR	2800	
												bar	3.40	
14.5/80 - 18	11.0	12; 13	362	1047	446	3068	STD	12	TT	155 A8	-	bar	3.40	
												km/h	30 FR	3640
												40 FR	3250	

STD: Standard
SPL: Special



**MAIN APPLICATION:
IMPLEMENT**



AW 705

AW 705 has been developed for implement machinery and trailers in soil tillage and transport applications. It is ideal for modern farming both on and off the road. AW 705 is available also in a “special” version, which offers improved durability.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.										bar	km/h	
16"	14.0/65 - 16	11.0	-	353	870	388	2549	STD	10	TT	134 A8	-	bar	2.80
													km/h	2375
													30 FR	2120
	14.0/65 - 16	11.0	-	353	870	388	2549	STD	10	TL	134 A8	-	bar	2.80
													km/h	2375
													30 FR	2120
	14.0/65 - 16	11.0	-	353	870	388	2549	STD	14	TT	142 A8	-	bar	4.00
													km/h	2970
													30 FR	2650
	14.0/65 - 16	11.0	-	353	870	388	2549	STD	14	TL	142 A8	-	bar	4.00
													km/h	2970
													30 FR	2650
17"	15.0/55 - 17	13.00	13; W 13	391	850	377	2490	STD	10	TL	134 A8	-	bar	2.60
													km/h	2375
													30 FR	2120
	15.0/55 - 17	13.00	13; W 13	391	850	377	2490	SPL	10	TL	134 A8	-	bar	2.60
													km/h	2375
													30 FR	2120
	15.0/55 - 17	13.00	13; W 13	391	850	377	2490	STD	12	TL	138 A8	-	bar	3.10
													km/h	2645
													30 FR	2360
	15.0/55 - 17	13.00	13; W 13	391	850	377	2490	STD	14	TL	141 A8	-	bar	3.70
													km/h	2885
													30 FR	2575
15.0/55 - 17	13.00	13; W 13	391	850	377	2490	STD	18	TL	146 A8	-	bar	4.70	
												km/h	3360	
												30 FR	3000	

STD: Standard
SPL: Special



**MAIN APPLICATION:
IMPLEMENT**



AW 705

AW 705 has been developed for implement machinery and trailers in soil tillage and transport applications. It is ideal for modern farming both on and off the road. AW 705 is available also in a "special" version, which offers improved durability.



FREE ROLLING
APPLICATION

DURABILITY

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)			
	Rec.	Alt.										↓			
18"	15.0/70 - 18	13.00	13;W 13	391	990	442	2901	STD	12	TL	145 A8	-	bar	3.10	
													km/h	3250	
													30 FR	2900	
	15.0/70 - 18	13.00	13;W 13	391	990	442	2901	STD	14	TL	148 A8	-	bar	3.60	
													km/h	3530	
													40 FR	3150	
	15.0/70 - 18	13.00	13;W 13	391	990	442	2901	STD	16	TL	151 A8	-	bar	4.25	
													km/h	3865	
													40 FR	3450	
20"	16.0/70 - 20	13.0	12 SDC; 13 SDC; 14	408	1075	480	3155	STD	12	TT	151 A8	-	bar	3.00	
													km/h	3865	
													40 FR	3450	
	16.0/70 - 20	13.0	12 SDC; 13 SDC; 14	408	1075	480	3155	STD	12	TL	151 A8	-	bar	3.00	
													km/h	3865	
													40 FR	3450	
	16.0/70 - 20	13.0	12 SDC; 13 SDC; 14	408	1075	480	3155	STD	14	TT	154 A8	-	bar	3.50	
													km/h	4200	
													40 FR	3750	
	16.0/70 - 20	13.0	12 SDC; 13 SDC; 14	408	1075	480	3155	STD	14	TL	154 A8	-	bar	3.50	
													km/h	4200	
													40 FR	3750	
	16.0/70 - 20	13.0	12 SDC; 13 SDC; 14	408	1075	480	3155	SPL	14	TL	154 A8	-	bar	3.50	
													km/h	4200	
													40 FR	3750	
	16.0/70 - 20	13.0	12 SDC; 13 SDC; 14	408	1075	480	3155	STD	16	TL	156 A8	-	bar	4.00	
													km/h	4480	
													40 FR	4000	
22.5"	400/55 - 22.5	AG 11.75	12.25; AG 13.00	405	1016	443	3072	STD	18	TL	154 A8	-	bar	4.50	
													km/h	4200	
													30 FR	4200	
													40 FR	3750	

STD: Standard
SPL: Special



**MAIN APPLICATION:
IMPLEMENT**



AW 708

AW 708 has been developed for soil tillage, transport and hay harvesting applications with implement machinery, trailers and hay harvesters/balers. It is ideal for modern farming both on and off the road.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.										↓	
15.5" 400/60 - 15.5	AG 13.00	-	405	875	380	2564	STD	10	TL	136 A8	-	bar	2.50
												km/h	2510
												30 FR	2240
400/60 - 15.5	AG 13.00	-	405	875	380	2564	STD	14	TT	145 A8	-	bar	3.60
												km/h	3250
												30 FR	2900
400/60 - 15.5	AG 13.00	-	405	875	380	2564	STD	14	TL	145 A8	-	bar	3.60
												km/h	3250
												30 FR	2900
400/60 - 15.5	AG 13.00	-	405	875	380	2564	STD	18	TL	149 A8	-	bar	4.50
												km/h	3640
												30 FR	3250
400/60 - 15.5	AG 13.00	-	405	875	380	2564	HD	18	TL	149 A8	-	bar	4.50
												km/h	3640
												30 FR	3250
400/60 - 15.5	AG 13.00	-	405	875	380	2564	SPL	18	TL	149 A8	-	bar	4.50
												km/h	3640
												30 FR	3250

STD: Standard
HD: Heavy Duty
SPL: Special



MAIN APPLICATION:
IMPLEMENT



AW 708

AW 708 has been developed for soil tillage, transport and hay harvesting applications with implement machinery, trailers and hay harvesters/balers. It is ideal for modern farming both on and off the road.



17"

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.										↓	
19.0/45 - 17	16.00	-	491	866	380	2536	STD	10	TL	138 A8	-	bar	2.25
												km/h	2645
												30 FR	2360
												40 FR	2360
19.0/45 - 17	16.00	-	491	866	380	2536	STD	14	TL	144 A8	-	bar	2.80
												km/h	3135
												30 FR	2800
												40 FR	2800
19.0/45 - 17	16.00	-	491	866	380	2536	STD	18	TL	148 A8	-	bar	3.30
												km/h	3530
												30 FR	3150
												40 FR	3150
19.0/45 - 17	16.00	-	491	866	380	2536	SR	22	TL	152 A8	-	bar	3.90
												km/h	3975
												30 FR	3550
												40 FR	3550

STD: Standard
SR: Stubble Resistant



MAIN APPLICATION:
IMPLEMENT



AW 708

AW 708 has been developed for soil tillage, transport and hay harvesting applications with implement machinery, trailers and hay harvesters/balers. It is ideal for modern farming both on and off the road.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.										↓	
17" 500/50 - 17	16.00	-	500	945	416	2750	STD	10	TL	140 A8	-	bar	2.00
												km/h	2800
												30 FR	2500
												40 FR	2500
500/50 - 17	16.00	-	500	945	416	2750	STD	14	TL	149 A8	-	bar	2.80
												km/h	3640
												30 FR	3250
												40 FR	3250
500/50 - 17	16.00	-	500	945	416	2750	STD	16	TL	152 A8	-	bar	3.20
												km/h	3975
												30 FR	3550
												40 FR	3550
500/50 - 17	16.00	-	500	945	416	2750	STD	18	TL	154 A8	-	bar	3.60
												km/h	4200
												30 FR	3750
												40 FR	3750
500/65 - 17	16.0	-	520	1070	462	3135	STD	18	TL	160 A8	-	bar	3.50
												km/h	5040
												30 FR	4500
												40 FR	4500

STD: Standard



**MAIN APPLICATION:
IMPLEMENT**



AW 726

AW 726 has been specially designed for trailers and hay harvesters/balers in transport and soil tillage operations. It is best suited for both on-and-off-the-road usage. AW 726 shows excellent road performance, driving comfort and self-cleaning features. The low rolling resistance contributes to better fuel economy.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.										↓	
15.3" 11.5/80 - 15.3	9.00	-	300	855	-	-	STD	14	TL	139 A8	126 A8	bar	4.80
												km/h	
												30 FR	2720
												40 FR	2430
												30 DW	1905
												40 DW	1700
15.5" 400/60 - 15.5	AG 13.00	-	400	875	-	-	STD	18	TL	149 A8	137 A8	bar	4.50
												km/h	
												30 FR	3640
												40 FR	3250
												30 DW	2575
												40 DW	2300

STD: Standard



**MAIN APPLICATION:
IMPLEMENT**



AW 909

AW 909 has been developed for soil tillage and transport applications with implement machinery and trailers. It is ideal for modern farming both on and off the road. Besides, it provides a high level of handling comfort.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.										bar	↓	
12"	10.0/80 - 12	9.00	7.0	264	710	313	2080	STD	8	TL	116 A8	-	bar	3.10
													km/h	1400
													30 FR	1250
10.0/80 - 12	9.00	7.0	264	710	313	2080	STD	10	TL	121 A8	-	bar	3.90	
												km/h	1625	
												30 FR	1450	
15.3"	10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	10	TL	123 A8	-	bar	3.90
													km/h	1735
													30 FR	1550
10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	12	TL	126 A8	-	bar	4.70	
												km/h	1905	
												30 FR	1700	
10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	14	TL	130 A8	-	bar	5.50	
												km/h	2130	
												30 FR	1900	
10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	18	TL	135 A8	-	bar	7.10	
												km/h	2440	
												30 FR	2180	
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	10	TL	131 A8	-	bar	3.40	
												km/h	2185	
												30 FR	1950	
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	12	TL	135 A8	-	bar	4.10	
												km/h	2440	
												30 FR	2180	
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	14	TL	139 A8	-	bar	4.75	
												km/h	2720	
												30 FR	2430	
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	16	TT	141 A8	-	bar	5.40	
												km/h	2885	
												30 FR	2575	

STD: Standard



MAIN APPLICATION:
IMPLEMENT



AW 909

AW 909 has been developed for soil tillage and transport applications with implement machinery and trailers. It is ideal for modern farming both on and off the road. Besides, it provides a high level of handling comfort.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.										↓		
15.3"	11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	16	TL	141 A8	-	bar	5.40
													km/h	2885
													40 FR	2575
	11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	18	TL	143 A8	-	bar	6.10
													km/h	3050
													40 FR	2725
	12.5/80 - 15.3	9.00	-	312	885	387	2593	STD	14	TL	142 A8	-	bar	4.30
													km/h	2970
													40 FR	2650
17"	15.0/55 - 17	13.00	13	391	850	377	2490	STD	10	TL	134 A8	-	bar	2.60
													km/h	2375
													40 FR	2120
	15.0/55 - 17	13.00	13	391	850	377	2490	STD	12	TL	138 A8	-	bar	3.10
													km/h	2645
													40 FR	2360
	15.0/55 - 17	13.00	13	391	850	377	2490	STD	14	TL	141 A8	-	bar	3.70
													km/h	2885
													40 FR	2575

STD: Standard



**MAIN APPLICATION:
IMPLEMENT**



AW 09

AW 09 has been developed for soil tillage and transport applications with implement machinery and trailers. It is ideal for modern farming both on and off the road. AW 09 is the right tire to be used in all operating conditions which require excellent handling features.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.										bar	km/h
153" 260/70 - 15.3	9.00	-	268	753	335	2206	STD	-	TL	122 A8	110 A8	bar	3.20
												km/h	1680
												30 FR	1500
												30 DW	1185
												40 DW	1060
260/70 - 15.3	9.00	-	268	753	335	2206	STD	-	TL	126 A8	114 A8	bar	3.60
												km/h	1905
												30 FR	1700
												30 DW	1320
												40 DW	1180
260/70 - 15.3	9.00	-	268	753	335	2206	STD	-	TL	131 A8	119 A8	bar	5.00
												km/h	2185
												30 FR	1950
												30 DW	1525
												40 DW	1360
300/80 - 15.3	9.00	-	295	860	376	2520	STD	-	TL	132 A8	120 A8	bar	2.80
												km/h	2240
												30 FR	2000
												30 DW	1570
												40 DW	1400
300/80 - 15.3	9.00	-	295	860	376	2520	STD	-	TL	138 A8	126 A8	bar	3.60
												km/h	2645
												30 FR	2360
												30 DW	1905
												40 DW	1700
300/80 - 15.3	9.00	-	295	860	376	2520	STD	-	TL	141 A8	129 A8	bar	4.00
												km/h	2885
												30 FR	2575
												30 DW	2070
												40 DW	1850
320/80 - 15.3	9.00	-	309	901	392	2640	STD	-	TL	145 A8	133 A8	bar	4.00
												km/h	3250
												30 FR	2900
												30 DW	2305
												40 DW	2060

STD: Standard



**MAIN APPLICATION:
IMPLEMENT**



AW 09

AW 09 has been developed for soil tillage and transport applications with implement machinery and trailers. It is ideal for modern farming both on and off the road. AW 09 is the right tire to be used in all operating conditions which require excellent handling features.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.										bar	max load (kg)
15.5" 400/60 - 15.5	AG 13.00	-	404	874	382	2561	STD	-	TL	145 A8	132 A8	bar	3.60
												km/h	
												30 FR	3250
												40 FR	2900
												30 DW	2240
40 DW	2000												
17" 380/55 - 17	13.00	-	390	850	377	2491	STD	-	TL	138 A8	125 A8	bar	2.80
												km/h	
												30 FR	2645
												40 FR	2360
												30 DW	1850
40 DW	1650												
380/55 - 17	13.00	-	390	850	377	2491	STD	-	TL	141 A8	128 A8	bar	3.20
												km/h	
												30 FR	2885
												40 FR	2575
												30 DW	2015
40 DW	1800												

STD: Standard



BK 4040

BK 4040 is specifically designed for agricultural implements and trailers. Its aggressive lug pattern provides excellent traction. The strong casing ensures best wear resistance. BK 4040 features a wide contact patch providing outstanding grip and stability.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.										bar	max load (kg)
16" 6.50 - 16	4.50 E	-	182	740	-	-	STD	10	TT	-	-	bar	4.10
												max load (kg)	1010
7.00 - 16	5.50	5.00 F	198	770	-	-	STD	12	TT	-	-	4.70	1335

STD: Standard



MAIN APPLICATION:
IMPLEMENT



RIB IMPLEMENT (A)

RIB IMPLEMENT (A) has been engineered for trailers and implement machinery in transport and soil tillage applications. It is ideal for modern farming and shows top performance both on and off the road. RIB IMPLEMENT (A) is the right choice for all operating conditions which require a high level of handling as well as reduced soil compaction to preserve the crops.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.										bar	km/h
12" 10.0/80 - 12	9.00	7.0	264	746	329	2186	STD	6	TL	110 A8	-	2.30	1185
												40 FR	1060

STD: Standard



RIB IMPLEMENT (B)

RIB IMPLEMENT (B) has been specially designed for agricultural implements. This ideal tire for modern farming is made of a stubble-resistant compound providing excellent puncture protection. RIB IMPLEMENT (B) is a 5-rib tread pattern tire featuring a strong casing for a longer service life. It is the right choice for all operating conditions, which require high load capacity along with low rolling resistance.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.										bar	km/h
17" 49 - 17	13.0	14.0	425	1200	-	-	STD	20	TL	158 A8/154 B	146 A8/143 B	4.0	4250
												50 FR	3750
												40 DW	3000
												50 DW	2725

STD: Standard



**MAIN APPLICATION:
IMPLEMENT**



RIB 713 (I-1)

RIB 713 is a steel-belted tire for agricultural implements. As a response to the increasing awareness of low soil compaction in modern farming, RIB 713 has been designed with IF technology. This enables the tire to carry heavier loads at lower inflation pressures and provides a larger footprint with uniform weight distribution. The steel-belted structure provides excellent puncture resistance and hence increased protection against stub penetration and relative damages, even if running into strong stubble. In addition, "D" speed rating (65 km/h – 40 mph) allows for fast road transfers. RIB 713 is BKT's contribution to maximize both the productivity and efficiency of your farming business.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)														
		Rec. 	Alt. 																					
15" IF 240/80 R 15	129 D	W 8	-	240	765	354	2324	360	SR	bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	5.0				
										km/h														
										From 10 to 65	540	685	835	945	1095	1240	1370	1500	1650	1850				
IF 265/85 R 15 (10.5L R15)	121 D	W 8	-	260	831	368	2502	-	SR	bar	0.8	1.2	1.6	2.0	2.4									
										km/h														
										From 10 to 65	700	900	1105	1265	1450									
IF 280/70 R 15	128 D	W 8	-	279	779	347	2356	360	SR	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2	3.6			
										km/h														
										From 10 to 65	670	775	885	1010	1120	1225	1335	1425	1570	1695	1800			
IF 320/70 R 15	146 D	W10	-	320	823	367	2590	-	SR	bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	5.0	5.2			
										km/h														
										From 10 to 65	855	1090	1325	1500	1735	1970	2175	2380	2615	2935	3000			

SR: Stubble Resistant



MAIN APPLICATION:
IMPLEMENT



RIB 774 (A)

RIB 774 (A) is a low section implement tire offering high load capacity with minimum soil compaction. It is ideal for modern farming and suitable for on- and off-the-road applications.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.										↓	
17" 15.0/55 - 17	13.00	13	391	850	377	2490	STD	10	TL	134 A8	-	bar	2.60
												km/h	2375
												30 FR	2120
15.0/55 - 17	13.00	13	391	850	377	2490	STD	14	TL	141 A8	-	bar	3.70
												km/h	2885
												40 FR	2575

STD: Standard



MAIN APPLICATION:
IMPLEMENT



RIB 774 (B)

RIB 774 (B) is a low section implement tire. It is ideal for modern farming and suitable for on- and off-the-road applications.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.										↓		
14.5"	200/60 - 14.5	6.75	4.50 E; 5.50 F	210	610	278	1785	STD	10	TT	106 A8	-	bar	5.00
													km/h	1065
													30 FR	950
	200/60 - 14.5	6.75	4.50 E; 5.50 F	210	610	278	1785	STD	10	TL	106 A8	-	bar	5.00
													km/h	1065
													30 FR	950
200/60 - 14.5	6.75	4.50 E; 5.50 F	210	610	278	1785	HD	10	TT	106 A8	-	bar	5.00	
												km/h	1065	
												30 FR	950	
200/60 - 14.5	6.75	4.50 E; 5.50 F	210	610	278	1785	STD	14	TT	113 A8	-	bar	7.00	
												km/h	1290	
												30 FR	1150	
200/60 - 14.5	6.75	4.50 E; 5.50 F	210	610	278	1785	STD	14	TL	113 A8	-	bar	7.00	
												km/h	1290	
												30 FR	1150	
250/65 - 14.5	AG 8.00	6.75	255	675	303	1978	STD	12	TL	119 A8	-	bar	4.70	
												km/h	1525	
												30 FR	1360	
250/65 - 14.5	AG 8.00	6.75	255	675	303	1978	STD	14	TL	124 A8	-	bar	5.50	
												km/h	1790	
												30 FR	1600	
16"	10.5/65 - 16	W 9	W 8 L	265	745	339	2183	STD	14	TT	130 A8	-	bar	5.30
													km/h	2130
													30 FR	1900
10.5/65 - 16	W 9	W 8 L	265	745	339	2183	IND	14	TT	130 A8	-	bar	5.30	
												km/h	2130	
												30 FR	1900	
18"	12.0 - 18 (340/70 - 18)	11.0	-	342	902	414	2688	STD	16	TL	150 A8	-	bar	5.20
													km/h	3750
													30 FR	3350

STD: Standard
IND: Industrial
HD: Heavy Duty



MAIN APPLICATION:
IMPLEMENT



RIB 774 (C)

RIB 774 (C) is a low section and narrow width implement tire. It is ideal for modern farming and suitable for on- and off-the-road applications.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.										↓		
17"	19.0/45 - 17	16.00	-	455	845	387	2518	STD	10	TL	138 A8	-	bar	2.25
													km/h	2645
													30 FR	2645
													40 FR	2360
17.5"	215/75 - 17.5	6.75	-	220	775	360	2310	STD	12	TL	134 A8	-	bar	6.90
													km/h	2375
													30 FR	2375
													40 FR	2120
	215/75 - 17.5	6.75	-	220	775	360	2310	STD	16	TL	139 A8	-	bar	9.00
													km/h	2970
													30 FR	2970
													40 FR	2650
	225/75 - 17.5	6.75	-	220	775	360	2310	STD	12	TL	134 A8	-	bar	6.90
													km/h	2375
													30 FR	2375
													40 FR	2120
	225/75 - 17.5	6.75	-	220	775	360	2310	STD	16	TL	139 A8	-	bar	9.00
													km/h	2970
													30 FR	2970
													40 FR	2650

STD: Standard



MAIN APPLICATION:
IMPLEMENT



RIB 775

RIB 775 is a low-section cross-ply tire for transport and soil tillage applications with trailers and implement machinery. It offers excellent handling as well as reduced soil compaction.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.										↓	
12" 300/65 - 12	9.0	-	305	685	304	2007	STD	8	TL	116A8	-	bar	2.60
												km/h	1400
												30 FR	1250
												40 FR	

STD: Standard



RIB 900

RIB 900 is suitable for transport, soil tillage and hay harvesting operations with trailers, implement machinery and hay harvesters/balers. It offers excellent handling as well as reduced soil compaction.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.										↓	
15.5" 400/60 - 15.5	AG 13.00	-	405	875	380	2564	STD	10	TL	139A8	-	bar	2.50
												km/h	2510
												30 FR	2240
												40 FR	
400/60 - 15.5	AG 13.00	-	405	875	380	2564	STD	14	TL	145A8	-	bar	3.60
												km/h	3250
												30 FR	2900
												40 FR	
400/60 - 15.5	AG 13.00	-	405	875	380	2564	STD	16	TL	147A8	-	bar	4.00
												km/h	3445
												30 FR	3075
												40 FR	

STD: Standard



MAIN APPLICATION:
IMPLEMENT



RIB MASTER

RIB MASTER is suitable for transport and soil tillage operations with trailers and implement machinery. This tire is ideal in all operating conditions that require excellent handling.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.										↓	
17.5" 215/75 - 17.5	6.75	-	220	775	360	2310	STD	16	TL	142 A8	-	bar	9.00
												km/h	2970
												40 FR	2650

STD: Standard



FLOTATION RIB IMPLEMENT

FLOTATION RIB IMPLEMENT is a rib pattern tire for trailers in transport applications. It features high flotation capability and ensures significant fuel savings to boost the productivity of your business.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.										↓	
15" 31 X 13.50 - 15	10 LB	-	360	780	359	2129	STD	12	TL	-	-	bar	5.20
												km/h	1600
												50	

STD: Standard



MAIN APPLICATION:
IMPLEMENT



MULTI RIB

MULTI RIB is an agro-industrial tire for soil tillage and transport applications with 2WD tractors, trailers, and implement machinery. It offers excellent handling throughout its long product life-cycle.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY 40 KM/H	
	Rec.	Alt.										↓	
												bar	max load (kg)
16" 11.00 - 16	W10 L	W 8; W 8 L	315	930	-	-	STD	12	TL	-	-	4.10	1550
11.00 - 16	W10 L	W 8; W 8 L	315	930	-	-	AB HD	12	TL	-	-	4.10	1550

STD: Standard
AB HD: Aramid Belted Heavy Duty



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.										↓	
												bar	kg
12" 6.5/80 - 12	5 J	5 JA	163	588	273	1743	STD	4	TT	84 A8	72 A8	bar	2.40
												km/h	
												30 FR	560
												40 FR	500
												30 DW	400
40 DW	355												
6.5/80 - 12	5 J	5 JA	163	588	273	1743	STD	4	TL	84 A8	72 A8	bar	2.40
												km/h	
												30 FR	560
												40 FR	500
												30 DW	400
40 DW	355												
6.5/80 - 12	5 J	5 JA	163	588	273	1743	STD	6	TT	93 A8	80 A8	bar	3.60
												km/h	
												30 FR	730
												40 FR	650
												30 DW	505
40 DW	450												

STD: Standard



**MAIN APPLICATION:
IMPLEMENT**



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



12"

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.										↓	
6.5/80 - 12	5 J	5 JA	163	588	273	1743	STD	6	TL	93 A8	80 A8	bar	3.60
												km/h	
												30 FR	730
												40 FR	650
												30 DW	505
												40 DW	450
6.5/80 - 12	5 J	5 JA	163	588	273	1743	HD	6	TT	93 A8	80 A8	bar	3.60
												km/h	
												30 FR	730
												40 FR	650
												30 DW	505
												40 DW	450
7.00 - 12	4.5	-	187	683	300	2001	STD	4	TT	88 A8	75 A8	bar	1.70
												km/h	
												30 FR	625
												40 FR	560
												30 DW	430
												40 DW	385
7.00 - 12	4.5	-	187	683	300	2001	STD	4	TL	88 A8	75 A8	bar	1.70
												km/h	
												30 FR	625
												40 FR	560
												30 DW	430
												40 DW	385
7.00 - 12	4.5	-	187	683	300	2001	STD	6	TL	95 A8	83 A8	bar	2.50
												km/h	
												30 FR	775
												40 FR	690
												30 DW	545
												40 DW	485
7.00 - 12	4.5	-	187	683	300	2001	AB	8	TL	100 A8	88 A8	bar	3.30
												km/h	
												30 FR	895
												40 FR	800
												30 DW	625
												40 DW	560
7.00 - 12	4.5	-	187	683	300	2001	SPL	8	TL	100 A8	88 A8	bar	3.30
												km/h	
												30 FR	895
												40 FR	800
												30 DW	625
												40 DW	560

STD: Standard
 HD: Heavy Duty
 AB: Aramid Belted
 SPL: Special



**MAIN APPLICATION:
IMPLEMENT**



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.										↓	↓	
12"	11.0/65 - 12	9.00	-	273	700	321	2072	STD	8	TT	114 A8	101 A8	bar	2.90
													km/h	
													30 FR	1320
													40 FR	1180
													30 DW	925
													40 DW	825
12"	11.0/65 - 12	9.00	-	273	700	321	2072	STD	8	TL	114 A8	101 A8	bar	2.90
													km/h	
													30 FR	1320
													40 FR	1180
													30 DW	925
													40 DW	825
15"	5.00 - 15	3.50 D	3.00 D; 4.00 E; 4 J	140	657	308	1957	STD	4	TT	79 A8	67 A8	bar	2.30
													km/h	
													30 FR	485
													40 FR	435
													30 DW	340
													40 DW	305
15"	5.00 - 15	3.50 D	3.00 D; 4.00 E; 4 J	140	657	308	1957	STD	6	TT	88 A8	75 A8	bar	3.50
													km/h	
													30 FR	625
													40 FR	560
													30 DW	430
													40 DW	385
15"	5.00 - 15	3.50 D	3.00 D; 4.00 E; 4 J	140	657	308	1957	STD	6	TL	88 A8	75 A8	bar	3.50
													km/h	
													30 FR	625
													40 FR	560
													30 DW	430
													40 DW	385
15"	7.5L - 15	6 LB	5 K; 5½ J; 5½ K	210	765	354	2280	STD	6	TT	109 A8	97 A8	bar	3.10
													km/h	
													30 FR	1155
													40 FR	1030
													30 DW	820
													40 DW	730
15"	7.5L - 15	6 LB	5 K; 5½ J; 5½ K	210	765	354	2280	STD	8	TT	113 A8	100 A8	bar	3.70
													km/h	
													30 FR	1290
													40 FR	1150
													30 DW	895
													40 DW	800
15"	7.5L - 15	6 LB	5 K; 5½ J; 5½ K	210	765	354	2280	STD	8	TL	113 A8	100 A8	bar	3.70
													km/h	
													30 FR	1290
													40 FR	1150
													30 DW	895
													40 DW	800

STD: Standard



**MAIN APPLICATION:
IMPLEMENT**



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.										↓		
15"	7.5L - 15	6 LB	5 K; 5½ J; 5½ K	210	765	354	2280	AB HD	8	TL	113 A8	100 A8	bar	3.70
													km/h	
													30 FR	1290
													40 FR	1150
													30 DW	895
													40 DW	800
7.5L - 15	6 LB	5 K; 5½ J; 5½ K	210	765	354	2280	HD	8	TT	113 A8	100 A8	bar	3.70	
												km/h		
												30 FR	1290	
												40 FR	1150	
												30 DW	895	
												40 DW	800	
15.3"	10.0/75 - 15.3	9.00	-	264	780	345	2285	STD	8	TT	119 A8	106 A8	bar	3.10
													km/h	
													30 FR	1525
													40 FR	1360
													30 DW	1065
													40 DW	950
10.0/75 - 15.3	9.00	-	264	780	345	2285	STD	8	TL	119 A8	106 A8	bar	3.10	
												km/h		
												30 FR	1525	
												40 FR	1360	
												30 DW	1065	
												40 DW	950	
10.0/75 - 15.3	9.00	-	264	780	345	2285	IND	8	TL	119 A8	106 A8	bar	3.10	
												km/h		
												30 FR	1525	
												40 FR	1360	
												30 DW	1065	
												40 DW	950	
10.0/75 - 15.3	9.00	-	264	780	345	2285	STD	10	TL	123 A8	111 A8	bar	3.90	
												km/h		
												30 FR	1735	
												40 FR	1550	
												30 DW	1220	
												40 DW	1090	
10.0/75 - 15.3	9.00	-	264	780	345	2285	STD	14	TL	130 A8	118 A8	bar	5.50	
												km/h		
												30 FR	2130	
												40 FR	1900	
												30 DW	1480	
												40 DW	1320	
10.0/75 - 15.3	9.00	-	264	780	345	2285	STD	18	TT	135 A8	122 A8	bar	7.10	
												km/h		
												30 FR	2440	
												40 FR	2180	
												30 DW	1680	
												40 DW	1500	

STD: Standard HD: Heavy Duty IND: Industrial AB HD: Aramid Belted Heavy Duty

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
IMPLEMENT



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.										↓	↓
15.3" 10.0/75 - 15.3	9.00	-	264	780	345	2285	STD	18	TL	135 A8	122 A8	bar	7.10
												km/h	
												30 FR	2440
												40 FR	2180
												30 DW	1680
												40 DW	1500
11.5/80 - 15.3	9.00	-	290	867	380	2540	STD	8	TT	126 A8	114 A8	bar	2.70
												km/h	
												30 FR	1905
												40 FR	1700
												30 DW	1320
												40 DW	1180
11.5/80 - 15.3	9.00	-	290	867	380	2540	STD	8	TL	126 A8	114 A8	bar	2.70
												km/h	
												30 FR	1905
												40 FR	1700
												30 DW	1320
												40 DW	1180
11.5/80 - 15.3	9.00	-	290	867	380	2540	STD	10	TL	131 A8	119 A8	bar	3.40
												km/h	
												30 FR	2185
												40 FR	1950
												30 DW	1525
												40 DW	1360
11.5/80 - 15.3	9.00	-	290	867	380	2540	STD	12	TT	135 A8	123 A8	bar	4.10
												km/h	
												30 FR	2440
												40 FR	2180
												30 DW	1735
												40 DW	1550
11.5/80 - 15.3	9.00	-	290	867	380	2540	STD	12	TL	135 A8	123 A8	bar	4.10
												km/h	
												30 FR	2440
												40 FR	2180
												30 DW	1735
												40 DW	1550
11.5/80 - 15.3	9.00	-	290	867	380	2540	STD	14	TT	139 A8	126 A8	bar	4.80
												km/h	
												30 FR	2720
												40 FR	2430
												30 DW	1905
												40 DW	1700

STD: Standard



**MAIN APPLICATION:
IMPLEMENT**



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.										↓		
15.3"														
11.5/80 - 15.3	9.00	-	290	867	380	2540	STD	14	TL	139 A8	126 A8	bar	4.80	
												km/h		
												30 FR	2720	
												40 FR	2430	
												40 DW	1700	
27 X 10 - 15.3	9.00	-	260	695	317	2071	STD	8	TT	107 A8	95 A8	bar	3.10	
												km/h		
												30 FR	1090	
												40 FR	975	
												40 DW	690	
27 X 10 - 15.3	9.00	-	260	695	317	2071	STD	8	TL	107 A8	95 A8	bar	3.10	
												km/h		
												30 FR	1090	
												40 FR	975	
												40 DW	690	
16"														
6.00 - 16	4.00 E	4.50 E; 5.00 F; 4½ K	164	735	343	2190	STD	6	TT	95 A8	83 A8	bar	2.80	
												km/h		
												30 FR	775	
												40 FR	690	
												40 DW	485	
7.50 - 16	5.50 F	4.50 E; 5.00 F; 4.00 E; 5 K; 6 LB; 6.00 F	209	803	372	2393	STD	6	TT	104 A8	92 A8	bar	2.30	
												km/h		
												30 FR	1010	
												40 FR	900	
												40 DW	630	
7.50 - 16	5.50 F	4.50 E; 5.00 F; 4.00 E; 5 K; 6 LB; 6.00 F	209	803	372	2393	STD	8	TT	112 A8	99 A8	bar	3.20	
												km/h		
												30 FR	1255	
												40 FR	1120	
												40 DW	775	
7.50 - 16	5.50 F	4.50 E; 5.00 F; 4.00 E; 5 K; 6 LB; 6.00 F	209	803	372	2393	STD	8	TL	112 A8	99 A8	bar	3.20	
												km/h		
												30 FR	1255	
												40 FR	1120	
												40 DW	775	

STD: Standard



**MAIN APPLICATION:
IMPLEMENT**



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.										↓	↓	
16"	7.50 - 16	5.50 F	4.50 E; 5.00 F; 4.00 E; 5 K; 6 LB; 6.00 F	209	803	372	2393	HD	8	TT	112 A8	99 A8	bar	3.20
													km/h	
													30 FR	1255
													40 FR	1120
													30 DW	870
													40 DW	775
													16"	9.0/70 - 16
km/h														
30 FR	1525													
40 FR	1360													
30 DW	1065													
40 DW	950													
16"	270/75 - 16 (10.0/75 - 16)	9.00	-	250	810	-	-	STD	-	TL	123 A8	111 A8		
													km/h	
													30 FR	1735
													40 FR	1550
													30 DW	1220
													40 DW	1090
													17"	15.0/55 - 17
km/h														
30 FR	2375													
40 FR	2120													
30 DW	1680													
40 DW	1500													
17"	15.0/55 - 17	13.00	13	380	890	395	2608	STD	14	TL	141 A8	129 A8		
													km/h	
													30 FR	2885
													40 FR	2575
													30 DW	2070
													40 DW	1850
													17"	19.0/45 - 17
km/h														
30 FR	3135													
40 FR	2800													
30 DW	2185													
40 DW	1950													
17"	420/55 - 17	13.00	-	430	910	407	2712	STD	14	TL	142 A8	129 A8		
													km/h	
													30 FR	2970
													40 FR	2650
													30 DW	2070
													40 DW	1850
													17"	420/55 - 17
km/h														
30 FR	3250													
40 FR	2900													
30 DW	2305													
40 DW	2060													

HD: Heavy Duty
STD: Standard



**MAIN APPLICATION:
IMPLEMENT**



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.										↓	
18" 7.50 - 18	5.50 F	4.50 E; 6.00 F; 5.00 F	209	854	407	2649	STD	6	TT	106 A8	94 A8	bar	2.30
												km/h	
												30 FR	1065
												40 FR	950
												30 DW	750
												40 DW	670
7.50 - 18	5.50 F	4.50 E; 6.00 F; 5.00 F	209	854	407	2649	STD	8	TT	114 A8	101 A8	bar	3.10
												km/h	
												30 FR	1320
												40 FR	1180
												30 DW	925
												40 DW	825
10.5/80 - 18	W 9	9; W 8	274	907	405	2657	STD	10	TL	131 A8	119 A8	bar	3.70
												km/h	
												30 FR	2185
												40 FR	1950
												30 DW	1525
												40 DW	1360
12.5/80 - 18	W 9	9; 11	308	987	438	2892	STD	12	TL	142 A8	129 A8	bar	3.70
												km/h	
												30 FR	2970
												40 FR	2650
												30 DW	2070
												40 DW	1850
12.5/80 - 18	W 9	9; 11	308	987	438	2892	SPL	12	TL	142 A8	129 A8	bar	3.70
												km/h	
												30 FR	2970
												40 FR	2650
												30 DW	2070
												40 DW	1850
12.5/80 - 18	W 9	9; 11	308	987	438	2892	STD	16	TL	148 A8	135 A8	bar	4.90
												km/h	
												30 FR	3530
												40 FR	3150
												30 DW	2440
												40 DW	2180

STD: Standard
SPL: Special



**MAIN APPLICATION:
IMPLEMENT**



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.										↓	↓
18"	W 9	9; 11	308	987	438	2892	STD	18	TL	150 A8	138 A8	bar	5.50
												km/h	
												30 FR	3750
												40 FR	3350
												30 DW	2645
												40 DW	2360
20"	5.50 F	4.50 E; 6.00 F; 5.00 F	209	904	422	2695	STD	8	TT	116 A8	103 A8	bar	3.20
												km/h	
												30 FR	1400
												40 FR	1250
												30 DW	980
												40 DW	875
16.0/70 - 20	13	12 SDC; 14; 13 SDC	408	1097	487	3214	STD	10	TL	147 A8	135 A8	bar	2.50
												km/h	
												30 FR	3445
												40 FR	3075
												30 DW	2440
												40 DW	2180
16.0/70 - 20	13	12 SDC; 14; 13 SDC	408	1097	487	3214	STD	12	TL	151 A8	139 A8	bar	3.00
												km/h	
												30 FR	3865
												40 FR	3450
												30 DW	2720
												40 DW	2430
16.0/70 - 20	13	12 SDC; 14; 13 SDC	408	1097	487	3214	STD	14	TL	154 A8	142 A8	bar	3.50
												km/h	
												30 FR	4200
												40 FR	3750
												30 DW	2970
												40 DW	2650
16.0/70 - 20	13	12 SDC; 14; 13 SDC	408	1097	487	3214	STD	16	TL	156 A8	144 A8	bar	4.00
												km/h	
												30 FR	4480
												40 FR	4000
												30 DW	3135
												40 DW	2800
400/70 - 20	13	12 SDC; 14; 13 SDC	408	1097	487	3214	IND	-	TL	-	-	bar	4.00
												km/h	
												30	3380
												40	3250

STD: Standard
IND: Industrial



**MAIN APPLICATION:
IMPLEMENT**



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.										↓	
24" 15.5/80 - 24	W 12	W 13; W 14 L	384	1262	566	3655	STD	10	TL	154 A8	142 A8	bar	2.50
												km/h	
												30 FR	4200
												40 FR	3750
												30 DW	2970
												40 DW	2650
15.5/80 - 24	W 12	W 13; W 14 L	384	1262	566	3655	STD	12	TL	157 A8	145 A8	bar	3.00
												km/h	
												30 FR	4620
												40 FR	4125
												30 DW	3250
												40 DW	2900
15.5/80 - 24	W 12	W 13; W 14 L	384	1262	566	3655	STD	14	TL	160 A8	148 A8	bar	3.50
												km/h	
												30 FR	5040
												40 FR	4500
												30 DW	3530
												40 DW	3150
15.5/80 - 24	W 12	W 13; W 14 L	384	1262	566	3655	SPL	14	TL	160 A8	148 A8	bar	3.50
												km/h	
												30 FR	5040
												40 FR	4500
												30 DW	3530
												40 DW	3150
15.5/80 - 24	W 12	W 13; W 14 L	384	1262	566	3655	STD	16	TL	163 A8	151 A8	bar	4.00
												km/h	
												30 FR	5460
												40 FR	4875
												30 DW	3865
												40 DW	3450
16.5/85 - 24	W 13	W 14 L; W 15 L	415	1325	591	3837	STD	10	TL	158 A8	146 A8	bar	2.40
												km/h	
												30 FR	4760
												40 FR	4250
												30 DW	3360
												40 DW	3000

STD: Standard
SPL: Special



**MAIN APPLICATION:
IMPLEMENT**



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.										↓	↓
24" 16.5/85 - 24	W 13	W 14 L; W 15 L	415	1325	591	3837	STD	12	TL	163 A8	151 A8	bar	2.80
												km/h	
												30 FR	5460
												40 FR	4875
												30 DW	3865
												40 DW	3450
16.5/85 - 24	W 13	W 14 L; W 15 L	415	1325	591	3837	STD	16	TT	168 A8	155 A8	bar	3.80
												km/h	
												30 FR	6270
												40 FR	5600
												30 DW	4340
												40 DW	3875
16.5/85 - 24	W 13	W 14 L; W 15 L	415	1325	591	3837	STD	16	TL	168 A8	155 A8	bar	3.80
												km/h	
												30 FR	6270
												40 FR	5600
												30 DW	4340
												40 DW	3875
400/80 - 24	W 13	W 12; W 14 L	394	1262	566	3655	IND	-	TL	-	-	bar	3.80
												km/h	
												30	4160
												40	4000
400/80 - 24	W 13	W 12; W 14 L	394	1262	566	3655	IND	-	TL	-	-	bar	5.00
												km/h	
												30	4940
												40	4750

STD: Standard
IND: Industrial



**MAIN APPLICATION:
IMPLEMENT**



AS 505

AS 505 is best suited for soil tillage operations with small tractors and implement machinery. It features excellent self-cleaning properties and increased traction on the ground, especially on muddy soil.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.										↓	
15" 6.5/80 - 15	5.0	4½ K; 5 K; 5 J	169	683	325	2106	STD	6	TL	98 A8	86 A8	bar	3.60
												km/h	
												30 FR	840
												40 FR	750
												30 DW	595
												40 DW	530
6.5/80 - 15	5.0	4½ K; 5 K; 5 J	163	663	310	1976	STD	8	TL	104 A8	92 A8	bar	4.80
												km/h	
												30 FR	1010
												40 FR	900
												30 DW	705
												40 DW	630

STD: Standard



**MAIN APPLICATION:
IMPLEMENT**



AS 507

AS 507 is a field-oriented tire suitable for soil tillage with implement machinery. It features excellent self-cleaning properties and increased traction on the ground. The AS 507 "special" version offers even higher cut and chip resistance to face the most difficult operating conditions.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.										↓	
15" 185/65 - 15												bar	2.80
												km/h	
												30 FR	650
												40 FR	580
												30 DW	450
												40 DW	400

STD: Standard



AS 509

AS 509 has been specially designed for trailers, seeders and soil preparation machinery. Its tread pattern with a huge number of lugs provides a uniform weight distribution on the land. AS 509 ensures high load capacity at low inflation pressure, thus minimizing soil compaction and protecting crops.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)			
	Rec.	Alt.										↓			
22.5" 550/45 - 22.5	AG 16.00		540	1065			STD	20	TL	166 A8/162 B	154 A8/150 B	bar	3.00	3.50	4.00
												km/h			
												10 FR	6270	6860	7420
												20 FR	5645	6175	6680
												30 FR	5020	5490	5915
												40 FR	4480	4900	5300
												50 FR	4030	4410	4750
												10 DW	4440	4860	5250
												20 DW	3995	4370	4725
												30 DW	3550	3885	4200
40 DW	3170	3470	3750												
50 DW	2855	3125	3350												

STD: Standard



MAIN APPLICATION:
IMPLEMENT



FARM 2000 (R-1)

The FARM 2000 tire is suitable on tractors for soil tillage and transport applications. It is the ideal tire for heavy-duty use and in all operating conditions where good traction is required.



TRACTION DURABILITY HEAVY DUTY SERVICE

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.										↓	
15.3 260/70 - 15.3	9.00	-	265	775	349	2294	STD	-	TL	126 A8	114 A8	bar	3.60
												km/h	
												30 FR	1905
												40 FR	1700
												30 DW	1320
												40 DW	1180
300/80 - 15.3	9.00	-	300	890	388	2608	STD	-	TL	132 A8	120 A8	bar	2.80
												km/h	
												30 FR	2240
												40 FR	2000
												30 DW	1570
												40 DW	1400
16" 250/80 - 16	W 8	W 7; W 9; W 8 L	240	820	369	2412	STD	-	TT	125 A8	113 A8	bar	2.80
												km/h	
												30 FR	1850
												40 FR	1650
												30 DW	1290
												40 DW	1150
250/80 - 16	W 8	W 7; W 9; W 8 L	240	820	369	2412	STD	-	TL	125 A8	113 A8	bar	2.80
												km/h	
												30 FR	1850
												40 FR	1650
												30 DW	1290
												40 DW	1150
18" 250/80 - 18	W 8	W7; W9	240	870	394	2566	STD	-	TT	127 A8	115 A8	bar	2.80
												km/h	
												30 FR	1960
												40 FR	1750
												30 DW	1360
												40 DW	1215
250/80 - 18	W 8	W7; W9	240	870	394	2566	STD	-	TL	127 A8	115 A8	bar	2.80
												km/h	
												30 FR	1960
												40 FR	1750
												30 DW	1360
												40 DW	1215

STD: Standard



**MAIN APPLICATION:
IMPLEMENT**



TR 882

TR 882 is a very versatile tire suitable for several applications and vehicles. Designed to fit implement machinery and hay harvesters/balers, its usage is not only limited to soil tillage and hay harvesting operations. BKT has developed a specific TR 882 version to use the tire in forestry applications with trailers. TR 882 is also available as "aramid-belted", "HD" and "special" versions to meet specific end user requirements.



TRACTION



HIGH FLOTATION
CAPABILITY



AGRO-INDUSTRIAL
USE



CUT & CHIP
RESISTANCE



HEAVY DUTY SERVICE



HIGH PUNCTURE
RESISTANCE

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.										↓	
15.5" 400/60 - 15.5	AG 13.00	-	400	875	380	2564	STD	8	TL	134 A8	122 A8	bar	2.40
												km/h	2375
												30 FR	2120
												40 FR	1680
												30 DW	1500
												40 DW	
400/60 - 15.5	AG 13.00	-	400	875	380	2564	STD	14	TL	145 A8	132 A8	bar	3.60
												km/h	3250
												30 FR	2900
												40 FR	2240
												30 DW	2000
												40 DW	
400/60 - 15.5	AG 13.00	-	400	875	380	2564	AB	14	TL	145 A8	132 A8	bar	3.60
												km/h	3250
												30 FR	2900
												40 FR	2240
												30 DW	2000
												40 DW	
400/60 - 15.5	AG 13.00	-	400	875	380	2564	HD	14	TL	145 A8	132 A8	bar	3.60
												km/h	3250
												30 FR	2900
												40 FR	2240
												30 DW	2000
												40 DW	
400/60 - 15.5	AG 13.00	-	400	875	380	2564	SPL	14	TL	145 A8	132 A8	bar	3.60
												km/h	3250
												30 FR	2900
												40 FR	2240
												30 DW	2000
												40 DW	
400/60 - 15.5	AG 13.00	-	400	875	380	2564	STD	18	TL	149 A8	137 A8	bar	4.50
												km/h	3640
												30 FR	3250
												40 FR	2575
												30 DW	2300
												40 DW	

STD: Standard
 AB: Aramid Belted
 HD: Heavy Duty
 SPL: Special



**MAIN APPLICATION:
IMPLEMENT**



TR 882

TR 882 is a very versatile tire suitable for several applications and vehicles. Designed to fit implement machinery and hay harvesters/balers, its usage is not only limited to soil tillage and hay harvesting operations. BKT has developed a specific TR 882 version to use the tire in forestry applications with trailers. TR 882 is also available as "aramid-belted", "HD" and "special" versions to meet specific end user requirements.



TRACTION



HIGH FLOTATION CAPABILITY



AGRO-INDUSTRIAL USE



CUT & CHIP RESISTANCE



HEAVY DUTY SERVICE



HIGH PUNCTURE RESISTANCE

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.										↓	
155" 400/60 - 15.5	AG 13.00	-	400	875	380	2564	HD	18	TL	149 A8	137 A8	bar	4.50
												km/h	
												30 FR	3640
												40 FR	3250
												30 DW	2575
												40 DW	2300
400/60 - 15.5	AG 13.00	-	400	875	380	2564	SPL	18	TL	149 A8	137 A8	bar	4.50
												km/h	
												30 FR	3640
												40 FR	3250
												30 DW	2575
												40 DW	2300

HD: Heavy Duty
SPL: Special



MAIN APPLICATION:
IMPLEMENT



SL 441

SL 441 is a free rolling tire developed for soil tillage operations with trailers and implement machinery. SL 441 has been engineered to provide best handling to drivers.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.										↓	
14.5" 200/60 - 14.5	6.75	4.50 E; 5.50 F	210	610	278	1785	STD	10	TT	106 A8	-	bar	5.00
												km/h	1065
												30 FR	950
												40 FR	
200/60 - 14.5	6.75	4.50 E; 5.50 F	210	610	278	1785	STD	14	TT	113 A8	-	bar	7.00
												km/h	1290
												30 FR	1150
												40 FR	
200/60 - 14.5	6.75	4.50 E; 5.50 F	210	610	278	1785	STD	14	TL	113 A8	-	bar	7.00
												km/h	1290
												30 FR	1150
												40 FR	

STD: Standard



**MAIN APPLICATION:
LAWN & GARDEN**



TR 360

TR 360 is suitable for implement machinery in hay harvesting and lawn and garden applications. The particular tread design along with the casing structure provides excellent stability in all field conditions and ensures a long tire life-cycle.



DURABILITY

STABILITY

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 15 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
8" 18 X 7 - 8	5.5	-	180	460	202	1334	STD	6	TL	-	3.10	450

STD: Standard



LG SMOOTH

LG SMOOTH is a lawn and garden tire suitable for mowers. While the tire is gentle on the ground, the enhanced design ensures increased durability and eases handling. LG SMOOTH is available in an "aramid-belted" version for users who need strengthened puncture resistance.



DURABILITY

FIELD PROTECTION

HANDLING

HIGH PUNCTURE RESISTANCE

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 15 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
10" 18 X 10.50 - 10	8.5 I - 55; I - 70; I - 90	8½ JA	254	460	207	1334	STD	2	TL	-	0.80	334
20 X 10.00 - 10	8.00 I - 55	7.00 I - 55; I - 70; I - 90	245	500	223	1450	STD	2	TL	-	0.70	335
20 X 10.00 - 10	8.00 I - 55	7.00 I - 55; I - 70; I - 90	245	500	223	1450	STD	4	TL	-	1.50	530
20 X 10.00 - 10	8.00 I - 55	7.00 I - 55; I - 70; I - 90	245	500	223	1450	STD	6	TL	-	2.20	660
20 X 10.00 - 10	8.00 I - 55	7.00 I - 55; I - 70; I - 90	245	500	223	1450	AB	6	TL	-	2.20	660

STD: Standard
AB: Aramid Belted



**MAIN APPLICATION:
LAWN & GARDEN**



LG 306

LG 306 is a lawn and garden tire suitable for mowers. In some sizes, LG 306 is also fit for transport operations with airport cruise cars and small tractors in municipality/maintenance applications. The specific tread pattern makes the tire gentle on the ground, easing handling at the same time.

LG 306 is available in an "aramid-belted" version for users who need strengthened puncture resistance.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 15 KM/H	
	Rec.	Alt.									bar	max load (kg)
5" 11 X 4.00 - 5	3.00 A	-	104	272	120	789	STD	4	TL	-	3.20	150
6" 13 X 5.00 - 6	3.50 A	-	127	325	144	943	STD	4	TL	-	2.80	200
13 X 5.00 - 6	3.50 A	-	127	325	144	943	STD	6	TL	-	4.20	255
15 X 6.00 - 6	4.50 A	-	152	365	159	1059	STD	4	TL	-	2.10	257
15 X 6.00 - 6	4.50 A	-	152	365	159	1059	STD	6	TL	-	3.20	335
8" 16 X 6.50 - 8	5.375 I - 55; I - 70; I - 90	-	170	408	182	1183	STD	4	TL	-	1.90	280
16 X 6.50 - 8	5.375 I - 55; I - 70; I - 90	-	170	408	182	1183	STD	6	TL	-	2.90	355
16 X 6.50 - 8	5.375 I - 55; I - 70; I - 90	-	170	408	182	1183	AB	6	TL	-	2.90	355
16 X 6.50 - 8	5.375 I - 55; I - 70; I - 90	-	170	408	182	1183	STD	8	TL	-	3.70	400
18 X 8.50 - 8	7.00 I - 55; I - 70; I - 90	-	215	450	198	1305	STD	4	TL	-	1.50	375
18 X 8.50 - 8	7.00 I - 55; I - 70; I - 90	-	215	450	198	1305	STD	6	TL	-	2.30	475
18 X 8.50 - 8	7.00 I - 55; I - 70; I - 90	-	215	450	198	1305	AB	6	TL	-	2.30	475

STD: Standard
AB: Aramid Belted



**MAIN APPLICATION:
LAWN & GARDEN**



LG 306

LG 306 is a lawn and garden tire suitable for mowers. In some sizes, LG 306 is also fit for transport operations with airport cruise cars and small tractors in municipality/maintenance applications. The specific tread pattern makes the tire gentle on the ground, easing handling at the same time.

LG 306 is available in an "aramid-belted" version for users who need strengthened puncture resistance.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 15 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
8" 18 X 9.50 - 8	7.00 I - 55; I - 70; I - 90	-	230	470	206	1363	STD	4	TL	-	1.40	425
18 X 9.50 - 8	7.00 I - 55; I - 70; I - 90	-	230	470	206	1363	STD	6	TL	-	2.50	605
18 X 9.50 - 8	7.00 I - 55; I - 70; I - 90	-	230	470	206	1363	AB	6	TL	-	2.50	605
20 X 10.00 - 8	8.00 I - 55	7.00 I - 55; I - 70; I - 90	254	508	221	1473	STD	4	TL	-	1.50	545
20 X 10.00 - 8	8.00 I - 55	7.00 I - 55; I - 70; I - 90	254	508	221	1473	STD	6	TL	-	2.20	670
20 X 10.00 - 8	8.00 I - 55	7.00 I - 55; I - 70; I - 90	254	508	221	1473	AB	6	TL	-	2.20	670
10" 18 X 8.50 - 10	7.00 I - 55; I - 70; I - 90	-	210	460	209	1340	STD	4	TL	-	1.50	361
20 X 8.00 - 10	6.00 I - 55; I - 70; I - 90	6 JA	205	500	223	1450	STD	4	TL	-	1.70	412
20 X 8.00 - 10	6.00 I - 55; I - 70; I - 90	6 JA	205	500	223	1450	STD	6	TL	-	2.50	510
20 X 10.00 - 10	8.00 I - 55	7.00 I - 55	250	508	226	1473	STD	4	TL	-	1.50	530
20 X 10.00 - 10	8.00 I - 55	7.00 I - 55	250	508	226	1473	STD	6	TL	-	2.20	660
20 X 10.00 - 10	8.00 I - 55	7.00 I - 55	250	508	226	1473	AB	6	TL	-	2.20	660

STD: Standard
AB: Aramid Belted



**MAIN APPLICATION:
LAWN & GARDEN**



LG 306

LG 306 is a lawn and garden tire suitable for mowers. In some sizes, LG 306 is also fit for transport operations with airport cruise cars and small tractors in municipality/maintenance applications. The specific tread pattern makes the tire gentle on the ground, easing handling at the same time.

LG 306 is available in an "aramid-belted" version for users who need strengthened puncture resistance.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 15 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
12" 23 X 8.50 - 12	7.00 I - 55; I - 70; I - 90	7 JA	210	575	258	1668	STD	4	TL	-	1.50	500
23 X 8.50 - 12	7.00 I - 55; I - 70; I - 90	7 JA	210	575	258	1668	STD	6	TL	-	2.30	650
23 X 8.50 - 12	7.00 I - 55; I - 70; I - 90	7 JA	210	575	258	1668	AB	6	TL	-	2.30	650
23 X 8.50 - 12	7.00 I - 55; I - 70; I - 90	7 JA	210	575	258	1668	STD	8	TL	-	3.00	765
23 X 8.50 - 12	7.00 I - 55; I - 70; I - 90	7 JA	210	575	258	1668	STD	12	TL	-	4.50	960
23 X 10.50 - 12	8.5 I - 55	7.00 I - 55; I - 70; I - 90	260	585	262	1697	STD	4	TL	-	1.40	600
23 X 10.50 - 12	8.5 I - 55	7.00 I - 55; I - 70; I - 90	260	585	262	1697	STD	6	TL	-	2.20	800
23 X 10.50 - 12	8.5 I - 55	7.00 I - 55; I - 70; I - 90	260	585	262	1697	AB	6	TL	-	2.20	800
23 X 10.50 - 12	8.5 I - 55	7.00 I - 55; I - 70; I - 90	260	585	262	1697	STD	8	TL	-	3.00	955
23 X 10.50 - 12	8.5 I - 55	7.00 I - 55; I - 70; I - 90	260	585	262	1697	STD	12	TL	-	4.50	1215
24 X 12.00 - 12	9.5 AT	9.0 AT; 8.5 AT; 8.0 AT	298	610	276	1774	STD	4	TL	-	1.40	775
26 X 12.00 - 12	10.50 I - 55; I - 70; I - 90	10½ JA; 8½ JA	310	640	283	1856	STD	4	TL	-	1.40	800

STD: Standard
AB: Aramid Belted



**MAIN APPLICATION:
LAWN & GARDEN**



LG 306

LG 306 is a lawn and garden tire suitable for mowers. In some sizes, LG 306 is also fit for transport operations with airport cruise cars and small tractors in municipality/maintenance applications. The specific tread pattern makes the tire gentle on the ground, easing handling at the same time.

LG 306 is available in an "aramid-belted" version for users who need strengthened puncture resistance.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									bar	km/h	
12"	26 X 12.00 - 12	10.50 I - 55; I - 70; I - 90	10½ JA; 8½ JA	310	640	283	1856	AB	6	TL	-	bar	2.10
												km/h	1030
												15	1265
	26 X 12.00 - 12	10.50 I - 55; I - 70; I - 90	10½ JA; 8½ JA	310	640	283	1856	STD	8	TL	-	bar	3.00
												km/h	1265
26 X 12.00 - 12	10.50 I - 55; I - 70; I - 90	10½ JA; 8½ JA	310	640	283	1856	AB	8	TL	-	bar	3.00	
											km/h	1265	
26 X 12.00 - 12	10.50 I - 55; I - 70; I - 90	10½ JA; 8½ JA	310	640	283	1856	STD	12	TL	-	bar	4.50	
											km/h	1600	
26 X 12.00 - 12	10.50 I - 55; I - 70; I - 90	10½ JA; 8½ JA	310	640	283	1856	STD	14	TL	-	bar	5.20	
											km/h	1740	
14"	24 X 8.50 - 14	7 JA	-	210	610	280	1769	STD	4	TL	-	bar	1.60
												km/h	550
												15	750
14"	25 X 8.50 - 14	7.00 I - 55; I - 70; I - 90	-	220	638	333	1914	STD	6	TL	-	bar	2.20
												km/h	750
												15	750
15"	27 X 8.50 - 15	7.00 JA	-	216	680	308	1970	STD	4	TL	-	bar	2.10
												km/h	560
												50	560
	27 X 10.50 - 15	8.00 LB	-	272	705	318	2042	STD	4	TL	-	bar	2.10
												km/h	600
27 X 10.50 - 15	8.00 LB	-	272	705	318	2042	STD	12	TL	-	bar	6.10	
											km/h	1100	
31 X 15.5 - 15	13 LB	-	391	792	350	2313	STD	4	TL	-	bar	1.40	
											km/h	775	

STD: Standard
AB: Aramid Belted



MAIN APPLICATION:
LAWN & GARDEN



LG 306

LG 306 is a lawn and garden tire suitable for mowers. In some sizes, LG 306 is also fit for transport operations with airport cruise cars and small tractors in municipality/maintenance applications. The specific tread pattern makes the tire gentle on the ground, easing handling at the same time.

LG 306 is available in an "aramid-belted" version for users who need strengthened puncture resistance.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									↓	
16" 13.6 - 16	W 12	W 11	388	975	414	2847	STD	4	TL	-	bar	1.00
											km/h	950
											15	
16.5" 33 X 15.50 - 16.5	12.00	-	396	840	374	2453	STD	10	TL	-	bar	2.10
											km/h	1630
											15	
20" 38 X 14.00 - 20	W 11	W 11 H	375	980	435	2894	STD	4	TL	-	bar	1.70
											km/h	1050
											50	
44 X 18.00 - 20	W 14 L	W 14 LH	475	1180	543	3496	STD	4	TL	-	bar	1.40
											km/h	1500
											50	

STD: Standard



**MAIN APPLICATION:
LAWN & GARDEN**



LG 307

LG 307 is a lawn and garden tire suitable for mowers. The specific tread pattern makes the tire gentle on the ground to prevent turf damages, easing handling at the same time.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 15 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
8" 20 X 10.00 - 8	8.00 I - 55; I - 70; I - 90	7.00 I - 55; I - 70; I - 90	255	495	215	1435	STD	4	TL	-	1.50	545
20 X 10.00 - 8	8.00 I - 55; I - 70; I - 90	7.00 I - 55; I - 70; I - 90	255	495	215	1435	STD	6	TL	-	2.20	670
10" 20 X 12.00 - 10	8.5 I - 55; I - 70; I - 90	-	285	500	221	1435	STD	4	TL	-	1.40	600

STD: Standard





**MAIN APPLICATION:
LAWN & GARDEN**



LG 408

LG 408 is a lawn and garden tire suitable for mowers. The specific tread pattern makes the tire gentle on the ground to prevent turf damages. LG 408 is available in an "aramid-belted" version for users who need strengthened puncture resistance.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 15 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
12" 24 X 13.00 - 12	10.5 I - 55; I - 70; I - 90	-	320	605	269	1755	STD	4	TL	-	1.40	835
24 X 13.00 - 12	10.5 I - 55; I - 70; I - 90	-	320	605	269	1755	STD	6	TL	-	2.20	1085
24 X 13.00 - 12	10.5 I - 55; I - 70; I - 90	-	320	605	269	1755	AB	6	TL	-	2.20	1085
26.5 X 14.00 - 12	12.00 I	-	380	665	293	1929	STD	4	TL	-	1.30	985
26.5 X 14.00 - 12	12.00 I	-	380	665	293	1929	STD	6	TL	-	2.00	1280
26.5 X 14.00 - 12	12.00 I	-	380	665	293	1929	AB	6	TL	-	2.00	1280

STD: Standard
AB: Aramid Belted



**MAIN APPLICATION:
LAWN & GARDEN**



LG RIB

LG RIB is a lawn and garden tire suitable for mowers. The specific tread pattern makes the tire gentle on the ground to prevent turf damages and ensures a long product life. LG RIB is available in an "aramid-belted" version for users who need strengthened puncture resistance.



DURABILITY



FIELD PROTECTION



HIGH PUNCTURE RESISTANCE

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 15 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
6" 13 X 5.00 - 6	3.50 A	-	127	325	144	943	STD	4	TL	-	2.80	200
13 X 5.00 - 6	3.50 A	-	127	325	144	943	AB	6	TL	-	4.20	255
15 X 6.00 - 6	4.50 A	-	152	365	159	1059	STD	4	TL	-	2.10	257
15 X 6.00 - 6	4.50 A	-	152	365	159	1059	STD	6	TL	-	3.20	335
15 X 6.00 - 6	4.50 A	-	152	365	159	1059	AB	6	TL	-	3.20	335
8" 16 X 6.50 - 8	5.375 I - 55; I - 70; I - 90	-	170	408	182	1183	STD	4	TT	-	1.90	280
16 X 6.50 - 8	5.375 I - 55; I - 70; I - 90	-	170	408	182	1183	STD	4	TL	-	1.90	280
16 X 6.50 - 8	5.375 I - 55; I - 70; I - 90	-	170	408	182	1183	STD	6	TL	-	2.90	355
16 X 6.50 - 8	5.375 I - 55; I - 70; I - 90	-	170	408	182	1183	AB	6	TL	-	2.90	355
16 X 6.50 - 8	5.375 I - 55; I - 70; I - 90	-	170	408	182	1183	STD	8	TL	-	3.90	420
16 X 6.50 - 8	5.375 I - 55; I - 70; I - 90	-	170	408	182	1183	STD	10	TL	-	4.90	480
10" 20 X 10.00 - 10	8.00 I - 55; I - 70; I - 90	7.00 I - 55; I - 70; I - 90	236	498	222	1444	STD	4	TL	-	1.50	530

STD: Standard
AB: Aramid Belted



MAIN APPLICATION:
LAWN & GARDEN



TRAC MASTER

TRAC MASTER is a soil tillage and lawn and garden tire, suitable for small tractors, implement machinery, compact loaders, and mowers. It has been designed to improve traction, while the wider footprint ensures great stability.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 50 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
12" 300/60 - 12	10.5	9.5	306	645	285	1885	STD	8	TL	-	3.20	1030
15" 31 X 15.50 - 15	13 LB	-	405	810	357	2365	STD	6	TL	-	2.10	975
31 X 15.50 - 15	13 LB	-	405	810	357	2365	STD	8	TL	-	3.10	1250
33 X 15.50 - 15	13 LB	-	404	865	378	2526	STD	6	TL	-	2.10	1370
33 X 15.50 - 15	13 LB	-	404	865	378	2526	STD	8	TL	-	3.10	1620

STD: Standard



TR 313

TR 313 is suitable for soil tillage and lawn and garden operations with implement machinery, trenchers and orchard harvesters. It is an ideal tire for muddy grounds. The large contact area provides an excellent grip. The TR 313 tire has been engineered to ensure a high level of stability also in critical operating conditions.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 50 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
15" 31 X 15.50 - 15	13 LB	-	370	770	342	2233	STD	8	TL	-	3.10	1250

STD: Standard



**MAIN APPLICATION:
LAWN & GARDEN**



TR 315

TR 315 is suitable for muddy grounds in soil tillage and lawn and garden operations. It is ideal with implement machinery, trenchers and orchard harvesters. The TR 315 tire has a large contact area which provides excellent grip and outstanding stability in any condition.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									bar	km/h
8" 16 X 6.50 - 8	5.375 I - 55; I - 70; I - 90	-	155	408	182	1183	STD	4	TL	-	bar	1.90
											km/h	280
											15	280
16 X 6.50 - 8	5.375 I - 55; I - 70; I - 90	-	155	408	182	1183	STD	6	TL	-	bar	2.90
											km/h	355
											15	355
12" 23 X 8.50 - 12	7 JA; 7.00 I - 55; I - 70; I - 90	-	205	575	258	1668	STD	4	TL	-	bar	1.50
											km/h	500
											15	500
23 X 8.50 - 12	7 JA; 7.00 I - 55; I - 70; I - 90	-	205	575	258	1668	STD	6	TL	-	bar	2.30
											km/h	650
											15	650
23 X 10.50 - 12	8½ JA	7 JA	255	590	260	1682	STD	4	TL	-	bar	1.40
											km/h	600
											15	600
23 X 10.50 - 12	8½ JA	7 JA	255	590	260	1682	STD	6	TL	-	bar	2.20
											km/h	800
											15	800
23 X 10.50 - 12	8½ JA	7 JA	255	590	260	1682	STD	8	TL	-	bar	3.00
											km/h	960
											15	960
23 X 10.50 - 12	8½ JA	7 JA	255	590	260	1682	STD	10	TL	-	bar	3.80
											km/h	1100
											15	1100
26 X 12.00 - 12	10½ JA	8½ JA; 9½ JA	308	655	289	1905	STD	4	TL	-	bar	1.40
											km/h	800
											15	800
26 X 12.00 - 12	10½ JA	8½ JA; 9½ JA	308	655	289	1905	STD	8	TL	-	bar	3.00
											km/h	1265
											15	1265
26 X 12.00 - 12	10½ JA	8½ JA; 9½ JA	308	655	289	1905	STD	10	TL	-	bar	3.80
											km/h	1450
											15	1450
26 X 12.00 - 12	10½ JA	8½ JA; 9½ JA	308	655	289	1905	SPL	10	TL	-	bar	3.80
											km/h	1450
											15	1450
26 X 12.00 - 12	10½ JA	8½ JA; 9½ JA	308	655	289	1905	STD	12	TL	-	bar	4.50
											km/h	1600
											15	1600
15" 31 X 15.50 - 15	13 LB	-	390	800	354	2320	STD	8	TL	-	bar	3.10
											km/h	1250
											50	1250
31 X 15.50 - 15	13 LB	-	390	800	354	2320	STD	10	TL	-	bar	4.10
											km/h	1450
											50	1450
31 X 15.50 - 15	10 LB	-	390	800	354	2320	STD	12	TL	-	bar	5.10
											km/h	1650
											50	1650

STD: Standard SPL: Special



MAIN APPLICATION:
LAWN & GARDEN



TR 317

TR 317 is suitable for soil tillage operations on muddy grounds with implement machinery and trenchers. The TR 317 tire has a large contact area which provides excellent grip and outstanding stability in any condition.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 15 KM/H	
	Rec.	Alt.									bar	max load (kg)
8" 18 X 8.50 - 8	7.00 I - 55; I - 70; I - 90	-	215	450	198	1305	STD	4	TL	-	1.50	375

STD: Standard



TR 319

TR 319 is a tire for implement machinery, orchard harvesters and trenchers in lawn and garden as well as soil tillage applications. Featuring a large contact area providing best traction, TR 319 is very suitable for applications on wet and dry surfaces.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									bar	km/h
12" 26 X 12.00 - 12	10.50 AT	8.0 AT; 8.5 AT; 9.0 AT	318	640	-	-	STD	8	TL	116 A3	3.00	1250
15" 29 X 12.50 - 15	10 LB	-	312	755	-	-	STD	6	TL	98 B	2.10	750
29 X 12.50 - 15	10 LB	-	312	755	-	-	STD	8	TL	106 B	3.10	950

STD: Standard



MAIN APPLICATION:
GOLF



GF 304

GF 304 is suitable for soil tillage applications with implement machinery and trenchers. No matter which soil tillage operation you are performing on your field, GF 304 will ensure best comfort and ground protection. GF 304 is also available as "aramid-belted" version to provide increased puncture resistance.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 15 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
8" 18 X 8.50 - 8	7.00 I - 55; I - 70; I - 90	-	216	460	202	1334	STD	4	TL	-	1.50	375
18 X 8.50 - 8	7.00 I - 55; I - 70; I - 90	-	216	460	202	1334	AB	4	TL	-	1.50	375
18 X 8.50 - 8	7.00 I - 55; I - 70; I - 90	-	216	460	202	1334	STD	6	TL	-	2.30	475

STD: Standard
AB: Aramid Belted



GF 305 CLASSIC

GF 305 CLASSIC is a special tire mainly designed for golf carts, but it is also suitable for some hay harvesting operations with implement machinery. This tire is naturally gentle on the ground and protects the field from damages. GF 305 CLASSIC is a really comfortable tire which makes riding a pleasure.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 15 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
10" 205/50 - 10	7.00 I - 55	6.00 I - 55; I - 70; I - 90	215	470	211	1363	STD	4	TL	-	2.20	302
205/50 - 10	7.00 I - 55	6.00 I - 55; I - 70; I - 90	215	470	211	1363	STD	6	TL	-	3.20	460

STD: Standard



MAIN APPLICATION:
TRAILER



GF 305 FARM TRAILER

GF 305 FARM TRAILER has been designed for trailers in transport operations. This tire is particularly suitable for heavy-duty service and provides outstanding stability in any condition.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 40 KM/H	
	Rec.	Alt.									bar	max load (kg)
10" 205/65 - 10 (20.5 x 8.00 - 10)	6.00	-	212	520	223	1508	STD	10	TL	-	6.20	695

STD: Standard



INDUSTRIAL RIB F3 (F-3)

INDUSTRIAL RIB F3 is an agro-industrial rib-pattern tire designed for field and road transport as well as for soil tillage operations with implement machinery and trailers. This tire features outstanding cut and chip resistance making it suitable for the most critical operating conditions and ensuring a long tire life-cycle.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									bar	km/h
15" 11L - 15 SL	8 LB	10 LB	279	813	-	-	STD	10	TL	-	bar	3.60
											30 km/h	1185
											40 km/h	1060
11L - 15 SL	8 LB	10 LB	279	813	-	-	STD	12	TL	-	bar	4.20
											30 km/h	1290
											40 km/h	1160
16" 11L - 16 SL	W 8 L	8 LB; 10 LB; W 10 L	279	830	-	-	STD	10	TL	-	bar	3.60
											30 km/h	1250
											40 km/h	1120
11L - 16 SL	W 8 L	8 LB; 10 LB; W 10 L	279	830	-	-	SPL	10	TL	-	bar	3.60
											30 km/h	1250
											40 km/h	1120
11L - 16 SL	W 8 L	8 LB; 10 LB; W 10 L	279	830	-	-	STD	12	TL	-	bar	4.40
											30 km/h	1385
											40 km/h	1250

STD: Standard
SPL: Special



**MAIN APPLICATION:
TRAILER**



I-1 (I-1)

I-1 has been designed for field and road transport as well as for soil tillage operations with implement machinery and trailers. I-1 is a high-speed tire that optimizes travel times so that you can focus on your core business. Thanks to its flotation capability, the I-1 tire reduces soil compaction in the field and avoids damages to your valuable crops.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									bar	km/h	
14"	9.5L - 14 SL	7.00	8 KB	240	735	326	2154	STD	8	TT	-	bar	3.00
												km/h	1090
												65	1090
9.5L - 14 SL	7.00	8 KB	240	735	326	2154	STD	8	TL	-	bar	3.00	
											km/h	1090	
											65	1090	
11L - 14 SL	8.00	8 KB	256	753	333	2206	STD	8	TL	-	bar	2.50	
											km/h	1120	
											65	1120	
15"	6.70 - 15 SL	4½ KB	5 KB	172	710	319	2080	STD	6	TT	-	bar	3.00
												km/h	730
												65	730
	6.70 - 15 SL	4½ KB	5 KB	172	710	319	2080	STD	6	TL	-	bar	3.00
												km/h	730
												65	730
	6.70 - 15 SL	4½ KB	5 KB	172	710	319	2080	STD	8	TT	-	bar	3.90
												km/h	850
												65	850
	7.60 - 15 SL	5.50	6 LB	193	734	328	2151	STD	6	TT	-	bar	2.80
												km/h	800
												65	800
	7.60 - 15 SL	5.50	6 LB	193	734	328	2151	STD	8	TT	-	bar	3.60
												km/h	950
												65	950
7.60 - 15 SL	5.50	6 LB	193	734	328	2151	STD	10	TT	-	bar	4.30	
											km/h	1050	
											65	1050	
7.60 - 15 SL	5.50	6 LB	193	734	328	2151	STD	10	TL	-	bar	4.30	
											km/h	1050	
											65	1050	
9.5L - 15 SL	7.00	8 LB	241	765	340	2242	STD	6	TT	-	bar	2.20	
											km/h	925	
											65	925	
9.5L - 15 SL	7.00	8 LB	241	765	340	2242	STD	8	TT	-	bar	3.00	
											km/h	1120	
											65	1120	
9.5L - 15 SL	7.00	8 LB	241	765	340	2242	STD	8	TL	-	bar	3.00	
											km/h	1120	
											65	1120	
9.5L - 15 SL	7.00	8 LB	241	765	340	2242	SR	8	TL	-	bar	3.00	
											km/h	1120	
											65	1120	
9.5L - 15 SL	7.00	8 LB	241	765	340	2242	STD	12	TL	-	bar	4.40	
											km/h	1450	
											65	1450	

STD: Standard
SR: Stubble Resistant



**MAIN APPLICATION:
TRAILER**



I-1 (I-1)

I-1 has been designed for field and road transport as well as for soil tillage operations with implement machinery and trailers. I-1 is a high-speed tire that optimizes travel times so that you can focus on your core business. Thanks to its flotation capability, the I-1 tire reduces soil compaction in the field and avoids damages to your valuable crops.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									↓	↓
15" 9.5L - 15 SL	7.00	8 LB	241	765	340	2242	SR	12	TL	-	bar	4.40
											km/h	65
11L - 15 SL	8 LB	10 LB	270	770	342	2256	STD	8	TT	-	bar	2.50
											km/h	65
11L - 15 SL	8 LB	10 LB	270	770	342	2256	STD	8	TL	-	bar	2.50
											km/h	65
11L - 15 SL	8 LB	10 LB	270	770	342	2256	SR	8	TL	-	bar	2.50
											km/h	65
11L - 15 SL	8 LB	10 LB	270	770	342	2256	STD	10	TT	-	bar	3.00
											km/h	65
11L - 15 SL	8 LB	10 LB	270	770	342	2256	STD	10	TL	-	bar	3.00
											km/h	65
11L - 15 SL	8 LB	10 LB	270	770	342	2256	STD	12	TL	-	bar	3.60
											km/h	65
11L - 15 SL	8 LB	10 LB	270	770	342	2256	SR	12	TL	-	bar	3.60
											km/h	65
12.5L - 15 SL	10 LB	-	310	820	362	2403	STD	8	TT	-	bar	2.50
											km/h	65
12.5L - 15 SL	10 LB	-	310	820	362	2403	STD	8	TL	-	bar	2.50
											km/h	65
12.5L - 15 SL	10 LB	-	310	820	362	2403	STD	10	TT	-	bar	3.00
											km/h	65
12.5L - 15 SL	10 LB	-	310	820	362	2403	STD	10	TL	-	bar	3.00
											km/h	65
12.5L - 15 SL	10 LB	-	310	820	362	2403	STD	12	TT	-	bar	3.60
											km/h	65
12.5L - 15 SL	10 LB	-	310	820	362	2403	STD	12	TL	-	bar	3.60
											km/h	65
12.5L - 15 SL	10 LB	-	310	820	362	2403	SR	12	TL	-	bar	3.60
											km/h	65

STD: Standard
SR: Stubble Resistant



**MAIN APPLICATION:
TRAILER**



I-1 (I-1)

I-1 has been designed for field and road transport as well as for soil tillage operations with implement machinery and trailers. I-1 is a high-speed tire that optimizes travel times so that you can focus on your core business. Thanks to its flotation capability, the I-1 tire reduces soil compaction in the field and avoids damages to your valuable crops.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									bar	km/h
16" 7.50 - 16 SL	5.50 F	6 LB	205	785	350	2300	STD	8	TT	-	bar	3.30
											65	1060
7.50 - 16 SL	5.50 F	6 LB	205	785	350	2300	SPL	8	TT	-	bar	3.30
											65	1060
7.50 - 16 SL	5.50 F	6 LB	205	785	350	2300	STD	10	TT	-	bar	4.10
											65	1215
7.50 - 16 SL	5.50 F	6 LB	205	785	350	2300	SPL	10	TT	-	bar	4.10
											65	1215
9.00 - 16 SL	6 LB	8 LB; W 8 L	234	845	374	2476	STD	10	TT	-	bar	3.60
											65	1500
11L - 16 SL	8 LB	10 LB; W 8 L	270	795	355	2329	STD	8	TT	-	bar	2.50
											65	1215
11L - 16 SL	8 LB	10 LB; W 8 L	270	795	355	2329	STD	10	TT	-	bar	3.00
											65	1360
11L - 16 SL	8 LB	10 LB; W 8 L	270	795	355	2329	STD	12	TT	-	bar	3.50
											65	1490
12.5L - 16 SL	10 LB	W 10 L	310	845	374	2476	STD	8	TT	-	bar	2.50
											65	1400
12.5L - 16 SL	10 LB	W 10 L	310	845	374	2476	STD	10	TT	-	bar	3.00
											65	1600
12.5L - 16 SL	10 LB	W 10 L	310	845	374	2476	STD	12	TT	-	bar	3.60
											65	1800
12.5L - 16 SL	10 LB	W 10 L	310	845	374	2476	STD	12	TL	-	bar	3.60
											65	1800
12.5L - 16 SL	10 LB	W 10 L	310	845	374	2476	SR	14	TL	-	bar	3.90
											65	1900

STD: Standard
SPL: Special
SR: Stubble Resistant



**MAIN APPLICATION:
TRAILER**



I-1 (I-1)

I-1 has been designed for field and road transport as well as for soil tillage operations with implement machinery and trailers. I-1 is a high-speed tire that optimizes travel times so that you can focus on your core business. Thanks to its flotation capability, the I-1 tire reduces soil compaction in the field and avoids damages to your valuable crops.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									↓	
16.1"	14L - 16.1 SL	W 11 C	-	360	935	409	2740	STD	8	TL	-	bar 2.20
												km/h 65
												bar 3.00
												km/h 65
												bar 2.50
												km/h 50
												bar 2.20
												km/h 50
												bar 2.50
												km/h 50
24"	9.00 - 24 SL	W 8 H	-	272	1094	-	-	STD	8	TL	-	bar 2.80
												km/h 50
												bar 2.20
												km/h 50

STD: Standard



MAIN APPLICATION:
TRAILER



AGRI GRIP

AGRI GRIP is a tire for transport operations and particularly suitable for sugarcane trailers. AGRI GRIP has a strong casing providing high load capacity and particular cut-and-chip resistance. Its tread pattern has been designed for a longer service life.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									bar	km/h
26"												
23.1 - 26	DW 20 B	-	595	1560	708	4658	DB	18	TL	-	30 FR LLV	5600

DB: Dual Bead



FARM HIGHWAY TOUGH

FARM HIGHWAY TOUGH is a high-speed tire designed for transport applications with trailers. It provides high load capacity to improve your productivity and ensures a long tire life-cycle.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	LR	TYPE	LI/SS	LOAD CAPACITY 100 KM/H	
	Rec.	Alt.										bar	max load (kg)
15"													
9.5L - 15 FI	7.00	8 LB	245	766	343	2183	STD	8	D	TL	-	4.10	1215
9.5L - 15 FI	7.00	8 LB	245	766	343	2183	STD	12	F	TL	-	6.20	1550
10.00 - 15 FI	8 LB	-	274	853	-	-	STD	8	D	TL	-	4.10	1800
11L - 15 FI	8 LB	10 LB; 8 J	279	777	347	2214	STD	8	D	TL	-	4.10	1400
11L - 15 FI	8 LB	10 LB; 8 J	279	777	347	2214	STD	12	F	TL	-	6.20	1800
12.5L - 15 FI	10 LB	-	317	815	362	2323	STD	12	F	TL	-	6.20	2120

STD: Standard



MAIN APPLICATION:
TRAILER



BK 823

BK 823 is a field-oriented tire mainly designed for 2WD tractors, implement machinery and trailers in transport and soil tillage applications. Its special block pattern makes the tire particularly suitable for heavy-duty service.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 40 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
16" 9.00 - 16	6.5	-	245	891	394	2583	STD	12	TT	124 A8	3.80	1600
9.00 - 16	6.5	-	245	891	394	2583	STD	14	TT	127 A8	4.40	1750
9.00 - 16	6.5	-	245	891	394	2583	HD	14	TT	127 A8	4.40	1750

STD: Standard
HD: Heavy Duty



**MAIN APPLICATION:
TRAILER**



SL 441

SL 441 is a free rolling tire developed for soil tillage operations with trailers and implement machinery. SL 441 has been engineered to provide best handling to drivers.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS Free Rolling	LI/SS Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.										↓	
14.5" 200/60 - 14.5	6.75	4.50 E; 5.50 F	210	610	278	1785	STD	10	TT	106 A8	-	bar	5.00
												km/h	1065
												30 FR	950
												40 FR	
200/60 - 14.5	6.75	4.50 E; 5.50 F	210	610	278	1785	STD	14	TT	113 A8	-	bar	7.00
												km/h	1290
												30 FR	1150
												40 FR	
200/60 - 14.5	6.75	4.50 E; 5.50 F	210	610	278	1785	STD	14	TL	113 A8	-	bar	7.00
												km/h	1290
												30 FR	1150
												40 FR	

STD: Standard



MAIN APPLICATION:
TRAILER



ST 180

ST 180 is a road-oriented tire developed for soil tillage and transport applications with trailers and implement machinery. Its specific tread pattern ensures a long tire life-cycle due to reduced wear and contributes to significant fuel savings.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)			
	Rec.	Alt.									bar	km/h		
8"	4.80 - 8	3.75 - 1 - 55	3.75 - 1 - 70	121	418	-	-	STD	6	TL	-	bar	6.20	
												km/h	100	345
												bar	5.20	
5.70 - 8	4.50 - 1 - 55	1 - 70; 1 - 90; 3.75	142	475	-	-	STD	6	TL	-	bar	5.20		
											km/h	100	412	
5.70 - 8	4.50 - 1 - 55	1 - 70; 1 - 90; 3.75	142	475	-	-	STD	8	TL	-	bar	6.90		
											km/h	100	487	
9"	6.00 - 9	4.00 - 1 - 55	4.50 - 1 - 55; 1 - 70; 1 - 90	165	540	-	-	STD	8	TT	-	bar	5.90	
												km/h	100	630
	6.00 - 9	4.00 - 1 - 55	4.50 - 1 - 55; 1 - 70; 1 - 90	165	540	-	-	STD	8	TL	-	bar	5.90	
												km/h	100	630
	6.00 - 9	4.00 - 1 - 55	4.50 - 1 - 55; 1 - 70; 1 - 90	165	540	-	-	STD	10	TL	-	bar	6.90	
km/h												100	690	
6.00 - 9	4.00 - 1 - 55	4.50 - 1 - 55; 1 - 70; 1 - 90	165	540	-	-	STD	12	TT	-	bar	7.90		
											km/h	100	830	
6.00 - 9	4.00 - 1 - 55	4.50 - 1 - 55; 1 - 70; 1 - 90	165	540	-	-	STD	12	TL	-	bar	7.90		
											km/h	100	830	
10"	5.00 - 10	3.5	-	142	530	-	-	STD	6	TL	-	bar	3.00	
												km/h	100	390
13"	ST 165/80 D 13 (A 78 - 13)	4½ J	5 J; 5½ J; 6 J	156	597	272	1746	STD	4	TL	-	bar	2.50	
												km/h	40	450
	ST 175/80 D 13 (B 78 - 13)	5 J	4½ J; 5½ J; 6 J	175	620	286	1845	STD	4	TL	-	bar	2.50	
												km/h	40	500
ST 175/80 D 13 (B 78 - 13)	5 J	4½ J; 5½ J; 6 J	175	620	286	1845	STD	6	TL	-	bar	3.50		
											km/h	40	615	
ST 175/80 D 13 (B 78 - 13)	5 J	4½ J; 5½ J; 6 J	175	620	286	1845	STD	8	TL	-	bar	4.50		
											km/h	40	710	

STD: Standard



MAIN APPLICATION:
TRAILER



ST 180

ST 180 is a road-oriented tire developed for soil tillage and transport applications with trailers and implement machinery. Its specific tread pattern ensures a long tire life-cycle due to reduced wear and contributes to significant fuel savings.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)			
	Rec.	Alt.									↓			
14"	ST 195/75 D 14 (E 78 - 14)	5 J	5½ J; 6 J; 6½ J	192	668	312	2013	STD	4	TL	-	bar	2.50	
												km/h	600	
												40	600	
												bar	3.50	
												km/h	730	
												40	730	
												bar	4.50	
												km/h	850	
												40	850	
	ST 205/65 D 14 (F 65 - 14)	5 J	5½ J	190	621	292	1875	STD	6	TL	-	bar	3.50	
												km/h	800	
												40	800	
	ST 205/75 D 14 (F 78 - 14)	6 J	5 J; 5½ J; 6 J	200	682	317	2049	STD	4	TL	-	bar	2.50	
												km/h	650	
												40	650	
	ST 205/75 D 14 (F 78 - 14)	6 J	5 J; 5½ J; 6 J	200	682	317	2049	STD	6	TL	-	bar	3.50	
												km/h	800	
												40	800	
	ST 215/75 D 14 (G 78 - 14)	6 J	5½ J; 6½ J; 7 J	205	682	320	2073	STD	6	TL	-	bar	3.50	
												km/h	850	
												40	850	
15"	ST 205/65 D 15 (F 65 - 15)	6 J	5½ J; 6½ J	193	648	303	1935	STD	6	TL	-	bar	3.50	
												km/h	825	
												40	825	
		ST 205/75 D 15 (F 78 - 15)	5½ J	5 J; 6 J; 7 J	195	702	327	2103	STD	4	TL	-	bar	2.50
												km/h	670	
												40	670	
		ST 205/75 D 15 (F 78 - 15)	5½ J	5 J; 6 J; 7 J	195	702	327	2103	STD	6	TL	-	bar	3.50
												km/h	825	
												40	825	
	ST 225/75 D 15 (H 78 - 15)	6 J	5½ J; 6½ J; 7 J	217	730	337	2178	STD	6	TL	-	bar	3.50	
												km/h	975	
												40	975	
	ST 225/75 D 15 (H 78 - 15)	6 J	5½ J; 6½ J; 7 J	217	730	337	2178	STD	8	TL	-	bar	4.50	
												km/h	1150	
												40	1150	

STD: Standard



MAIN APPLICATION:
TRAILER



TR 387 (R-3)

TR 387 is an agro-industrial tire suitable for soil compactors. It features outstanding flotation capability and is available in different versions to meet specific user requirements in terms of cut and chip resistance, heavy-duty services and durability. The "dual bead" version is particularly suitable for industrial tractors and transport operations on trailers.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
26" 18.4 - 26	DW 16 L	DW 15 L	475	1430	635	4150	STD	10	TL	142 A6	1.80	2650
18.4 - 26	DW 16 L	DW 15 L	475	1430	635	4150	STD	12	TL	146 A6	2.30	3000
18.4 - 26	DW 16 L	DW 15 L	475	1430	635	4150	HD	16	TL	152 A6	2.90	3550
23.1 - 26	DW 20 B	-	587	1560	690	4545	STD	8	TL	145 A6	1.10	2900
23.1 - 26	DW 20 B	-	587	1560	690	4545	STD	12	TL	153 A6	1.70	3650
23.1 - 26	DW 20 B	-	587	1560	690	4545	HD	12	TL	164 A6	1.70	5000
23.1 - 26	DW 20 B	-	587	1560	690	4545	STD	16	TL	159 A6	2.30	4375
23.1 - 26	DW 20 B	-	587	1560	690	4545	DB	16	TL	159 A6	2.30	4375
23.1 - 26	DW 20 B	-	587	1560	690	4545	DB HD	18	TT	161 A6	2.60	4625
23.1 - 26	DW 20 B	-	587	1560	690	4545	DB HD	18	TL	161 A6	2.60	4625
23.1 - 26	DW 20 B	-	587	1560	690	4545	HD DB SPL	18	TL	161 A6	2.60	4625

STD: Standard
 HD: Heavy Duty
 DB: Dual Bead
 DB HD: Dual Bead Heavy Duty
 HD DB SPL: Heavy Duty Dual Dead Special



MAIN APPLICATION:
TRAILER



TR 387 (R-3)

TR 387 is an agro-industrial tire suitable for soil compactors. It features outstanding flotation capability and is available in different versions to meet specific user requirements in terms of cut and chip resistance, heavy-duty services and durability. The "dual bead" version is particularly suitable for industrial tractors and transport operations on trailers.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
28" 12.4 - 28	W 11	W 9; W 10	325	1200	550	3576	STD	8	TL	123 A6	2.30	1550
16.9 - 28	DW 15 L	DW 14 L	440	1400	630	4074	STD	8	TL	135 A6	1.70	2180
30" 16.9 - 30 (14 - 30)	DW 15 L	DW 14 L	440	1450	655	4220	STD	8	TL	137 A6	1.70	2300
18.4 - 30 (15 - 30)	DW 16 L	DW 15 L	475	1530	680	4395	STD	8	TL	139 A6	1.40	2430
18.4 - 30 (15 - 30)	DW 16 L	DW 15 L	475	1530	680	4395	HD	14	TT	151 A6	2.60	3450
620/75 - 30 (23.1 - 30)	DW 20 A; DW 20 B	-	605	1675	-	-	STD	18	TL	164 A6	2.60	5000
32" 24.5 - 32	DH 21	DH 21 B; DH 21 H; DH 21 HB	625	1755	790	5226	STD	16	TL	164 A6	2.10	5000

STD: Standard
HD: Heavy Duty



**MAIN APPLICATION:
TRAILER**



TR 390 (R-3)

TR 390 is an agro-industrial tire suitable for soil compactors. TR 390 features outstanding flotation capability and increased durability. Its "dual bead HD" version is particularly suitable for industrial tractors and transport operations on trailers, whereas its "dual bead HD special" version is ideal for heavy-duty service.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
26" 23.1 - 26	DW 20 B	-	587	1560	690	4545	STD	8	TL	145 A6	1.10	2900
23.1 - 26	DW 20 B	-	587	1560	690	4545	STD	12	TL	153 A6	1.70	3650
23.1 - 26	DW 20 B	-	587	1560	690	4545	STD	16	TL	159 A6	2.30	4375
23.1 - 26	DW 20 B	-	587	1560	690	4545	DB HD	18	TL	161 A6	2.60	4625
23.1 - 26	DW 20 B	-	587	1560	690	4545	HD DB SPL	18	TL	161 A6	2.60	4625
28L - 26	DW 25 B	DW 23 B	714	1560	690	4545	STD	12	TL	154 A6	1.40	3750
28L - 26	DW 25 B	DW 23 B	714	1560	690	4545	STD	16	TL	160 A6	1.90	4500
28L - 26	DW 25 B	DW 23 B	714	1560	690	4545	DB HD	20	TL	172 A6	2.80	6300

STD: Standard
DB HD: Dual Bead Heavy Duty
HD DB SPL: Heavy Duty Dual Bead Special



**MAIN APPLICATION:
TRAILER**



TR 391 (R-3)

TR 391 is an agro-industrial tire suitable for transport and compacting operations with trailers and compactors. TR 391 features outstanding flotation capability to avoid soil damages.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
24" 14.9 - 24	DW 13	DW 11; DW 13 L; DW 12	405	1255	563	3639	STD	6	TL	123 A6	1.40	1550
14.9 - 24	DW 13	DW 11; DW 12; DW 13 L	405	1255	563	3639	STD	8	TL	128 A6	1.80	1800

STD: Standard



BK 308

BK 308 has been specially designed for trailers and utility tractors. It features excellent traction on all surfaces and tread tie bars to reduce tread groove cracking. The strong casing provides excellent durability and puncture resistance whereas the special tread compound ensures a longer service life.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
20" 6.50 - 20	5.50 F	4.00 E; 5.00 F	190	865	-	-	STD	10	TT	112 A6	4.8	1120

STD: Standard



MAIN APPLICATION:
TRANSPORT



MH TR 182

MH TR 182 is suitable for transport operations with mobile home vehicles. It is a road-oriented, high-speed tire that significantly reduces fuel consumption. MH TR 182 ensures long durability and high performance along the entire product life-cycle.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 100 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
14.5" 8 - 14.5	6.00 MH	-	207	710	-	-	STD	8	TL	-	4.80	1030
8 - 14.5	6.00 MH	-	207	710	-	-	STD	10	TL	-	5.90	1180
8 - 14.5	6.00 MH	-	207	710	-	-	STD	12	TL	-	6.90	1285
8 - 14.5	6.00 MH	-	207	710	-	-	STD	14	TL	-	7.60	1390

STD: Standard



MAIN APPLICATION:
TRAILER



LT TR 182

LT TR 182 is suitable for transport operations on light trucks. This high-speed tire is road oriented and significantly reduces fuel consumption. The LT TR 182 tire is also easy to mount.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									bar	km/h
14.5" 8 - 14.5	6.00 MH	-	207	710	-	-	STD	12	TL	-	bar	6.90
											km/h	1285
											100 LS	1130
8 - 14.5	6.00 MH	-	207	710	-	-	STD	14	TL	-	bar	7.90
											km/h	1375
											100 LD	1210

STD: Standard



ST 195

ST 195 is a road-oriented tire for transport operations with mobile home vehicles. It provides significant fuel savings as well as an extended tire life-cycle. ST 195 allows carrying high loads at low pressure.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 10 KM/H	
	Rec.	Alt.									bar	max load (kg)
9" 6.00 - 9	4.00	-	165	540	-	-	STD	-	TT	-	6.90	2750
6.00 - 9											6.90	2750

STD: Standard



MAIN APPLICATION:
ATV



W 207

W 207 is BKT's all-terrain tire suitable for ATVs. Its design provides the best traction in any condition while the "E" marking allows the use on public roads. This tire features an excellent puncture resistance over challenging terrains.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									↓		
8"	AT 22 X 11 - 8	9.0 AT	8.5 AT	272	561	-	-	STD	6	TL	-	bar	0.45
												km/h	180
												100	180
9"	AT 22 X 11 - 9	9.0 AT	8.5 AT	272	561	-	-	STD	6	TL	-	bar	0.45
												km/h	180
	AT 25 X 12 - 9	9.5 AT	9.0 AT; 10.0 AT	300	632	-	-	STD	6	TL	-	bar	0.45
												km/h	224
AT 25 X 13 - 9	10.5 AT	10.0 AT	330	635	-	-	STD	6	TL	-	bar	0.45	
											km/h	243	
10"	AT 22 X 7 - 10	5.5 AT	6.0 AT	178	559	-	-	STD	6	TL	-	bar	0.45
												km/h	115
	AT 22 X 8 - 10	6.5 AT	6.0 AT	203	559	-	-	STD	6	TL	-	bar	0.45
												km/h	125
	AT 22 X 11 - 10	9.0 AT	8.5 AT	272	561	-	-	STD	6	TL	-	bar	0.45
												km/h	175
	AT 23 X 10 - 10	8.0 AT	7.5 AT; 8.5 AT	249	587	-	-	STD	6	TL	-	bar	0.45
												km/h	170
	AT 23 X 7 - 10	5.5 AT	6.0 AT	177	584	-	-	STD	6	TL	-	bar	0.45
												km/h	125
	AT 23 X 8 - 10	6.5 AT	6.0 AT	203	589	-	-	STD	6	TL	-	bar	0.45
												km/h	136
	AT 24 X 11 - 10	9.0 AT	8.5 AT	279	610	-	-	STD	6	TL	-	bar	0.45
												km/h	200
AT 25 X 11 - 10	9.0 AT	8.5 AT	285	640	-	-	STD	6	TL	-	bar	0.45	
											km/h	206	
AT 25 X 12 - 10	9.5 AT	9.0 AT; 10.0 AT	297	640	-	-	STD	6	TL	-	bar	0.45	
											km/h	224	

STD: Standard



MAIN APPLICATION:
ATV



W 207

W 207 is BKT's all-terrain tire suitable for ATVs. Its design provides the best traction in any condition while the "E" marking allows the use on public roads. This tire features an excellent puncture resistance over challenging terrains.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									↓		
11"	AT 23 X 8 - 11	6.5 AT	6.0 AT	203	584	-	-	STD	6	TL	-	bar	0.45
												km/h	80
	AT 24 X 8 - 11	6.5 AT	6.0 AT	203	612	-	-	STD	6	TL	-	bar	0.45
												km/h	80
	AT 24 X 9 - 11	7.0 AT	7.5 AT	226	610	-	-	STD	6	TL	-	bar	0.45
												km/h	80
AT 24 X 10 - 11	8.0 AT	7.5 AT; 8.5 AT	249	612	-	-	STD	6	TL	-	bar	0.45	
											km/h	80	180
AT 25 X 8 - 11	6.5 AT	6.0 AT	203	638	-	-	STD	6	TL	-	bar	0.45	
											km/h	80	161
AT 25 X 10 - 11	8.0 AT	7.5 AT; 8.5 AT	249	638	-	-	STD	6	TL	-	bar	0.45	
											km/h	80	190
12"	AT 24 X 8 - 12	6.5 AT	6.0 AT	198	615	-	-	STD	6	TL	-	bar	0.45
												km/h	80
	AT 25 X 8 - 12	6.5 AT	6.0 AT	198	638	-	-	STD	6	TL	-	bar	0.45
												km/h	100
	AT 25 X 8 - 12	6.5 AT	6.0 AT	198	638	-	-	SPL	6	TL	-	bar	0.45
												km/h	100
	AT 25 X 10 - 12	8.0 AT	6.5 AT; 7.5 AT; 8.5 AT	249	638	-	-	STD	6	TL	-	bar	0.45
												km/h	100
	AT 25 X 11 - 12	9.0 AT	8.5 AT	284	638	-	-	STD	6	TL	-	bar	0.45
												km/h	80
	AT 26 X 8 - 12	6.50 AT	6.00 AT	204	660	-	-	STD	6	TL	-	bar	0.45
												km/h	80
AT 26 X 10 - 12	8.0 AT	7.5 AT; 8.5 AT	241	658	-	-	STD	6	TL	-	bar	0.45	
											km/h	100	200
AT 26 X 12 - 12	9.5 AT	8.0 AT; 8.5 AT; 9.0 AT	299	658	-	-	STD	6	TL	-	bar	0.45	
											km/h	100	236

STD: Standard
SPL: Special



MAIN APPLICATION:
ATV



W 207

W 207 is BKT's all-terrain tire suitable for ATVs. Its design provides the best traction in any condition while the "E" marking allows the use on public roads. This tire features an excellent puncture resistance over challenging terrains.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									↓	
12" AT 27 X 10 - 12	8.0 AT	7.5 AT; 8.5 AT	241	683	-	-	STD	6	TL	-	bar	0.45
											km/h	
											100	222
AT 27 X 12 - 12	9.5 AT	8.5 AT; 9.0 AT	299	683	-	-	STD	6	TL	-	bar	0.45
											km/h	
											100	250
AT 28 X 10 - 12	8.0 AT	7.5 AT; 8.5 AT	241	706	-	-	STD	6	TL	-	bar	0.45
											km/h	
											100	231
AT 28 X 12 - 12	9.5 AT	8.5 AT; 9.0 AT	299	706	-	-	STD	6	TL	-	bar	0.45
											km/h	
											100	258

STD: Standard



AT 112

AT 112 is an all-terrain tire for ATVs. It is particularly suitable for loose surfaces.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 80 KM/H	
	Rec.	Alt.									↓	
8" AT 20 X 10 - 8	8.0 AT	7.5 AT; 8.5 AT	240	510	-	-	STD	4	TL	-	bar	max load (kg)
											1.50	541
10" AT 20 X 10 - 10	8.0 AT	7.5 AT; 8.5 AT	240	510	-	-	STD	4	TL	-	1.50	527
12" AT 23 X 10 - 12	8.0 AT	7.5 AT; 8.5 AT	240	585	-	-	STD	4	TL	-	1.50	618

STD: Standard



MAIN APPLICATION:
ATV



AT 108

AT 108 is an all-terrain tire suitable for ATVs. Its tread design provides excellent traction on loose surfaces.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									bar	km/h	
8"	AT 20 X 7 - 8	5.5 AT	6.0 AT	170	508	-	-	STD	4	TL	-	bar	0.35
												km/h	100
												bar	0.35
8"	AT 22 X 11 - 8	9.0 AT	8.5 AT	277	560	-	-	STD	4	TL	-	bar	0.35
												km/h	100
												bar	0.35
9"	AT 22 X 10 - 9	8.0 AT	7.5 AT; 8.5 AT	254	559	-	-	STD	4	TL	-	bar	0.35
												km/h	100
												bar	0.35
9"	AT 22 X 11 - 9	9.0 AT	8.5 AT	275	557	-	-	STD	4	TL	-	bar	0.35
												km/h	80
												bar	0.45
9"	AT 22 X 11 - 9	9.0 AT	8.5 AT	275	557	-	-	STD	6	TL	-	bar	0.45
												km/h	100
												bar	0.35
9"	AT 25 X 12 - 9	9.5 AT	9.0 AT; 10.0 AT	292	640	-	-	STD	4	TL	-	bar	0.35
												km/h	80
												bar	0.35
9"	AT 25 X 13 - 9	10.5 AT	10.0 AT	320	635	-	-	STD	4	TL	-	bar	0.35
												km/h	80
												bar	0.45
9"	AT 25 X 13 - 9	10.5 AT	10.0 AT	320	635	-	-	STD	6	TL	-	bar	0.45
												km/h	80
												bar	0.35
10"	AT 20 X 10 - 10	8.0 AT	7.5 AT; 8.5 AT	250	514	-	-	STD	4	TL	-	bar	0.35
												km/h	80
												bar	0.35
10"	AT 22 X 8 - 10	6.5 AT	6.0 AT	206	557	-	-	STD	4	TL	-	bar	0.35
												km/h	80
												bar	0.45
10"	AT 22 X 8 - 10	6.5 AT	6.0 AT	206	557	-	-	STD	6	TL	-	bar	0.45
												km/h	100
												bar	0.35
10"	AT 22 X 11 - 10	9.0 AT	8.5 AT	270	564	-	-	STD	4	TL	-	bar	0.35
												km/h	80
												bar	0.45
10"	AT 22 X 11 - 10	9.0 AT	8.5 AT	270	564	-	-	STD	6	TL	-	bar	0.45
												km/h	100
												bar	0.35
10"	AT 23 X 8 - 10	6.5 AT	6.0 AT	210	594	-	-	STD	4	TL	-	bar	0.35
												km/h	80
												bar	0.35
10"	AT 23 X 10 - 10	8.0 AT	7.5 AT; 8.5 AT	259	594	-	-	STD	4	TL	-	bar	0.35
												km/h	80
												bar	0.35

STD: Standard



MAIN APPLICATION:
ATV



AT 108

AT 108 is an all-terrain tire suitable for ATVs. Its tread design provides excellent traction on loose surfaces.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									bar	km/h	
10"	AT 24 X 11 - 10	9.0 AT	8.5 AT	284	608	-	-	STD	4	TL	-	bar	0.35
												km/h	175
	AT 24 X 11 - 10	9.0	-	284	608	-	-	STD	6	TL	-	bar	0.45
												km/h	200
10"	AT 25 X 12 - 10	9.5 AT	9.0 AT; 10.0 AT	298	630	-	-	STD	4	TL	-	bar	0.35
												km/h	195
	AT 25 X 12 - 10	9.5 AT	9.0 AT; 10.0 AT	298	630	-	-	STD	6	TL	-	bar	0.45
												km/h	224
11"	AT 22 X 7 - 11	5.5 AT	-	181	557	-	-	STD	4	TL	-	bar	0.35
												km/h	97.5
	AT 23 X 8 - 11	6.5 AT	6.0 AT	191	594	-	-	STD	4	TL	-	bar	0.35
												km/h	115
	AT 23 X 8 - 11	6.5 AT	6.0 AT	191	594	-	-	STD	6	TL	-	bar	0.45
												km/h	132
	AT 24 X 8 - 11	6.5 AT	6.0 AT	206	610	-	-	STD	4	TL	-	bar	0.35
												km/h	125
	AT 24 X 9 - 11	7.0 AT	7.5 AT	220	605	-	-	STD	4	TL	-	bar	0.35
												km/h	140
	AT 24 X 9 - 11	7.0 AT	7.5 AT	220	605	-	-	STD	6	TL	-	bar	0.45
												km/h	165
12"	AT 24 X 10 - 11	8.0 AT	7.5 AT; 8.5 AT	254	615	-	-	STD	4	TL	-	bar	0.35
												km/h	155
	AT 25 X 8 - 12	6.5 AT	6.0 AT	212	630	-	-	STD	4	TL	-	bar	0.35
												km/h	132
12"	AT 25 X 8 - 12	6.5 AT	6.0 AT	212	630	-	-	STD	6	TL	-	bar	0.45
												km/h	155
	AT 25 X 10 - 12	8.0 AT	6.5 AT; 7.5 AT; 8.5 AT	254	640	-	-	STD	4	TL	-	bar	0.35
												km/h	165
12"	AT 25 X 10 - 12	8.0 AT	6.5 AT; 7.5 AT; 8.5 AT	254	640	-	-	STD	6	TL	-	bar	0.45
												km/h	190

STD: Standard



MAIN APPLICATION:
ATV



AT 109

AT 109 is suitable for both all-terrain and lawn and garden applications with ATVs. AT 109 is the ideal tire on loose surfaces.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 80 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
6" AT 145 X 70 - 6	4.5		137	366	-	-	STD	2	TL	-	0.28	35
7" AT 16 X 8 - 7	6.5 AT	6.0 AT	183	419	-	-	STD	2	TL	-	0.21	52
8" AT 18 X 9.5 - 8	7.5 AT	8.0 AT	220	468	-	-	STD	2	TL	-	0.45	102
AT 20 X 7 - 8	5.5 AT	6.0 AT	170	504	-	-	STD	2	TL	-	0.45	100
AT 21 X 9 - 8	7.0 AT	6.5 AT; 7.5 AT	222	536	-	-	STD	2	TL	-	0.21	85
AT 22 X 11 - 8	9.0 AT	8.5 AT	230	579	-	-	STD	2	TL	-	0.21	112
9" AT 25 X 12 - 9	9.5 AT	9.0 AT; 10.0 AT	269	617	-	-	STD	2	TL	-	0.35	195

STD: Standard



MAIN APPLICATION:
ATV



AT 110

AT 110 is suitable for both all-terrain and lawn and garden applications with ATVs. AT 110 is the ideal tire on loose surfaces.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									↓		
8"	AT 20 X 7 - 8	5.5 AT	6.0 AT	183	508	-	-	STD	4	TL	-	bar	0.35
												km/h	88
												100	88
9"	AT 21 X 8 - 9	6.5 AT	6.0 AT	204	541	-	-	STD	4	TL	-	bar	0.35
												km/h	103
												80	103
10"	AT 21 X 7 - 10	5.5 AT	6.0 AT	178	531	-	-	STD	4	TL	-	bar	0.35
												km/h	93
												100	93
	AT 22 X 8 - 10	6.5 AT	6.0 AT	204	548	-	-	STD	4	TL	-	bar	0.35
												km/h	109
AT 23 X 7 - 10	5.5 AT	6.0 AT	178	584	-	-	STD	4	TL	-	bar	0.35	
											km/h	109	

STD: Standard



MAIN APPLICATION:
ATV



AT 111

AT 111 is suitable for all-terrain sport applications with ATVs. The tire is ideal for loose surfaces and provides excellent traction in all conditions.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									bar	km/h
8" AT 18 X 10 - 8	8.0 AT	7.5 AT; 8.5 AT	254	457	-	-	STD	2	TL	-	bar	0.25
											km/h	85
											80	85
AT 18 X 10 - 8	8.0 AT	7.5 AT; 8.5 AT	254	457	-	-	STD	4	TL	-	bar	0.35
											km/h	103
											100	103
AT 20 X 11 - 8	9.0 AT	8.5 AT	282	508	-	-	STD	6	TL	-	bar	0.45
											km/h	155
											80	155
AT 22 X 11 - 8	9.0 AT	8.5 AT	282	559	-	-	STD	6	TL	-	bar	0.45
											km/h	180
											100	180
9" AT 18 X 10 - 9	8.0 AT	7.5 AT; 8.5 AT	254	457	-	-	STD	4	TL	-	bar	0.35
											km/h	103
											100	103
AT 20 X 11 - 9	9.0 AT	8.5 AT	279	508	-	-	STD	4	TL	-	bar	0.35
											km/h	132
											80	132
AT 20 X 11 - 9	9.0 AT	8.5 AT	279	508	-	-	STD	6	TL	-	bar	0.45
											km/h	155
											100	155
AT 22 X 11 - 9	9.0 AT	8.5 AT	282	559	-	-	STD	4	TL	-	bar	0.35
											km/h	155
											80	155
AT 22 X 11 - 9	9.0 AT	8.5 AT	282	559	-	-	STD	6	TL	-	bar	0.45
											km/h	180
											100	180
10" AT 18 X 10 - 10	8.0 AT	7.5 AT; 8.5 AT	254	457	-	-	STD	4	TL	-	bar	0.35
											km/h	100
											100	100
AT 19 X 6 - 10	5.0	-	152	472	-	-	STD	4	TL	-	bar	0.95
											km/h	100
											80	100
AT 20 X 6 - 10	5.0	-	152	500	-	-	STD	2	TL	-	bar	0.70
											km/h	90
											80	90
AT 20 X 6 - 10	5.0	-	152	500	-	-	STD	4	TL	-	bar	0.95
											km/h	105
											100	105
AT 20 X 11 - 10	9.0 AT	8.5 AT	275	508	-	-	STD	6	TL	-	bar	0.45
											km/h	150
											100	150

STD: Standard



MAIN APPLICATION:
ATV



AT 111

AT 111 is suitable for all-terrain sport applications with ATVs. The tire is ideal for loose surfaces and provides excellent traction in all conditions.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									bar	km/h
10" AT 21 X 7 - 10	5.5 AT	6.0 AT	178	541	-	-	STD	4	TL	-	bar	0.35
											km/h	93
AT 21 X 7 - 10	5.5 AT	6.0 AT	178	541	-	-	STD	6	TL	-	bar	0.45
											km/h	106
AT 22 X 7 - 10	5.5 AT	6.0 AT	175	559	-	-	STD	4	TL	-	bar	0.35
											km/h	100
AT 22 X 11 - 10	9.0 AT	8.5 AT	282	559	-	-	STD	4	TL	-	bar	0.35
											km/h	150
AT 22 X 11 - 10	9.0 AT	8.5 AT	282	559	-	-	STD	6	TL	-	bar	0.45
											km/h	175
AT 22 X 7 - 10	5.5 AT	6.0 AT	175	559	-	-	STD	6	TL	-	bar	0.45
											km/h	115
AT 22 X 8 - 10	6.5 AT	6.0 AT	208	559	-	-	STD	6	TL	-	bar	0.45
											km/h	125
AT 23 X 7 - 10	5.5 AT	6.0 AT	178	584	-	-	STD	4	TL	-	bar	0.35
											km/h	109
AT 23 X 7 - 10	5.5 AT	6.0 AT	178	584	-	-	STD	6	TL	-	bar	0.45
											km/h	125

STD: Standard



MAIN APPLICATION:
ATV



AT 111 HD

AT 111 HD is suitable for all-terrain sport applications with ATVs on loose surfaces. The increased tread depth and the thick sidewall provide extra grip and braking control in addition to extraordinary traction and high-speed control in power slides. AT 111 HD features outstanding sidewall protection and ensures an extended tire life-cycle.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									bar	km/h	
9"	AT 20 X 11 - 9	9.0 AT	8.5 AT	275	515	-	-	HD	6	TL	-	bar	0.45
												100	155
	AT 22 X 11 - 9	9.0 AT	8.5 AT	279	560	-	-	HD	6	TL	-	bar	0.45
												100	180
10"	AT 20 X 11 - 10	9.0 AT	8.5 AT	279	505	-	-	HD	6	TL	-	bar	0.45
												100	150
	AT 21 X 7 - 10	5.5 AT	6.0 AT	178	533	-	-	HD	6	TL	-	bar	0.45
												100	106
	AT 22 X 7 - 10	5.5 AT	6.0 AT	174	560	-	-	HD	6	TL	-	bar	0.45
												100	115
	AT 22 X 11 - 10	9.0 AT	8.5 AT	279	560	-	-	HD	6	TL	-	bar	0.45
												100	175
	AT 23 X 7 - 10	5.5 AT	6.0 AT	174	585	-	-	HD	6	TL	-	bar	0.45
												100	125

HD: Heavy Duty



AT 119

AT 119 is an all-terrain tire suitable for ATVs. Its tread design provides excellent traction on loose surfaces.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 80 KM/H		
	Rec.	Alt.									bar	max load (kg)	
8"	AT 22 X 11 - 8	9.0 AT	8.5 AT	280	580	-	-	STD	2	TL	-	0.25	125
												0.35	155
	AT 22 X 11 - 8	9.0 AT	8.5 AT	280	580	-	-	STD	4	TL	-	0.35	155

STD: Standard

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
ATV



AT 171

AT 171 is suitable for on-and-off-the-road applications with ATV vehicles. The special directional and extra-deep tread design provides excellent traction on wet and muddy surfaces. AT 171 comes up with optimum self-cleaning properties along with extraordinary cut and chip resistance. The strong casing ensures extra durability and a long service life.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)			
	Rec.	Alt.									↓			
18"	9.5 - 18	W 8	-	241	900	417	2646	STD	8	TT/TL	90 A8/ 66 F	bar	1.40	1.00
												km/h		
												40 MUD BOGGING	600	-
												80 MUD BOGGING	300	-
												40 CASUAL TRANSPORT	-	490
												80 CASUAL TRANSPORT	-	245
20"	8.3 - 20	W 7	W 6	200	895	419	2670	STD	6	TT/TL	85 A8 / 61 F	bar	1.40	1.00
												km/h		
												40 MUD BOGGING	515	-
												80 MUD BOGGING	260	-
												40 CASUAL TRANSPORT	-	425
												80 CASUAL TRANSPORT	-	215
20"	9.5 - 20	W 8	W 7	235	950	442	2835	STD	6	TT/TL	93 A8 / 69 F	bar	1.40	1.00
												km/h		
												40 MUD BOGGING	645	-
												80 MUD BOGGING	325	-
												40 CASUAL TRANSPORT	-	530
												80 CASUAL TRANSPORT	-	265
22"	8.3 - 22	W 7	W 6	205	945	444	2778	STD	8	TT/TL	88 A8/ 64 F	bar	1.40	1.00
												km/h		
												40 MUD BOGGING	555	-
												80 MUD BOGGING	280	-
												40 CASUAL TRANSPORT	-	455
												80 CASUAL TRANSPORT	-	230
22"	9.5 - 22	W 8	W 7	235	1005	469	2955	STD	8	TT/TL	95 A8 / 71 F	bar	1.40	1.00
												km/h		
												40 MUD BOGGING	690	-
												80 MUD BOGGING	345	-
												40 CASUAL TRANSPORT	-	565
												80 CASUAL TRANSPORT	-	285

STD: Standard



MAIN APPLICATION:
ATV



BOGMAX

BOGMAX has been specially designed for mud bog racing. The very deep tread pattern ensures excellent traction in extremely wet and muddy conditions whereas the sidewall protectors reduce impacts and possible damages. BOGMAX is a 6-ply-rated tire for extra durability. It also features a cut-and-chip-resistant tread compound and outstanding self-cleaning properties.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 80 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
14" AT 30 X 10 - 14	7.0 AT	7.5 AT; 8.0 AT	260	760	-	-	STD	6	TL	58 F	0.50	236
32 X 10 - 14	8.0 AT	4.5 AT; 8.5 AT	250	810	-	-	STD	6	TL	62 F	0.50	265

STD: Standard



SIERRA MAX

SIERRA MAX is a radial tire which has been specially designed for ATVs in mud racing. Its radial construction provides a significantly smoother and more comfortable ride over rough terrains such as desert, dirt and rock. The special tread design ensures a wider footprint and outstanding forward and lateral traction. The unique shoulder bars provide best protection against sidewall damage. SIERRA MAX shows a cut and chip resistant tread compound and excellent self-cleaning.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 80 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
14" AT 26 X 9 R 14	7.00	-	230	675	-	-	STD	-	TL	48 F	0.50	180
AT 26 X 11 R 14	9.00	-	280	675	-	-	STD	-	TL	54 F	0.50	212
AT 27 X 9 R 14	7.00	-	230	700	-	-	STD	-	TL	50 F	0.50	190
AT 27 X 11 R 14	9.00	-	280	700	-	-	STD	-	TL	56 F	0.50	224

STD: Standard



MAIN APPLICATION:
GO KART



SM 48

SM 48 (GK) has been specially designed for go karts. Its smooth tread design provides excellent performance in sport activities. Shore A hardness 48.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									↓	
5" 10 X 4.5 - 5	4.5	-	130	260	-	-	STD	-	TL	-	bar	4.00
											km/h	130
11 X 7.10 - 5	6.75	-	190	295	-	-	STD	-	TL	-	bar	4.00
											km/h	135

STD: Standard



SM 54

SM 54 (GK) has been specially designed for go karts. Its smooth tread design provides excellent performance in sport activities. Shore A hardness 54.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									↓	
5" 10 X 4.5 - 5	4.5	-	130	260	-	-	STD	-	TL	-	bar	4.00
											km/h	130
11 X 7.10 - 5	6.75	-	190	295	-	-	STD	-	TL	-	bar	4.00
											km/h	135

STD: Standard



MAIN APPLICATION:
GO KART



SM 68

SM 68 has been specially designed for go karts. Its smooth tread design provides excellent performance in sport activities. Shore A hardness 68.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									↓	
5" 10 X 4.5 - 5	4.5	-	130	260	-	-	STD	-	TL	-	bar	4.00
											km/h	130
											-	-
11 X 7.10 - 5	6.75	-	190	295	-	-	STD	-	TL	-	bar	4.00
											km/h	135
											-	-
11 X 6.00 - 5	6.75	-	185	290	-	-	STD	-	TL	-	bar	3.86
											km/h	135
											-	-

STD: Standard

READING YOUR TIRE

This section is intended for operators from the agricultural, industrial or earthmoving sectors. It contains useful information about specific Off-Highway tire features as well as some recommendations for maintenance and storage.

The main information about your tire can be found right on the tire. You just need to know how to read it.



1	Sub brand name	6	Type of tire
2	Pattern name	7	Tire size
3	Load & speed index Load, speed, pressure details	8	Safety symbol
4	Weekly serial number	9	Brand name
5	Direction of rotation	10	Safety warning

These are the main parameters for measuring a tire:

Overall Diameter - OD

This parameter is measured after the tire being properly mounted on the reference rim and inflated at the pressure recommended by the manufacturer for at least 24 hours without any load.

Section Width - SW

This parameter indicates the outer sidewall distance without taking into consideration the prominences due to tire code marking. The section width is measured after the tire being properly mounted on the reference rim and inflated at the pressure recommended by the manufacturer for at least 24 hours without any load.

Overall Width - OW

This parameter indicates a tire’s section width at its largest point including all prominences such as tire code marking, sidewall lettering, tire brand, etc. The overall width is measured after the tire being properly mounted on the reference rim and inflated at the pressure recommended by the manufacturer for at least 24 hours without any load.

Section Height – SH

This parameter indicates the vertical section of the tire. It is calculated based on the overall diameter less the rim diameter divided by two.

Static Loaded Radius - SLR

This parameter indicates the vertical distance between the ground and the tire rotation axis. It is measured with the tire inflated at its nominal pressure, properly mounted on its reference rim at maximum load according to the values defined in the load index.

Static Loaded Width - SLW


This parameter indicates the outer distance between the tire sidewalls. It is measured with the tire inflated at its nominal pressure, properly mounted on its reference rim at maximum load according to the values defined in the load index.

Load Index

The load index is a numeric code that defines the tire’s maximum loading capacity in kg. For each tire type/size, the loading capacity is always related to a specific inflation pressure as defined by ETRTO standards and manufacturer specifications.

Speed Code

The speed code is a symbol that indicates the maximum speed admitted at the given load index, following any other specific conditions defined by the tire manufacturer.

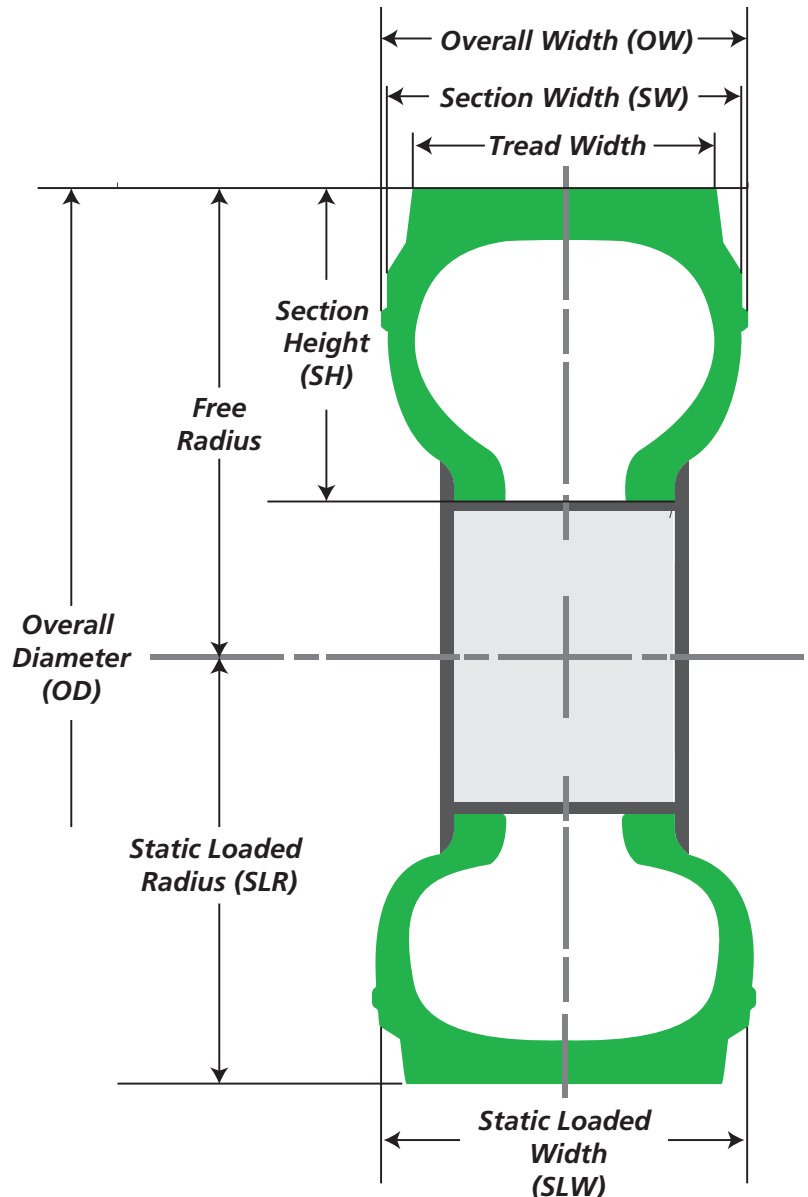

LOAD INDEX

LOAD INDEX	LOAD KG
50	190
51	195
52	200
53	206
54	212
55	218
56	224
57	230
58	236
59	243
60	250
61	257
62	265
63	272
64	280
65	290
66	300
67	307
68	315
69	325
70	335
71	345
72	355
73	365
74	375
75	387
76	400
77	412
78	425
79	437
80	450
81	462
82	475
83	487
84	500
85	515
86	530
87	545
88	560
89	580

LOAD INDEX	LOAD KG
90	600
91	615
92	630
93	650
94	670
95	690
96	710
97	730
98	750
99	775
100	800
101	825
102	850
103	875
104	900
105	925
106	950
107	975
108	1000
109	1030
110	1060
111	1090
112	1120
113	1150
114	1180
115	1215
116	1250
117	1285
118	1320
119	1360
120	1400
121	1450
122	1500
123	1550
124	1600
125	1650
126	1700
127	1750
128	1800
129	1850

LOAD INDEX	LOAD KG
130	1900
131	1950
132	2000
133	2060
134	2120
135	2180
136	2240
137	2300
138	2360
139	2430
140	2500
141	2575
142	2650
143	2725
144	2800
145	2900
146	3000
147	3075
148	3150
149	3250
150	3350
151	3450
152	3550
153	3650
154	3750
155	3875
156	4000
157	4125
158	4250
159	4375
160	4500
161	4625
162	4750
163	4875
164	5000
165	5150
166	5300
167	5450
168	5600

LOAD INDEX	LOAD KG
169	5800
170	6000
171	6150
172	6300
173	6500
174	6700
175	6900
176	7100
177	7300
178	7500
179	7750
180	8000
181	8250
182	8500
183	8750
184	9000
185	9250

LOAD INDEX	LOAD KG
186	9500
187	9750
188	10000
189	10300
190	10600
191	10900
192	11200
193	11500
194	11800
195	12150
196	12500
197	12850
198	13200
199	13600
200	14000
201	14500
202	15000

LOAD INDEX	LOAD KG
203	15500
204	16000
205	16500
206	17000
207	17500
208	18000
209	18500
210	19000
211	19500
212	20000
213	20600
214	21200
215	21800
216	22400
217	23000
218	23600
219	24300

SPEED SYMBOL

SPEED SYMBOL	A 2	A 4	A 6	A 8	B	C	D	E	F	G	J	K
SPEED Km/h	10	20	30	40	50	60	65	70	80	90	100	110

CONVERSION TABLE

RIM DIAMETER (inches)	SIZE (inches)	STANDARD								ROW CROP		SRI		
		SERIE 85	SERIE 80	SERIE 75	SERIE 70	SERIE 65	SERIE 60	SERIE 55	SERIE 50	SIZE (inches)	SERIE 90-95 METRIC			
		METRIC MARKING												
16					200/70 R16								330	
	6.00 - 16				220/70 R16 (4)								330	
	6.50 - 16				240/70 R16								350	
	7.50 - 16				260/70 R16	280/65 R16					-	180/95 R16	360	
18					280/70 R16	320/65 R16							390	
	7.50 - 18				280/70 R18	320/65 R18					-	210/95 R18	410	
20					260/70 R20								410	
	7.50 - 20				280/70 R20	340/65 R18							425	
	9.5 - 20	250/85 R20	260/80 R20		300/70 R20	340/65 R20					-	210/95 R20	450	
	11.2 - 20	280/85 R20			320/70 R20								475	
	12.4 - 20	320/85 R20	340/80 R20	340/75 R20	360/70 R20	420/65 R20								500
		250/85 R24			300/70 R24						-	210/90 R24	500	
	13.6 - 20			380/75R20	380/70 R20	440/65R20								525
24		280/85 R24	300/80R24		320/70 R24								525	
	8.3 - 24	280/85 R20			320/70 R20								475	
	9.5 - 24	320/85 R20	340/80 R20	340/75 R20	360/70 R20	420/65 R20							500	
		250/85 R24			300/70 R24						-	210/90 R24	500	
	11.2 - 24			380/75R20	380/70 R20	440/65 R20							525	
		280/85 R24	300/80R24		320/70 R24								525	
	12.4 - 24	320/85 R24	340/80R24		360/70 R24	420/65 R24							550	
		250/85 R28				340/65 R28					-	210/95 R28	550	
	13.6 - 24	340/85 R24			380/70 R24	440/65 R24								575
					400/70 R24									575
		280/85 R28			320/70 R28						8.3 R32	210/95 R32	575	
14.9 - 24	380/85 R24	400/80R24		420/70 R24	480/65 R24					9.5 R32	230/95 R32	600		
	320/85 R28			360/70 R28	420/65 R28							600		
	420/85 R24			480/70 R24	540/65 R24							625		
26	16.9 - 24	340/85 R28			380/70 R28	440/65 R28	480/60 R28						625	
	16.9 - 26		480/70 R26	540/65 R26									650	
		380/85 R28	400/80R28		420/70 R28	480/65 R28	520/60 R28						650	
		320/85 R32									9.5 R36	230/95R36	650	
	18.4 - 26				520/70 R26					750/50 R26			675	
		460/85 R26 (4)			580/70 R26								675	
		420/85 R28	440/80R28		480/70 R28	540/65 R28	600/60 R28						675	
		380/85 R30			420/70 R30						11.2 R36	270/95 R36	675	
		320/85R34									9.5 R38	230/95 R38	675	
	23.1 - 26 28 - L26									1000/50R25				750
				620/75 R26	650/70 R26	750/65 R26							750	
					600/70 R30 (1)		710/60R30 (2)	750/55R30					750	
						600/65 R32							750	
420/85 R34		440/80 R34	480/75R34	480/70 R34	540/65 R34								750	
340/85 R38			400/75 R38										750	
300/85 R42										9.5 R44	230/95 R44	750		
28	9.5 - 28	320/85 R24	340/80R24		360/70 R24	420/65 R24							550	
	11.2 - 28	250/85 R28			340/65 R28								550	
		340/85 R24			380/70 R24	440/65 R24							575	
	12.4 - 28				400/70 R24								575	
		280/85 R28			320/70 R28						8.3 R32	210/95 R32	575	
		380/85 R24	400/80R24		420/70 R24	480/65 R24					9.5 R32	230/95 R32	600	
	13.6 - 28	320/85 R28			360/70 R28	420/65 R28							600	
		420/85 R24			480/70 R24	540/65 R24							625	
	14.9 - 28	340/85 R28			380/70 R28	440/65 R28	480/60 R28				11.2 R32	270/95 R32	625	
					480/70 R26	540/65 R26							650	
		380/85 R28	400/80R28		420/70 R28	480/65 R28	520/60 R28				9.5 R36	230/95 R36	650	
	16.9 - 28	320/85 R32											675	
				520/70 R26					750/50 R26			675		
460/85 R26 (4)				580/70 R26								675		
420/85 R28		440/80R28		480/70 R28	540/65 R28	600/60 R28						675		
380/85 R30				420/70 R30						11.2 R36	270/95 R36	675		
									9.5 R38	230/95 R38	675			

Bold sizes: available in BKT

(1) also IF technology
(2) only IF technology

(3) also VF technology
(4) in development

For R2 type sizes please check SRI values on data book.

CONVERSION TABLE

RIM DIAMETER (inches)	STANDARD									ROW CROP				
	SIZE (inches)	SERIE 85	SERIE 80	SERIE 75	SERIE 70	SERIE 65	SERIE 60	SERIE 55	SERIE 50	SIZE (inches)	SERIE 90-95 METRIC	SRI		
		METRIC MARKING												
30	14.9 - 30	460/85 R26 (4)			520/70 R26				750/50 R26			675		
		420/85 R28	440/80R28		580/70 R26							675		
		380/85 R30			480/70 R28	540/65 R28	600/60 R28					675		
		320/85R34			420/70 R30						11.2 R36	270/95 R36	675	
											9.5 R38	230/95 R38	675	
	16.9 - 30				540/75R28		600/65R28						700	
		420/85 R30	440/80 R30		480/70 R30	540/65 R30	600/60 R30						700	
		320/85 R36									11.2 R38	270/95 R38	700	
						600/70 R28 (2)							725	
	18.4 - 30	460/85 R30	480/80 R30		520/70 R30	600/65 R30			710/55 R30				725	
		380/85R34											725	
		340/85 R36									9.5 R42	230/95 R42	725	
		320/85 R38									8.3 R44	210/95 R44	725	
					620/75 R30	650/70 R30	710/65R30					12.4 R42	320/90 R42	800
	23.1 - 30			540/75R34	600/70R34							11.2 R46	270/95 R46	800
		420/85 R38			480/70 R38	540/65 R38	600/60 R38				9.5 R48	230/95 R48	800	
32	8.3 - 32	340/85 R24			380/70 R24	440/65 R24						575		
					400/70 R24							575		
		280/85 R28			320/70 R28					8.3 R32	210/95 R32	575		
	9.5 - 32	420/85 R24			480/70 R24	540/65 R24						625		
		340/85 R28			380/70 R28	440/65 R28	480/60 R28			11.2 R32	270/95 R32	625		
	12.4 - 32				480/70 R26	540/65 R26						650		
		380/85 R28	400/80R28		420/70 R28	480/65 R28	520/60 R28					650		
		320/85 R32								9.5 R36	230/95R36	650		
	24.5 - 32			650/75 R32	680/70 R32		800/60 R32					825		
				620/75 R34		650/65 R34 (2)	710/60 R34 (2)				12.4 R46	320/90 R46	825	
		460/85 R38	480/80R38	520/75R38	520/70 R38	600/65 R38				12.4 R46	300/95 R46	825		
		340/85 R46								11.2 R48	270/95 R48	825		
					680/75 R32		800/65 R32		900/55 R32	1050/50R32			875	
	30.5 - L32			710/75 R32									875	
				650/75 R34	680/70 R34	750/65 R34							875	
		520/85 R38			580/70 R38	650/65 R38	710/60 R38						875	
				620/70 R38 (4)								875		
460/85 R42		480/80 R42			600/65 R42							875		
		420/80R46								14.9 R46	380/90 R46 (3)	875		
340/85 R48									12.4 R50	320/90 R50	875			
34	14.9 - 34				600/70 R28 (2)							725		
		460/85 R30	480/80 R30		520/70 R30	600/65 R30		710/55 R30				725		
		380/85R34										725		
		340/85 R36								9.5 R42	230/95 R42	725		
		320/85 R38								8.3 R44	210/95 R44	725		
	16.9 - 34								1000/50R25				750	
				620/75 R26	650/70 R26	750/65 R26							750	
					600/70 R30 (1)		710/60R30 (2)	750/55R30					750	
						600/65 R32							750	
		420/85 R34	440/80 R34	480/75R34	480/70 R34	540/65 R34							750	
		340/85 R38		400/75 R38									750	
	18.4 - 34	300/85 R42								9.5 R44	230/95 R44	750		
		460/85 R34	480/80R34	520/75 R34	520/70 R34	600/65 R34						775		
		380/85 R38	380/80 R38							11.2 R44	270/95 R44	775		
	23.1 - 34			650/75 R32	680/70 R32		800/60 R32						825	
				620/75 R34		650/65 R34 (2)	710/60 R34 (2)				12.4 R46	320/90 R46	825	
460/85 R38		480/80R38	520/75R38	520/70 R38	600/65 R38				12.4 R46	300/95 R46	825			
340/85 R46									11.2 R48	270/95 R48	825			

Bold sizes: available in BKT

(1) also IF technology
(2) only IF technology

(3) also VF technology
(4) in development

For R2 type sizes please check SRI values on data book.

CONVERSION TABLE

RIM DIAMETER (inches)	SIZE (inches)	STANDARD								ROW CROP		SRI			
		SERIE 85	SERIE 80	SERIE 75	SERIE 70	SERIE 65	SERIE 60	SERIE 55	SERIE 50	SIZE (inches)	SERIE 90-95 METRIC				
		METRIC MARKING													
36	12.4 - 36			540/75R28		600/65R28						700			
		420/85 R30	440/80 R30		480/70 R30	540/65 R30	600/60 R30					700			
		320/85 R36								11.2 - 38	270/95 R38	700			
	13.6 - 36					600/70 R28 (2)							725		
		460/85 R30	480/80 R30		520/70 R30	600/65 R30			710/55 R30				725		
		380/85R34											725		
		340/85 R36									9.5 R42	230/95 R42	725		
		320/85 R38									8.3 R44	210/95 R44	725		
														725	
	38	12.4 - 38				600/70 R28 (2)							725		
460/85 R30			480/80 R30		520/70 R30	600/65 R30			710/55 R30			725			
380/85R34													725		
340/85 R36											9.5 R42	230/95 R42	725		
		320/85 R38									8.3 R44	210/95 R44	725		
13.6 - 38					620/75 R26	650/70 R26	750/65 R26					1000/50R25	750		
						600/70 R30 (1)		710/60R30 (2)	750/55R30				750		
							600/65 R32						750		
		420/85 R34	440/80 R34	480/75R34	480/70 R34	540/65 R34							750		
		340/85 R38		400/75 R38							9.5 R44	230/95 R44	750		
		300/85 R42									9.5 R44	230/95 R44	750		
		14.9 - 38		460/85 R34	480/80R34	520/75 R34	520/70 R34	600/65 R34						775	
				380/85 R38	380/80 R38								11.2 R44	270/95 R44	775
						620/75 R30	650/70 R30	710/65R30					12.4 R42	320/90 R42	800
						540/75R34	600/70R34						11.2 R46	270/95 R46	800
16.9 - 38			420/85 R38			480/70 R38	540/65 R38	600/60 R38				9.5 R48	230/95 R48	800	
					650/75 R32	680/70 R32		800/60 R32					825		
					620/75 R34		650/65 R34 (2)	710/60 R34 (2)				12.4 R46	320/90 R46	825	
			460/85 R38	480/80R38	520/75R38	520/70 R38	600/65 R38					12.4 R46	300/95 R46	825	
			340/85 R46									11.2 R48	270/95 R48	825	
		20.8 - 38				680/75 R32		800/65 R32		900/55 R32	1050/50R32			875	
						710/75 R32								875	
						650/75 R34	680/70 R34	750/65 R34						875	
			520/85 R38			580/70 R38	650/65 R38	710/60 R38						875	
						620/70 R38 (4)								875	
460/85 R42			480/80 R42			600/65 R42							875		
			420/80R46								14.9 R46	380/90 R46 (3)	875		
340/85 R48											12.4 R50	320/90 R50	875		
42		16.9 - 42			650/75 R32	680/70 R32		800/60 R32					825		
					620/75 R34		650/65 R34 (2)	710/60 R34 (2)				12.4 R46	320/90 R46	825	
	460/85 R38		480/80R38	520/75R38	520/70 R38	600/65 R38				12.4 R46	300/95 R46	825			
		340/85 R46								11.2 R48	270/95 R48	825			
	18.4 - 42				680/75 R32		800/65 R32		900/55 R32	1050/50R32			875		
					710/75 R32								875		
					650/75 R34	680/70 R34	750/65 R34						875		
		520/85 R38			580/70 R38	650/65 R38	710/60 R38						875		
					620/70 R38 (4)								875		
		460/85 R42	480/80 R42			600/65 R42							875		
			420/80R46								14.9 R46	380/90 R46 (3)	875		
		340/85 R48									12.4 R50	320/90 R50	875		
	20.8 - 42		680/85R32		710/75R34	800/70R32		900/60R32					925		
					650/75R38	710/70R38							925		
		520/85 R42			580/70 R42	650/65 R42	710/60 R42			900/50 R42	12.4 R52	300/95 R52	925		
					620/70 R42						11.2 R54	270/95 R54	925		
		480/80 R46								12.4 R54	320/90 R54	925			

Bold sizes: available in BKT (1) also IF technology (2) only IF technology (3) also VF technology (4) in development For R2 type sizes please check SRI values on data book.

CONVERSION TABLE

RIM DIAMETER (inches)	SIZE (inches)	STANDARD								ROW CROP		
		SERIE 85	SERIE 80	SERIE 75	SERIE 70	SERIE 65	SERIE 60	SERIE 55	SERIE 50	SIZE (inches)	SERIE 90-95 METRIC	SRI
		METRIC MARKING										
46	14.9 - 46			680/75 R32		800/65 R32		900/55 R32	1050/50R32			875
				710/75 R32								875
				650/75 R34	680/70 R34	750/65 R34						875
		520/85 R38			580/70 R38	650/65 R38	710/60 R38					875
					620/70 R38 (4)							875
		460/85 R42	480/80 R42			600/65 R42						875
		420/80R46								14.9 R46	380/90 R46 (3)	875
		340/85 R48								12.4 R50	320/90 R50	875
	18.8 - 46	680/85R32		710/75R34	800/70R32		900/60R32					925
				650/75R38	710/70R38							925
		520/85 R42			580/70 R42	650/65 R42	710/60 R42		900/50 R42	12.4 R52	300/95 R52	925
					620/70 R42					11.2 R54	270/95 R54	925
		480/80 R46							12.4 R54	320/90 R54	925	
	20.8 - 46			800/75R32	900/70R32							975
		650/85 R38			800/70 R38		900/60 R38 (2)					975
				650/75R42	710/70 R42 (1)							975
		520/85 R46			620/70 R46	650/65 R46						975
			480/80R50							14.9 R50	380/90 R50	975
48	13.6 - 48			680/75 R32		800/65 R32		900/55 R32	1050/50R32			875
				710/75 R32								875
				650/75 R34	680/70 R34	750/65 R34						875
		520/85 R38			580/70 R38	650/65 R38	710/60 R38					875
					620/70 R38 (4)							875
		460/85 R42	480/80 R42			600/65 R42						875
	420/80R46								14.9 R46	380/90 R46 (3)	875	
	340/85 R48								12.4 R50	320/90 R50	875	
50	18.4 - 50			800/75R32	900/70R32							975
		650/85R38			800/70R38		900/60 R38 (2)				975	
				650/75R42	710/70 R42 (1)							975
		520/85 R46			620/70 R46	650/65 R46					975	
		480/80R50							14.9 R50	380/90 R50	975	
	-		710/75 R42			900/60 R42 (2)					1025	

Bold sizes: available in BKT

(1) also IF technology
(2) only IF technology

(3) also VF technology
(4) in development

For R2 type sizes please check SRI values on data book.

MOUNTING & DISMOUNTING

Whatever your field of application is - agriculture, construction, industry, or else - please be aware that both mounting and dismounting Off-Highway tires are hazardous operations. These must be performed by expert and qualified staff members only, using appropriate tools and procedures, as illustrated by the vehicle and machinery manufacturer.

Pressurized air used to inflate tires must always be controlled by means of an air pressure gauge.

Any non-compliance with the correct procedures may result in incorrect fitting of the tire on the rim and on the vehicle. This is a serious risk for the operator's safety.

Disclaimer of liability:

BKT does not undertake any responsibility in relation to the exactness or correctness of information or illustrations contained in this section. BKT declines any direct or indirect liability for any material damage or personal injury which might arise directly, indirectly or incidentally from the use of any information contained in this section. For any question in relation to specific operating issues always refer to the manufacturer of your vehicle or equipment.

MOUNTING PREPARATION

Before fitting the tire on the rim, make sure that the following mandatory aspects and requirements are met:

- Tire size and features must be suitable for the vehicle and the application to be used.
- The rime size to be used must be approved and contained in the BKT Technical Databook; it must be suitable for the tire size.
- Mounting and dismounting operations shall be performed by qualified and adequately trained technical staff or professionals only.
- Always refer to the instructions and procedures indicated by the rim, tire, and vehicle manufacturers.
- Use appropriate tools and equipment in good condition only.
- Using a wrong rim can limit the tire performance and cause its damage.

1 - Inspection and Cleaning

- Check the rim beforehand; use a metal brush to properly clean the entire surface and check its state.
- Never use rims with weld joints nor rims that are visibly deformed or damaged.
- The tire bead must be clean and without any elements that might cause an air lack.
- In case of mounting a tire that has already been used, accurately check both the tire's inside and outside for possible damages to be repaired.
- Do not mount tires with clear signs of strain.
- Use a compressor to clean and dry the inner part of the tire. Never use solvents.
- Check the tire beads and clean their surface with a dry cloth. Never use solvents.
- Only use new tubes (if applicable for the tire type) and new air valves (for tubeless tires).
- Do not use damaged or broken rims.
- The flange must be clean and smooth to ensure uniform adherence.
- Do not mount rims with worn surfaces.



2 - Inspection and Valve Mounting

- Place the rim on the mounting device.
- Before mounting the tire on the rim, check that the inflation valve functions properly.
- It is recommended to always use new valves at every mounting.



Valve inside




Valve outside

TIRE MOUNTING

1 - Lubrication of Tire Rim and Bead

- Use a soft-bristled brush to spread the lubricant over the surface.
- Use specific lubricants for tire mounting only.
- Do not use silicone or other solvent-based substances.



Rim



Tire beads

2 - Bead Positioning

- Place the tire bead on the rim channel.
- Make sure that at least part of the tire bead stays within the rim profile.
- The tire remains in position due to its weight and the ground contact during rim rotation.
- Start rotating the tire and position the tire bead gradually on the rim.
- Complete the rotation until the entire bead is positioned on the rim.
- Make sure that the entire bead is correctly fitted within the rim.



3 - Final Check

- Check that both tire beads are correctly positioned on the rim.
- Adjust the tire pressure according to manufacturer recommendations and the intended operating conditions.



TIRE LIFE & FAILURE

In several operating conditions, especially in agriculture, Off-Highway tires, need increased traction. Liquid ballasting can be useful to achieve major traction and higher adherence on the terrain as well as improved stability (lateral stiffness).

When filling the tire with liquid, it is recommended not to exceed 75% of its volume, in order to leave an air reserve of at least 25% of the tire volume. At any rate, it is important to inflate the tire at the pressure recommended by the manufacturer with reference to the loading conditions in order to maintain specific tire features such as elasticity.

In areas with a harsh climate, it is advised to add anti-freezing agents such as calcium chloride or magnesium chloride. It is highly recommended that these operations are carried out by a professional specialist only.


HANDLING & STORAGE

TIRE TRANSPORTATION

BKT tires are designed for the most differing applications in agriculture and manifold industrial sectors. Many Off-Highway tires are very heavy and difficult to be transported. Wrong transportation of a tire can cause serious damage. When transporting a tire, particular attention must be paid to make sure that neither the bead nor the inner part of the tire are damaged. Even the slightest damage of the bead can cause permanent damage due to air leakage resulting in tire underinflation and possible separation of the tire components.

In order to reduce the risk of damages or problems caused by wrong tire transportation or handling to a minimum, it is highly advised to observe the following recommendations:

- Do not lift the tire with a crane hook by leverage on the bead.
- Use large fibered straps, rubber slings or specific belts.
- Do not use ropes, steel slings or chains.
- Use a forklift for transport. The tire is to be lifted under the tread and not on the bead.

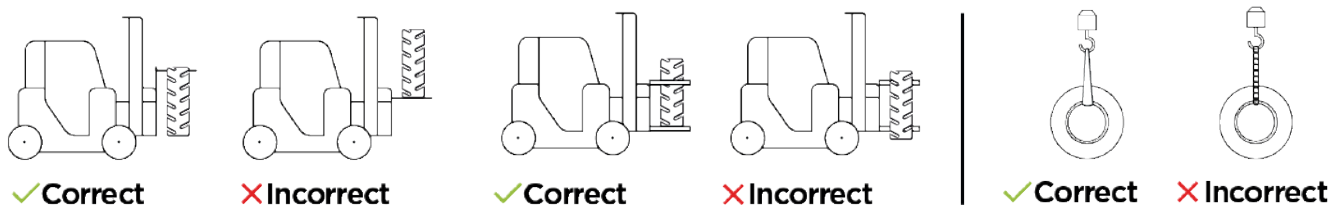


TIRE STORAGE

Whatever your field of application is – agriculture, earthmoving, industry, or else - Off-Highway tires are to be stored in a cool and dry place, away from direct sunlight, electric motors, oils, fuels, resins and other volatile substances in order to avoid any alteration of the chemical-physical features.


Should this not be possible, at least protect your tires with a waterproof tarpaulin to avoid contact with ultra-violet rays and bad weather.

Tires are to be placed vertically side by side. Do not stack one tire over the other horizontally.

Tubes and o-rings must be stocked in their original packing or stored unwrapped on racks or shelves, but never suspended.

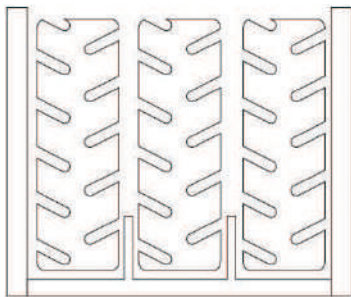

✓ **Correct**

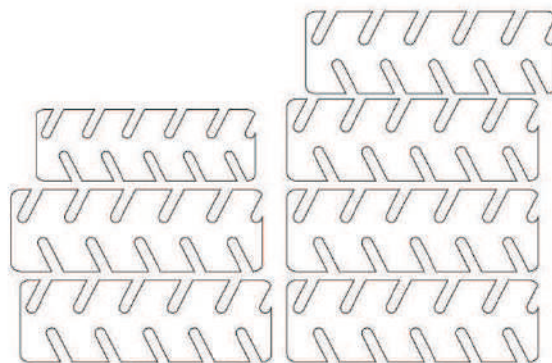

✗ **Incorrect**



Corporate Office

Balkrishna Industries Ltd.

BKT HOUSE, C/15, Trade World, Kamala Mills Compound, Senapati Bapat Marg, Lower Parel, Mumbai - 400013, India
Tel: (+91) 22-6666 3800 - Fax: (+91) 22-6666 3898/99 - e-mail: info@bkt-tires.com - bkt-tires.com

BKT Europe srl

Viale Della Repubblica, 133
20831 Seregno (MB), Italy
Tel: (+39) 0362 33 03 28
(+39) 0362 32 51 07
Fax: (+39) 0362 23 24 72

BKT USA Inc.

2660 West Market St. Suite 100
Fairlawn (Akron) OH 44333, USA
Tel: (+1) 330 836 1090
Fax: (+1) 330 836 1091
Toll Free: (+1) 888 660 0662

BKT TIRES (CANADA) Inc.

55 York Street, Suite 401
Toronto, Ontario M5J 1R7, Canada
Tel: AG/IND (+1) 905 641 5636
OTR (+1) 780 888 5667
Fax: (+1) 416 229 1711